DhruvaOne

FUNCTIONAL OVERVIEW

Every screen, function and interaction

Desktop app · Phone app · WhatsApp · B2B website

DOCUMENT
Functional overview for client review

VERSION
1.0 · 30 October 2026

DATA
All names, numbers and amounts in this document are sample data.

About this document

DhruvaOne is a school ERP that reaches people on four surfaces: a desktop web app for office roles, an iPhone and Android app, WhatsApp for people who prefer not to install anything, and a website that introduces the product and signs people in. This document describes what each surface does, role by role and screen by screen.

How the document is organised

Overview (the first pages)	What DhruvaOne is, who uses it and the ideas that run through every screen. Written for owners, trustees and principals; no technical knowledge needed.
Parts 1 to 6: the catalogue	One chapter per role or channel. Each chapter opens with the business summary and the role's day, then walks through every screen: what it shows, every function, every interaction, what Dhruva does there, and the rules that apply. Screenshots from the design are shown beside the text.
Appendices	A: technical notes per chapter (data, rules, integrations, scope). B: approvals, notifications and permissions per chapter. C: glossary.

Conventions

- **Labels in quotation marks** are the exact words on screen, so you can match them to the screenshots.
- **Desktop and phone.** Most roles exist on both. Where a function exists on one only, the text says so.
- **Sample data.** Screens use a made-up group (DPS Group, hero campus DPS Gurugram Sec 45, sample day Friday 9 October 2026) and a made-up standalone school (Saraswati Vidya Niketan, Karnal). Names, numbers and amounts are illustrations only.
- **Dhruva suggests, people decide.** Wherever Dhruva prepares something (a reply, a timetable, a payroll run), a named person reviews it before it changes a record or reaches a family.

Contents

Part 1 · Leadership and administration

Group Owner Desktop · Phone 7

Principal Desktop · Phone 18

Standalone School Admin Desktop · Phone 29

Part 2 · Academics

Academic Coordinator Desktop · Phone 37

Head of Department Desktop · Phone 45

Exam Cell Desktop · Phone 52

School Counsellor Desktop · Phone 59

Teacher Desktop · Phone 65

Part 3 · Operations

HR and Payroll Desktop · Phone 79

Finance and Accounts Desktop · Phone 88

Admissions and CRM Desktop · Phone 100

Security and IT Desktop · Phone 107

Transport and Bus Attendant Desktop · Phone 114

Part 4 · Families and students

Parent Phone 125

Student, Classes 6 to 8 Desktop · Phone 135

Student, Classes 9 to 12 Desktop · Phone 142

Part 5 · Channels

Phone app: sign-in, profiles and notifications iOS · Android 151

WhatsApp channel WhatsApp 168

B2B website Website (desktop and mobile) 179

Part 6 · Platform

Platform-wide topics All channels 196

Appendices

A · Technical notes 203

B · Approvals, notifications and permissions 209

C · Glossary 214

DhruvaOne in one page

One platform for a group of schools or a single school. Every person sees one short, ordered list of what needs them today, in the channel they already use, and Dhruva does the preparation.

Desktop app

For office roles: owner, principal, coordinator, HoD, exam cell, counsellor, HR, finance, admissions, security and IT, transport, teacher, and student desktop views.

Phone app (iOS and Android)

The same roles on the phone, plus parents, students and bus attendants. Sign in with a mobile number and a code; no passwords.

WhatsApp

For parents, teachers and support staff who do not want the app. The official school account answers from live data and hands over to a person when needed.

B2B website

Explains the product, trust and pricing, takes demo and pilot requests, and offers a mobile-number sign-in.

Ideas that run through every screen

- **One thing at a time.** Each role opens on a focus card with the single most urgent task, then a queue of what is next.
- **Dhruva prepares, a person approves.** Drafts, suggestions and schedules are always reviewable and attributed.
- **One number, many profiles.** A mobile number can hold several roles and schools that never mix, and switching is one tap.
- **Groups and standalone schools.** A group owner sees every campus and approves only what exceeds a campus limit; a standalone school has its own admin and trustee.
- **Runs on what schools already have.** No new hardware: staff phones and the school's existing records.

Roles and channels at a glance

Chapter	Where	What it does	Page
Group Owner	Desktop · Phone	One screen to see how all 14 campuses are doing, decide the few things that need the owner, bring new campuses onto DhruvaOne, and speak to every principal or teacher at once.	7
Principal	Desktop · Phone	Run one campus from one page: see who is in today, chase absence and fee dues, approve the few things only the principal can approve, speak to parents and staff, and (before go-live) confirm how the school runs in a nine-step setup.	18
Standalone School Admin	Desktop · Phone	A single person runs the whole school day from one page: attendance and cover, leave, fee reminders, salary, admissions enquiries, parent notices, timetable and exams, with the trustee seeing only what concerns the admin's own pay and refunds.	29
Academic Coordinator	Desktop · Phone	Keeps every period taught (cover for absent teachers), keeps the syllabus on pace, and builds, fixes and publishes the school timetable with Dhruva.	37
Head of Department	Desktop · Phone	Reviews the department's lesson plans, question papers and leave before they go up to the coordinator, exam cell or principal, and watches pace, results and homework for the subject.	45
Exam Cell	Desktop · Phone	Runs the whole exam cycle: question papers (moderate, print, seal), date sheets, seating and invigilation, marks checks, report-card compilation and CBSE board registration.	52
School Counsellor	Desktop · Phone	Handles teacher referrals, one-to-one and group sessions with private notes, quiet check-ins for students who may be struggling, Class 10 stream guidance and Class 12 plans after school, and parent workshops.	59
Teacher	Desktop · Phone	The teacher's day on one page: take attendance, enter marks from a photo, check homework Dhruva already marked, answer parents, and prepare papers, notes and lesson plans that Dhruva drafts and the teacher only edits and sends.	65
HR and Payroll	Desktop · Phone	One person runs staff records, attendance corrections, leave that affects pay, four separate payrolls, hiring, onboarding and exits for 296 staff, with Dhruva preparing each step and asking for one decision at a time.	79

Chapter	Where	What it does	Page
Finance and Accounts	Desktop · Phone	One calm screen that tells the accounts head what needs a decision today (move salary money, clear bank lines, fix Tally, approve bills), then shows the numbers; every rupee is checked, approved by a second person and posted to Tally automatically.	88
Admissions and CRM	Desktop · Phone	A simple admissions CRM where Dhruva rates every enquiry (hot, warm, cold), proposes exactly one next step per family, writes the WhatsApp, builds the campus-tour route, and keeps seats, offers and waitlists honest, from first enquiry to fee-paid admission.	100
Security and IT	Desktop · Phone	One desk for everything that can go wrong on campus, from an unknown man at a gate to a dead strongroom camera: every problem becomes a job, Dhruva suggests who should take it, and the in-charge assigns it in one tap.	107
Transport and Bus Attendant	Desktop · Phone	The attendant taps children and stops on the bus, and that tapping drives everything the in-charge sees, from where every bus is (no GPS needed) to the message each parent receives; the in-charge handles breakdowns, late buses, safety checks, route changes, fleet papers, transport fees and reports with Dhruva's drafts.	114
Parent	Phone	One calm phone app where a parent sees how each child is doing today, pays fees, talks to the right teacher, asks for leave, books a PTM slot, and follows the school bus.	125
Student, Classes 6 to 8	Desktop · Phone	A friendly, game-flavoured study companion: three small "quests" a day built from the teachers' own homework and notes, with XP, house points and badges, plus a hint-first way to ask a teacher.	135
Student, Classes 9 to 12	Desktop · Phone	An exam-focused, no-frills study planner: Dhruva reads her marks and date sheet and builds today's study plan, shows how ready she is for each exam, and answers doubts with hints before the teacher.	142
Phone app: sign-in, profiles and notifications	iOS · Android	One calm app, one mobile number and no password: the school's record is the account, one login opens every school and role linked to that number, and Dhruva (the orb) is the one colourful thing on every screen.	151
WhatsApp channel	WhatsApp	"No app? No problem. Just WhatsApp the school." Dhruva answers from the same live Dhruva One data and hands over to a person when it should.	168
B2B website	Website (desktop and mobile)	A single-page-style marketing site ("Learning, reimagined with AI.") that explains DhruvaOne, shows trust and governance, collects demo/pricing/pilot requests, and offers a mobile-number sign-in.	179

PART 1

Leadership and administration

Group Owner

Principal

Standalone School Admin

LEADERSHIP AND ADMINISTRATION · DESKTOP · PHONE

Group Owner

One screen to see how all 14 campuses are doing, decide the few things that need the owner, bring new campuses onto DhruvaOne, and speak to every principal or teacher at once.

Who uses it. Mr. V.K. Shunglu, Chairman, DPS Group (sample data: 14 campuses, 43,240 students, 2,976 staff). The group owner sits above every campus principal.

On the following pages:

- Overview (Desktop: "Overview" · Phone: "Home")
- Onboarding (Desktop only: "Onboarding", badge "1")
- Add a campus (Desktop only: opened from Onboarding "+ Add a campus"; board the desktop app opens straight on it)
- Campuses (Desktop: "Campuses" · Phone: "Campuses")
- Admissions (Desktop: "Admissions" · Phone: Insights > "Admissions")
- Insights (Phone only: "Insights" tab with chips Attendance, Admissions, Reports)
- Reports (Desktop: "Reports" · Phone: Insights > "Reports")
- Notices (Desktop: "Notices" · Phone: "Notices")
- Calendar (Desktop: "Calendar" · Phone: "Calendar")
- Approvals (Desktop: "Approvals" badge 3 · Phone: Home card "See all 3" opens an approvals page; Home tab badge)

Business summary

The Group Owner view turns 14 campuses into a short list of decisions and a few campuses worth a look. Instead of ringing principals for numbers, the chairman opens one page and is told "3 decisions are waiting for you and 2 campuses are worth a look. The other 12 are on track." He approves or declines the big requests that principals cannot decide alone (a large fee concession, a refund, new teaching posts), compares campuses on attendance, fee collection, new admissions and enquiries, and sends notices to principals, teachers or parents with read receipts. A guided onboarding area tracks the rollout of DhruvaOne to every campus (pilot first, then batches) and lets him add a new campus in about ten minutes. Everything here is read from the same records the campuses use, so the numbers match what the principal sees.

Daily story

Friday 9 Oct 2026, 9:40 am. Dhruva greets "Good morning, Mr. Shunglu" and shows one card at a time under "3 THINGS NEED YOU · 1 OF 3":

1. **50% concession for Term 2** (Kabir Singh, 8–B, Gurugram Sec 45, Rs 35,600): the first card, with **Approve** and **Later ›**. "Later" moves to the next card and the header counter advances.
2. "Up next" lists the other two in a short queue: **Refund on withdrawal** and **2 Maths teachers (PGT)**; a link **All approvals** opens the full approvals page (desktop) or "See all 3" (phone).
3. Below the queue sits the "NEEDS ATTENTION" campus card (Gurugram Sec 45, health score 78) with Dhruva's one-paragraph reason: attendance fell in Grades 9–12 after 29 Sep when pickups on bus routes 7 and 12 moved 35 minutes earlier, and the fee sheet has 12 rows with no dues date. **Open the campus ›** opens the campus drawer.
4. Group tiles: "Campuses on track 12 of 14 / 2 to watch", "Fees collected · Jul–Sep 92.7% / Rs 14.2 Cr still due", "New students · 2026–27 3,824 admission fee paid", "Onboarding 18 / 112 data sheets imported" (desktop only).
5. A campus comparison table (lowest health first) and "Coming up" calendar items (Term 1 exams begin 12 Oct, Dussehra 20 Oct, PTMs begin 24 Oct, Children's Day 14 Nov).

Screens

Overview (Desktop: "Overview" · Phone: "Home")

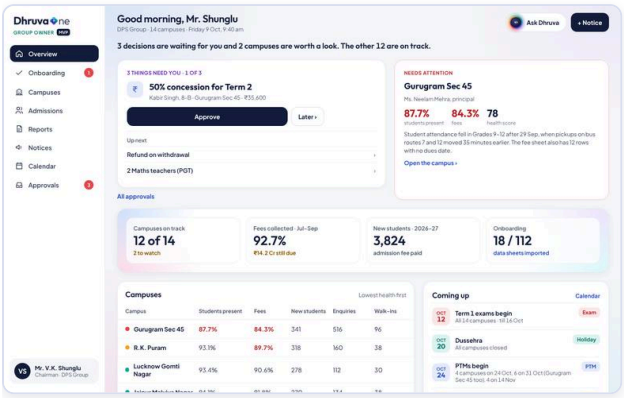

Desktop · Overview

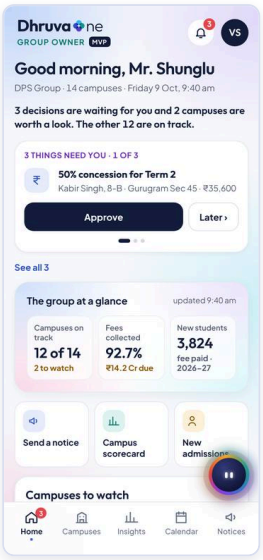

Phone · Home

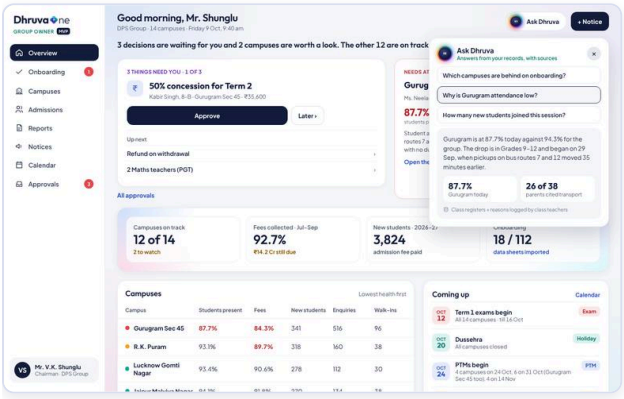

Desktop · Ask dhruva

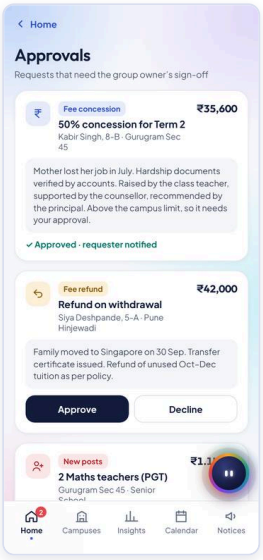

Phone · Approvals list

- What it shows: greeting and date line ("DPS Group · 14 campuses · Friday 9 Oct, 9:40 am"); the one-at-a-time decision card; the "Needs attention" campus; four group KPIs; (desktop) a table "Campuses · Lowest health first" with columns Campus, Students present, Fees, New students, Enquiries, Walk-ins (six rows visible, health order); "Coming up" calendar. Phone Home shows "The group at a glance · updated 9:40 am" with three tiles (Campuses on track 12 of 14, Fees collected 92.7%, New students 3,824), three shortcut buttons (**Send a notice**, **Campus scorecard**, **New admissions**), a "Campuses to watch" list (rule shown: "Student attendance or fees below 90%": Gurugram Sec 45 score 78, R.K. Puram score 84), and "Coming up across campuses".
- Functions:
- **Approve** (on the focus card): approves the request, the card shows a done state ("Approved · requester notified" on the approvals page) and a toast "Approved · <campus> notified" (desktop) / "Approved · requester notified" (phone). The header counter drops from 3 to 2 and the sidebar/tab badge on Approvals decrements (desktop badge "3"; phone Home badge shows 3 then 2 after one approval).
- **Later ›**: skips to the next decision without deciding.
- **Up next** rows (">"): jump the focus card to that item.
- **All approvals** / "See all 3": open the Approvals page.
- **Open the campus ›**: opens the campus drawer for Gurugram Sec 45.
- **Ask Dhruva** (desktop top-right) and the orb (phone): opens the assistant panel; see Dhruva section.
- **+ Notice** (desktop top-right) and **Send a notice** (phone): open the New notice form.
- Desktop campus table: each row opens the campus drawer.

- Phone: **Campus scorecard** goes to the Campuses tab, **New admissions** to Insights > Admissions.
- Interactions: Approve and Later change the focus card in place; nothing leaves the page. Toasts last about 2.5 seconds.
- Dhruva help on this screen: wording of the greeting ("3 decisions are waiting for you and 2 campuses are worth a look. The other 12 are on track."), the ranking of what needs the owner, the one-paragraph reason for the campus that needs attention, and the "Ask Dhruva" panel.

Onboarding (Desktop only: "Onboarding", badge "1")

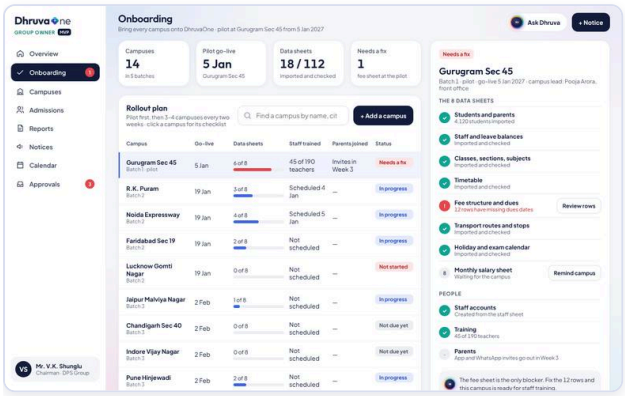

Desktop · Onboarding

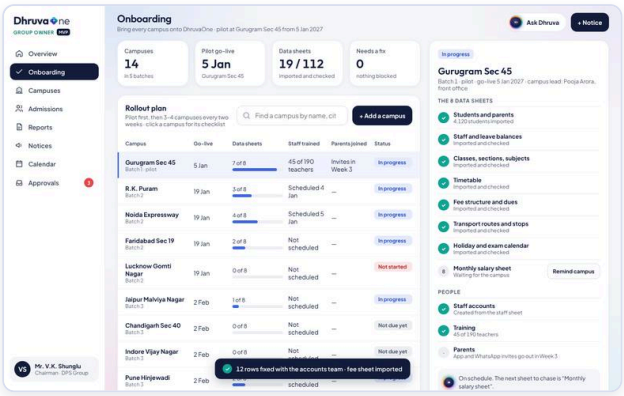

Desktop · Onboarding campus checklist

- What it shows: title "Onboarding" with subtitle "Bring every campus onto DhruvaOne · pilot at Gurugram Sec 45 from 5 Jan 2027". Four stat tiles: Campuses 14 "in 5 batches"; Pilot go-live 5 Jan "Gurugram Sec 45"; Data sheets 18 / 112 "imported and checked"; Needs a fix 1 "fee sheet at the pilot". A "Rollout plan" table: "Pilot first, then 3–4 campuses every two weeks · click a campus for its checklist" with columns Campus, Go-live, Data sheets (x of 8), Staff trained, Parents joined, Status. Batches as shown: Batch 1 pilot (Gurugram Sec 45, 5 Jan); Batch 2 (R.K. Puram, Noida Expressway, Faridabad Sec 19, Lucknow Gomti Nagar, 19 Jan); Batch 3 (Jaipur Malviya Nagar, Chandigarh Sec 40, Indore Vijay Nagar, Pune Hinjewadi, 2 Feb); Batch 4 (Ahmedabad SG Highway, Hyderabad Gachibowli, Kolkata Salt Lake, 16 Feb); Batch 5 (Chennai OMR, Bengaluru Whitefield, 2 Mar). Status labels: "Needs a fix", "In progress", "Not started", "Not due yet". Staff trained column shows examples "45 of 190 teachers", "Scheduled 4 Jan", "Not scheduled". Parents joined shows "Invites in Week 3" or a dash.
- Functions:
- **+ Add a campus** button above the table: opens the six-step wizard (see "Add a campus" below). If a draft was saved it reads "Continue <name> draft" and resumes at the saved step with a toast "Resumed <name> · step N of 6".
- Click any campus row: opens that campus's checklist panel below the table ("THE 8 DATA SHEETS").
- The eight data sheets listed in the checklist: Students and parents; Staff and leave balances; Classes, sections, subjects; Timetable; Fee structure and dues; Transport routes and stops; Holiday and exam calendar; Monthly salary sheet. Each shows a tick (done), "!" (problem) or a number (waiting).
- **Review rows** (on a sheet with a problem, e.g. "12 rows have missing dues dates"): marks the fee sheet fixed. Toast: "12 rows fixed with the accounts team · fee sheet imported". The "Needs a fix" tile drops to 0 ("nothing blocked"), data sheets rises to 19 / 112, and the pilot status becomes "In progress".
- **Remind campus** (on the next waiting sheet, e.g. "Monthly salary sheet · Waiting for the campus"): sends a reminder and a template to the campus lead. Toast: "Reminder sent to the campus lead with the template". The row then reads "Reminder sent today".
- People block: "Staff accounts" (created from the staff sheet), "Training" (shows "45 of 190 teachers" or "Scheduled..." or a **Schedule** button when not scheduled), "Parents" ("App and WhatsApp invites go out in Week 3" or "Invites go out once the student sheet is in").
- **Schedule** (training): toast "Training booked: teachers 45 min, accounts 2 hours · invites sent".
- Bottom hint line (Dhruva voice): "The fee sheet is the only blocker. Fix the 12 rows and this campus is ready for staff training." For a campus with nothing uploaded: "Nothing uploaded yet. Send the templates again and offer a 20–minute call with the campus lead." Otherwise: "On schedule. The next sheet to chase is...".
- Interactions: select a row, read its checklist, press the single highlighted action. The checklist header shows the batch, go-live date and campus lead (for the pilot: "campus lead: Pooja Arora, front office"; for others "principal's office").
- Dhruva help on this screen: Ask Dhruva answers "Which campuses are behind on onboarding?" (Gurugram has 6 of 8 sheets with 12 fee rows missing dues dates; Lucknow in Batch 2 has not started; Faridabad has 2 of 8). The checklist hint line is Dhruva's recommendation.
- Rules & edge cases: eight data sheets per campus is the unit of progress (18 of 112 = 14 campuses x 8). Staff accounts are created from the staff sheet once it is imported; parent invites wait for the student sheet. Campuses not yet due show "Not due yet".

Add a campus (Desktop only: opened from Onboarding "+ Add a campus"; board the desktop app opens straight on it)

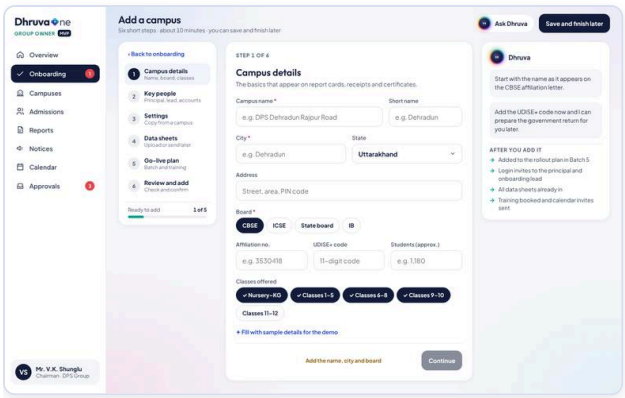

Desktop · Start

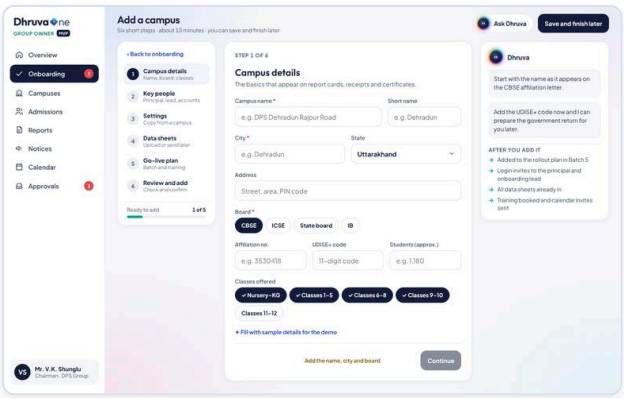

Desktop · Step1 details

- What it shows: page title "Add a campus", subtitle "Six short steps · about 10 minutes · you can save and finish later". A left rail (**‹ Back to onboarding** and six steps with a "Ready to add n of 5" progress bar), a centre form ("STEP n OF 6"), and a right Dhruva panel with tips and an "AFTER YOU ADD IT" checklist. The top bar has **Ask Dhruva** and **Save and finish later** (instead of "+ Notice").
- Functions, step by step:

1. **Campus details** ("The basics that appear on report cards, receipts and certificates."): Campus name (required, example "DPS Dehradun Rajpur Road"), Short name, City (required), State (select: Uttarakhand, Haryana, Delhi, Uttar Pradesh, Rajasthan, Punjab, Maharashtra, Karnataka, Telangana, Tamil Nadu, West Bengal, Gujarat, Madhya Pradesh), Address, Board (required: CBSE, ICSE, State board, IB), Affiliation no., UDISE+ code (11 digits), Students (approx.), Classes offered (toggles: Nursery–KG, Classes 1–5, Classes 6–8, Classes 9–10, Classes 11–12). A button "Fill with sample details for the demo" prefills Dehradun.
2. **Key people** ("They get their logins first and run the campus's onboarding."): Principal (name and 10–digit mobile required, email optional), Onboarding lead (name and mobile required; "Usually the office manager: fills the data sheets and books training."), Accounts head (optional), a toggle "Send login invites on WhatsApp and email when the campus is added", and a sample-fill button.
3. **Settings** ("Start from a campus that already works, then change only what is different."): "Copy settings from" a campus dropdown, then five checkable items: Grading scheme and report-card format (CBSE 9–point grades, term weightage 40/60); School timings and periods (8 periods of 40 minutes, 8:00 am to 2:15 pm); Fee heads, names only (tuition, transport, annual, activity, lab, books, uniform); Group holiday calendar; Approval limits ("Concessions above Rs 25,000 go to the owner"). Each shows chip "Copy" or "Set up later". Note shown: "Fee amounts are never copied: the campus enters its own in the fee sheet."
4. **Data sheets** ("Upload what you have now. Anything missing goes to the onboarding lead with a template."): header "n of 8 imported · n left for the campus", **Download all 8 templates** (toast "8 Excel templates downloaded"). Each of the 8 sheets has **Upload** and **Send later** (becomes **Undo**). Upload shows "Checking..." for about a second. The student sheet comes back with a problem ("1,174 rows fine · 6 rows have parent mobile numbers missing") offering **Fix 6 rows** (toast "6 parent numbers added from the admission forms") or **Import the rest** (1,174 imported, 6 sent to the lead). Other sheets import clean (examples: 86 staff; 38 sections and 11 subjects; 38 section timetables, 8 periods; 7 fee heads; 9 routes, 74 stops, 412 riders; 2026–27 session, 31 events; salary sheet "First upload due before go-live payroll").
5. **Go-live plan** ("Pick a rollout batch; training and parent invites are scheduled around it."): Rollout batch cards: "Batch 4" (16 Feb 2027, with Ahmedabad, Hyderabad, Kolkata), "Batch 5" (2 Mar 2027, with Chennai, Bengaluru), "With the new session" (1 Apr 2027). Teacher training (45 min) and Accounts training (2 hours) date choices that change with the batch (for Batch 4: 27, 28, 29 Jan). "WhatsApp number for parents": Use the group number / Campus's own number. "Fee payments go to": Campus bank account / Group account. A "Timeline for this campus": Today (invites to principal and onboarding lead), teacher-training date, parent invites date, go-live date.
6. **Review and add**: five summary cards (Campus, People, Settings, Data sheets, Go-live) each with **Edit**, and a "Still needed:" list if anything is missing. Primary button **Add campus**.

- Interactions:
- **Continue** is dimmed with a blocker line until the step is valid: step 1 "Add the name, city and board"; step 2 "Add the principal and onboarding lead with 10–digit mobiles"; step 4 "Upload or 'Send later' each sheet" or "Fix the 6 student rows or import the rest"; step 5 "Pick both training dates". Step 3 is always valid.
- Left-rail steps are clickable at any time; completed steps show a tick. **Back** moves one step back (hidden on step 1).
- **Save and finish later** stores a draft and returns to Onboarding with toast "Saved <name> as a draft · pick it up from Onboarding" (or "Nothing to save yet").
- **Add campus** (step 6) shows the success page "<Campus> is added" with "<batch> · goes live <date> · n of 8 data sheets already in", then four ticks: Invites sent (principal and onboarding lead get login links on WhatsApp, and email if given);

Templates sent (to the lead with a help-call link); Training booked; On the rollout plan. Buttons: **Add another campus** (fresh form), **Open in Onboarding** (the new campus appears as a row with batch, go-live date, sheets done and "Scheduled" training).

- A simpler quick-add dialog also exists in the code ("Add a campus": Campus name, Principal, Join which batch; "We will send the 8 data-sheet templates to the principal as soon as you add the campus"; toast "<name> added · templates sent to the principal") but the visible button opens the six-step wizard.
- Dhruva help on this screen: right-hand panel with tips that change by step, e.g. "I'll use 'Dehradun' on the app, WhatsApp messages and receipts"; "The UDISE+ code is in the right format. I'll use it to fill the annual UDISE+ return"; "Copying from <campus> brings over the grading scheme, period timings and approval limits, which saves about 3 days of setup"; "6 students in the sheet have no parent mobile number. Without one, their parents can't get absence or fee alerts"; "I check every upload for missing phone numbers, duplicate students and classes that don't exist"; "Train teachers before parents are invited"; "Batch 4 already has 3 campuses; the training team can take one more." Dhruva also pre-fills nothing without being asked: the "Fill with sample details" buttons are demo helpers.
- Rules & edge cases: the campus is added even with some items missing ("you can add the campus now and finish them from Onboarding") but the review shows "!" on incomplete cards. Fee amounts are never copied between campuses. Approval limit copied is the Rs 25,000 owner threshold.

Campuses (Desktop: "Campuses" · Phone: "Campuses")

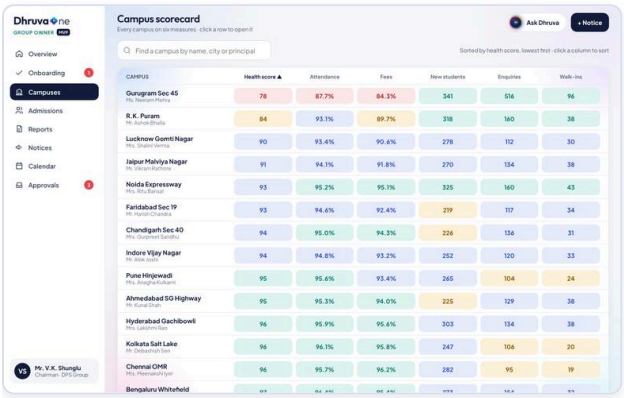

Desktop · Campuses

Phone · Campuses

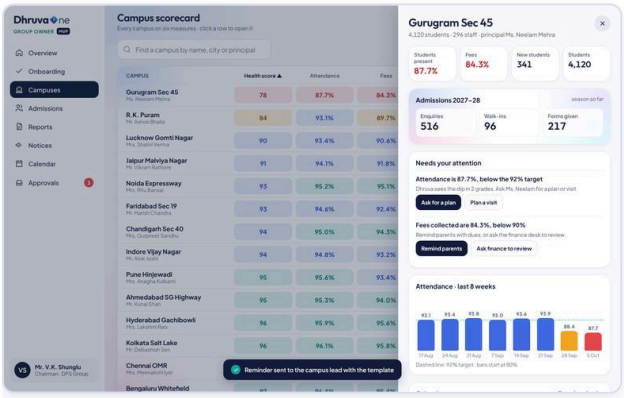

Desktop · Campus drawer

Phone · Campus detail

- What it shows: Desktop "Campus scorecard · Every campus on six measures · click a row to open it", a search box "Find a campus by name, city or principal", and a table of all 14 campuses sorted by health score, lowest first, with the principal's name under each campus and columns Health score, Attendance, Fees, New students, Enquiries, Walk-ins. Cells are colour coded with a legend "Strong / Fine / Watch / Act now". Footnote: "Attendance: today. Fees: Jul–Sep. New students: 2026–27, admission fee paid. Enquiries and walk-ins: admissions 2027–28." Phone shows "Campuses · 14 campuses · 43,240 students", a "Scorecard" with "92 GROUP HEALTH · 2 need attention · 12 on track", filter chips **All 14 / Needs attention · 2 / On track · 12**, a

bar chart ("Each bar is a campus · red and amber need attention", scored out of 100) and a card per campus (score, student count, "needs attention" or "on track", Attendance, Fees, Enquiries, Walk-ins).

- Functions: column headers are clickable to sort (desktop: "click a column to sort"); search filters rows; click a row (desktop) or tap a campus card (phone) to open the campus detail.
- Campus detail (desktop right drawer / phone full page with **Back**): title campus name; sub-line "4,120 students · 296 staff · principal Ms. Neelam Mehra" (phone: "health score 78"); KPI tiles (Students present, Fees, New students, Students); an "Admissions 2027–28" block (Enquiries 516, Walk-ins 96, Forms given 217 "at visits", with a caption that enquiries and walk-ins are logged by the front office); "Needs your attention" action cards; "Attendance · last 8 weeks" bars (17 Aug to 5 Oct, 92% dashed target, bars start at 80%, amber and red for low weeks, e.g. 88.4 and 87.7); a mini "Calendar" with **Open in calendar**; and two buttons **Message <principal first name>** and **Notice to this campus**.
- Action cards and their results (each action, once chosen, turns the card into a ticked line and toasts):
- Attendance below 92%: "Attendance is 87.7%, below the 92% target. Dhruva sees the dip in 2 grades. Ask Ms. Neelam for a plan or visit." **Ask for a plan** -> "Plan requested · reply due Mon" (toast "Asked Ms. Neelam for an attendance plan by Monday"); **Plan a visit** -> "Visit booked · Tue 13 Oct" (toast "Visit to <campus> booked for Tue 13 Oct · <principal> told").
- Fees below 90%: "Fees collected are 84.3%, below 90%. Remind parents with dues, or ask the finance desk to review." **Remind parents** -> "Reminder sent to parents with dues"; **Ask finance to review** -> "Finance desk asked to review".
- A healthy campus shows "Everything is on track. No action needed. You can still put a visit on the calendar." with **Plan a visit** and **Mark reviewed** ("Reviewed today").
- **Message <principal>**: opens Notices in one-to-one mode with that principal pre-selected. **Notice to this campus**: opens Notices in group mode with that campus selected and Principals and Teachers ticked. **Open in calendar**: opens Calendar filtered to that campus.
- Clicking a bar in the 8–week chart (desktop drawer) selects that week.
- Dhruva help: the action cards are Dhruva's suggestions ("Dhruva sees the dip in 2 grades"); Ask Dhruva "Why is Gurugram attendance low?" explains it (87.7% against 94.3% for the group; drop in Grades 9–12 from 29 Sep; 26 of 38 parents cited transport).
- Rules & edge cases: attendance below 92% (the group target) triggers the attendance card; fees below 90% triggers the fee card. Group health is 92 on phone; individual scores 78 (Gurugram) to 97 (Bengaluru).

Admissions (Desktop: "Admissions" · Phone: Insights > "Admissions")

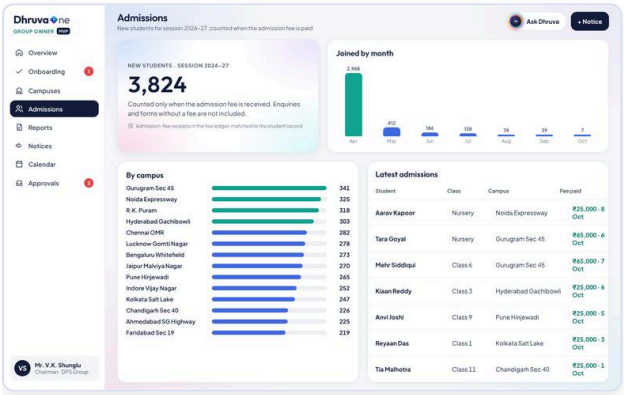

Desktop · Admissions

Phone · Insights

- What it shows: "NEW STUDENTS · SESSION 2026–27 3,824. Counted only when the admission fee is received. Enquiries and forms without a fee are not included." with the source line "Admission-fee receipts in the fee ledger, matched to the student record". "Joined by month" bars: Apr 2,968, May 412, Jun 186, Jul 138, Aug 74, Sep 39, Oct 7. "By campus" bars for all 14 (Gurugram Sec 45 341 highest, then Noida Expressway 325, R.K. Puram 318, Hyderabad Gachibowli 303... Faridabad Sec 19 219). "Latest admissions" list (student, class, campus, fee paid and date; for example Aarav Kapoor, Nursery, Noida Expressway, Rs 25,000 paid 8 Oct; Tara Goyal, Nursery, Gurugram Sec 45, Rs 65,000).
- Functions: view only (no buttons on this page).
- Dhruva help: Ask Dhruva "How many new students joined this session?" -> "3,824... 2,968 in April and 856 since. Gurugram Sec 45 added the most (341)."
- Rules & edge cases: a "new student" is counted only when the admission fee receipt exists; enquiry counts (admissions 2027–28) are separate and appear on the Campuses scorecard.

Insights (Phone only: "Insights" tab with chips Attendance, Admissions, Reports)

Phone · Insights

- What it shows: **Attendance** chip: "Weekly attendance · All 14 campuses · last 8 weeks 94.3%", a campus dropdown (All campuses or any one of the 14), an 8-bar chart (17 Aug 94.6… 5 Oct 94.3; dashed 92% target, bars start at 80%), the sentence "The group has stayed above the 92% target all term. The small dip since 28 Sep comes almost entirely from Gurugram Sec 45.", and "By campus today · Scorecard" bars lowest first (Gurugram 87.7%… Bengaluru 96.4%). **Admissions** chip: same as the desktop Admissions page. **Reports** chip: "Ready-made reports · Download now or email them, once or on a schedule" (see Reports).
- Functions: chips switch the view; the campus dropdown re-draws the weekly chart for the selected campus; **Scorecard** link jumps to Campuses.
- Rules: desktop has no separate attendance trend page; the same trend appears inside each campus drawer and the weekly chart in the AddCampus board's Overview ("Attendance today by campus" with initials GGN, RKP, LKO…).

Reports (Desktop: "Reports" · Phone: Insights > "Reports")

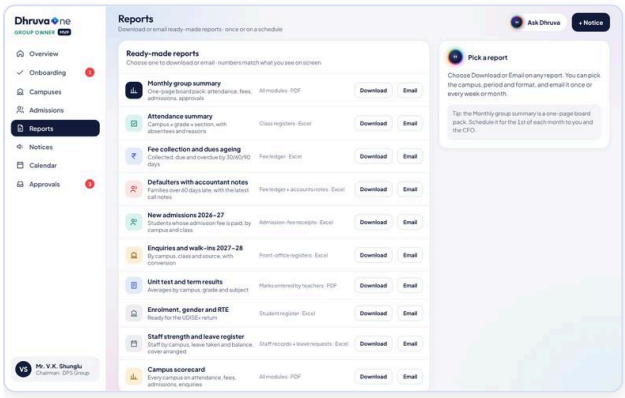

Desktop · Reports

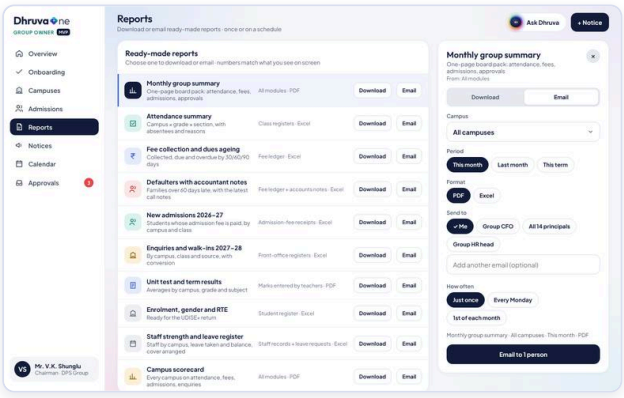

Desktop · Report email panel

- What it shows: ten ready-made reports, each with a title, one-line description, source and format, and **Download** and **Email** buttons; below, "Scheduled emails · 2 active".

1. Monthly group summary: "One-page board pack: attendance, fees, admissions, approvals" (All modules · PDF)
2. Attendance summary: campus x grade x section, with absentees and reasons (Class registers · Excel)
3. Fee collection and dues ageing: collected, due and overdue by 30/60/90 days (Fee ledger · Excel)
4. Defaulters with accountant notes: families over 60 days late, with latest call notes (Fee ledger + accounts notes · Excel)
5. New admissions 2026–27: students whose admission fee is paid, by campus and class (Excel)
6. Enquiries and walk-ins 2027–28: by campus, class and source, with conversion (Front-office registers · Excel)
7. Unit test and term results: averages by campus, grade and subject (Marks entered by teachers · PDF)
8. Enrolment, gender and RTE: "Ready for the UDISE+ return" (Student register · Excel)
9. Staff strength and leave register: by campus, leave taken and balance, cover arranged (Excel)
10. Campus scorecard: every campus on attendance, fees, admissions, enquiries (PDF)

- Functions: **Download** or **Email** opens a right-hand panel (desktop) with a Download/Email switch; **Campus** dropdown (All campuses or one campus); **Period** chips (This month, Last month, This term; report-specific); **Format** chips (PDF, Excel); for Email: **Send to** chips (Me, Group CFO, All 14 principals, Group HR head), an "Add another email (optional)" box (validated, "Check the email address"), and **How often** chips (Just once, Every Monday, 1st of each month). The primary button reads "Download PDF/Excel", "Email to n person/people", "Pick who gets it" (if nobody chosen) or "Schedule · <frequency>".
- Interactions / toasts: download -> "<Report> (<campus>, <period>) downloaded as <format>"; email once -> "<Report> emailed to n people"; scheduled -> "Scheduled · first email Mon 12 Oct, 8 am" (weekly) or "...1 Nov, 8 am" (monthly). Scheduled emails list shows each with format, schedule and recipients and a **Stop** link -> "Stopped · <report>". Sample active schedules: "Monthly group summary · PDF · 1st of every month, 8 am · To You, Mr. Anand Rao (CFO)" and "Fee collection and dues ageing · Excel · every Monday, 8 am · To You, all 14 principals". Sending to "All 14 principals" counts as 14 people.
- Dhruva help: a Dhruva tip box ("Pick a report... Tip: the Monthly group summary is a one-page board pack. Schedule it for the 1st of each month to you and the CFO.").
- Rules: "numbers match what you see on screen" (reports use the same records).

Notices (Desktop: "Notices" · Phone: "Notices")

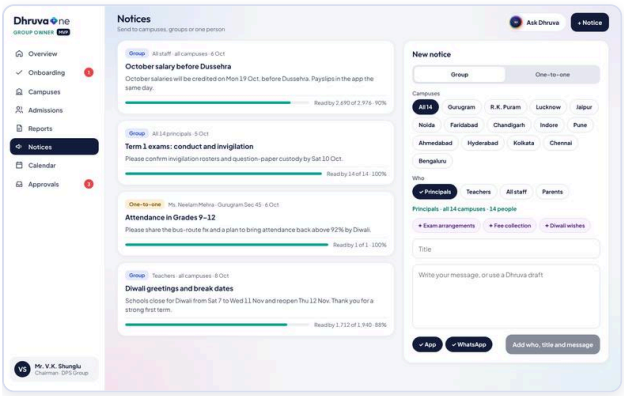

Desktop · Notices

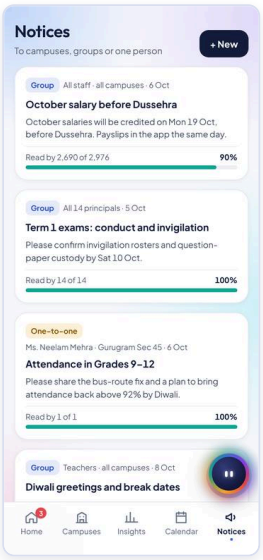

Phone · Notices

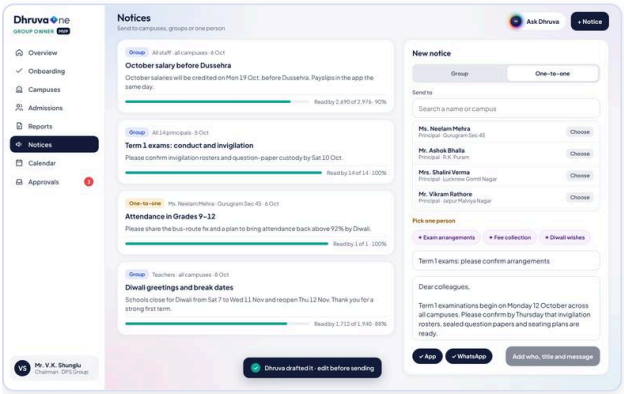

Desktop · Notice one to one

- What it shows: "Notices · Send to campuses, groups or one person". A history of sent notices with a type chip (Group or One-to-one), audience and date, title, body and a read bar: "October salary before Dussehra" (All staff, all campuses, 6 Oct, read 2,690 of 2,976, 90%); "Term 1 exams: conduct and invigilation" (All 14 principals, 5 Oct, 14 of 14, 100%); "Attendance in Grades 9–12" (one-to-one to Ms. Neelam Mehra, 6 Oct, 1 of 1, 100%); "Diwali greetings and break dates" (Teachers, all campuses, 8 Oct, 1,712 of 1,940, 88%). Footnote: "Read receipts from the app · delivery reports from WhatsApp Business".
- Functions (compose form, an inline panel on desktop and a bottom sheet "New notice" on phone, opened by **+ Notice** / **+ New**):
- Mode switch **Group** / **One-to-one**.
- Group: **Campuses** chips (All 14, or any one or several; picking specific campuses replaces "All 14") and **Who** chips (Principals, Teachers, All staff, Parents). A line shows the audience count, for example "Principals · all 14 campuses · 14 people".
- One-to-one: "Send to" search ("Search a name or campus") with a list of principals; picking one fills the person.
- **Draft with Dhruva** buttons: "Exam arrangements", "Fee collection", "Diwali wishes". Tapping one fills the title and message and shows toast "Dhruva drafted it · edit before sending". In one-to-one mode the greeting is rewritten to the chosen person's

name.

- Title and Message fields; channel chips **App** and **WhatsApp** (both on by default).
- Send button. Until who, title and message are filled it reads "Add who, title and message".
- Interactions: Send adds the notice at the top of the history ("Just now") and clears the form. Toast "Sent to n people" (group) or "Sent to <name>" (one-to-one). The new notice starts with a low read count (8% of the audience in the sample) and grows as people read.
- Dhruva help: the three draft buttons; Dhruva does not send anything without the owner pressing Send.
- Rules: read receipts come from the app; WhatsApp shows delivery reports. The owner can send to principals, teachers, all staff and parents of any campus or of the whole group.

Calendar (Desktop: "Calendar" · Phone: "Calendar")

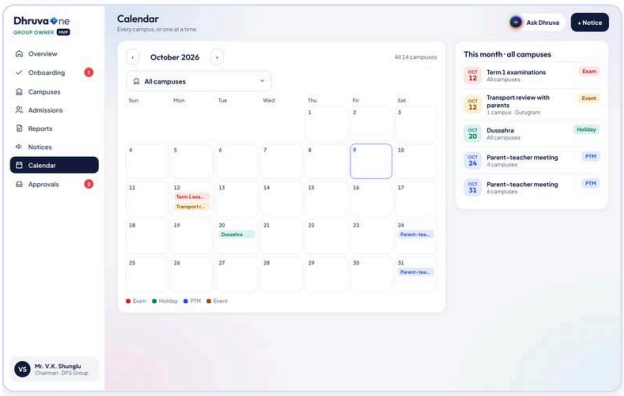

Desktop · Calendar

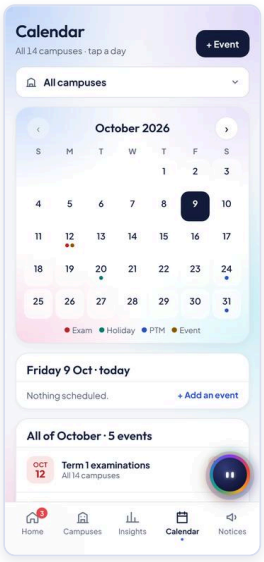

Phone · Calendar

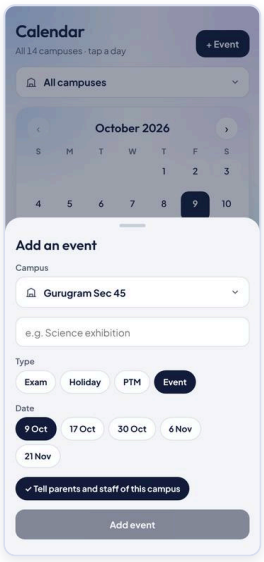

Phone · Add event sheet

- What it shows: "Calendar · Every campus, or one at a time". Month grid with prev/next arrows (October, November and December 2026), a Campus selector (desktop dropdown "All 14 campuses" and pills on phone; "All campuses" or any of 14), event colour legend (Exam, Holiday, PTM, Event) and the list "This month · all campuses" (desktop) / "All of October · 5 events" (phone). October items: 12 Oct Term 1 examinations (All 14 campuses); 12 Oct Transport review with parents (1 campus, Gurugram, Routes 7 and 12, 4 pm); 20 Oct Dussehra (All campuses, Holiday); 24 Oct Parent-teacher meeting (4 campuses); 31 Oct Parent-teacher meeting (6 campuses). November adds Diwali break (Sat 7 to Wed 11 Nov) and Children's Day 14 Nov.
- Functions: month arrows; campus filter; tap a day (phone) to see "Friday 9 Oct · today / Nothing scheduled." Phone has **+ Event** and **+ Add an event**: a sheet "Add an event" with Campus (choose one of 14), Type (Exam, Holiday, PTM, Event), Date (a short list of dates such as 9 Oct, 17 Oct, 30 Oct, 6 Nov, 21 Nov) and a toggle "Tell parents and staff of this campus"; **Add event** saves it as "Added by you · just now". Desktop calendar shows no add button.
- Footnote: "School calendars set up at go-live from each campus's holiday and exam list · principals add events".
- Rules: group view merges all campuses; campus filter narrows. Calendar is built at go-live from each campus's Holiday and exam calendar sheet.

Approvals (Desktop: "Approvals" badge 3 · Phone: Home card "See all 3" opens an approvals page; Home tab badge)

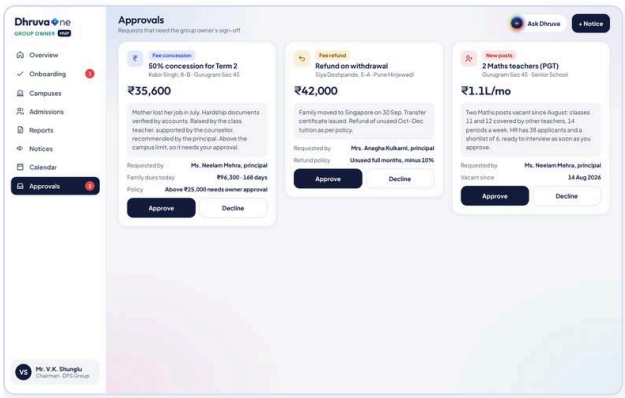

Desktop · Approvals

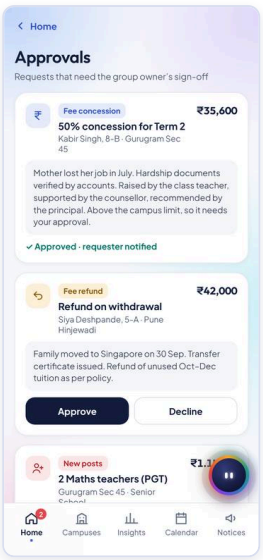

Phone · Approvals list

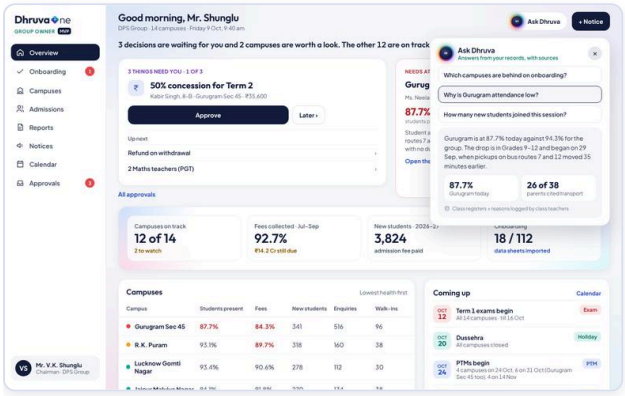

Desktop · Ask dhruva

- What it shows: "Approvals · Requests that need the group owner's sign-off". Three cards with kind chip, title, who/where, amount, a note, facts and buttons:

1. **Fee concession** "50% concession for Term 2": Kabir Singh, 8–B, Gurugram Sec 45, Rs 35,600. Note: mother lost her job in July; hardship documents verified by accounts; raised by the class teacher, supported by the counsellor, recommended by the principal; above the campus limit. Facts: Requested by Ms. Neelam Mehra, principal; Family dues today Rs 96,300 · 168 days; Policy "Above Rs 25,000 needs owner approval".
2. **Fee refund** "Refund on withdrawal": Siya Deshpande, 5–A, Pune Hinjewadi, Rs 42,000. Family moved to Singapore on 30 Sep, transfer certificate issued; refund of unused Oct-Dec tuition. Requested by Mrs. Anagha Kulkarni, principal. Refund policy: "Unused full months, minus 10%".
3. **New posts** "2 Maths teachers (PGT)": Gurugram Sec 45, Senior School, Rs 1.1L/mo. Two posts vacant since 14 Aug 2026; classes 11 and 12 covered by others, 14 periods a week; HR has 38 applicants and a shortlist of 6, ready to interview as soon as approved. Requested by Ms. Neelam Mehra.

- Functions: **Approve** / **Decline** on each card.
- Interactions: Approve -> card shows "Approved · requester notified" (green) and a toast "Approved · <place> notified" (desktop) or "Approved · requester notified" (phone). Decline -> card shows "Declined · requester notified" and toast "Declined · a note was sent". Phone footer text: "Raised by principals and accounts · every decision is logged". The badge count drops.
- Dhruva help: Dhruva summarises the case (who raised it, who supported it, what policy applies) in the card text and also orders the three on Home.
- Rules: concessions above Rs 25,000 need owner approval (policy shown on the card); refunds follow the stated policy; new teaching posts always come to the owner. Principals approve smaller items themselves (see principal file).

Gaps / differences between desktop and phone

- Onboarding and Add a campus exist only on desktop; Admissions and Reports are standalone pages on desktop but sit inside the Insights tab on phone.

- Desktop has a Group-level "Onboarding" tile on Overview and sortable campus table; phone has chips (All 14 / Needs attention / On track) and bar chart.
- Phone Calendar has **+ Event** and a per-day view; desktop Calendar has no add button.
- Desktop top bar has **Ask Dhruva** and **+ Notice**; phone uses the floating Dhruva orb and a "Send a notice" shortcut on Home.
- Approvals is a sidebar item on desktop but a full page reached from the Home card on phone (Home tab carries the badge).
- Desktop "Attendance" trend is only inside each campus drawer; phone has a dedicated Insights > Attendance chart with campus dropdown.
- Notices compose is a bottom sheet on phone and an inline panel on desktop.

LEADERSHIP AND ADMINISTRATION · DESKTOP · PHONE

Principal

Run one campus from one page: see who is in today, chase absence and fee dues, approve the few things only the principal can approve, speak to parents and staff, and (before go-live) confirm how the school runs in a nine-step setup.

Who uses it. the head of one campus. Two sample principals appear: Ms. Neelam Mehra, DPS Gurugram Sec 45 (a live campus, 4,120 students, 193 teachers, Fri 9 Oct 2026) and Mrs. Kavita Rawat, DPS Dehradun Rajpur Road (a campus being onboarded, go-live Mon 2 Mar 2027).

On the following pages:

- Today (Desktop: "Today" · Phone: "Today")
- Attendance (Desktop: "Attendance" · Phone: reached from Today > By class / By department)
- Absence watch (Desktop: "Absence watch", badge 7 · Phone: Today > "Absence watch")
- Fee defaulters (Desktop: "Fee defaulters" · Phone: "Fees" tab)
- Reports (Desktop: "Reports" · Phone: "Reports")
- Calendar (Desktop: "Calendar" · Phone: "Calendar")
- Approvals (Desktop: "Approvals", badge 11 · Phone: Today > "Approvals")
- Notices (Desktop: "Notices" · Phone: Today > "Notices")
- Me (Desktop: "Me", badge 4 · Phone: "Me")
- Setup journey: welcome, nine steps and finish (the desktop app: Desktop; phone not provided)

Business summary

The principal sees only their own campus. Each morning Dhruva puts the most urgent thing first (for Ms. Mehra: 6 sections have not marked attendance) and lets her clear the day one decision at a time. She can see student and teacher attendance down to the section, a watch list of students and teachers who are missing too much school, and a fee-defaulter list with the accounts team's call notes so she can message or meet a parent. Approvals bring results, staff leave, payroll, small concessions, teacher-drafted notices and safety incidents to one queue. Anything above her authority (for example a Rs 35,600 concession) goes to the group office instead. When a campus is new, the same person does a guided setup of timings, calendar, classes, subjects, staff, class teachers, student data and rules in about 40 minutes, and the group owner is told when it is done.

Daily story

Friday 9 Oct, 9:40 am. "Good morning, Ms. Mehra · DPS Gurugram Sec 45". The header reads "6 THINGS NEED YOU · 1 OF 6":

1. **6 sections haven't marked attendance** (4–C, 6–B, 7–D, 9–A, 11–C, 12–B): button **Remind teachers**. After pressing, toast "Reminder sent to 6 class teachers" and the queue becomes "5 THINGS NEED YOU".
2. **Unit test 3 results and report cards** (2,190 students): **Approve and publish**. 3–6. Four staff leave requests (Vikram Sethi casual, Meera Iyer sick, Manish Tyagi earned, Rahul Verma casual), shown under "Up next". **Later ›** moves past a card without deciding. Below: four KPI tiles (Students present 87.7%, "3,615 of 4,120 · group 94.3%"; Teachers in school 186 / 193, "7 on leave · cover by Mrs. Sinha"; Fees collected 84.3%, "Rs 2.91 Cr outstanding · Jul-Sep"; Approvals waiting 11), a bar chart "Student attendance by class" (Class 12 78.4% lowest, dashed 92% target, with the note "Classes 10–12 are lowest since bus routes 7 and 12 changed on 29 Sep"), "Who is in today" (Present 3,557, Late 58, Absent 505; teachers 186 in / 7 on leave), an **Absence watch** card (7 students below 85%, e.g. Rohan Tiwari 12–A 71.8%) and "Coming up".

Screens

Today (Desktop: "Today" · Phone: "Today")

Desktop · Today

Phone · Today

- What it shows: as in the Daily story. Phone Today also has "Students today · By class ›", "Teachers today · By department ›", "Absence watch · 7 students below 85%", "Approvals · 11 waiting" (red badge), "Notices · Send to parents or staff" and "Coming up". Desktop Today shows the class bar chart (click a class to see its sections, with an "All sections" link), "Who is in today" panels, the Absence watch list of five names, and "Coming up" (Term 1 examinations begin 12 Oct, Dussehra 20 Oct, Parent-teacher meeting 31 Oct, Children's Day 14 Nov).
- Functions: **Remind teachers**; **Later ›**; "Up next" rows; **Ask Dhruva** and **+ Notice** (desktop top bar); orb (phone). Phone cards open full pages: **By class** (opens "Students by class · Today · tap a grade, then a section": 14 grades with percentage; tap a grade to expand its sections with "n absent of 78"), **By department** (opens "Teachers today · 193 teachers · tap a department": e.g. Primary (PRT) 70 / 72, Science 26 / 28 expanding to "Arjun Menon · PGT Physics · sick leave today", "Anil Kapoor · TGT Science · casual leave today"), **Absence watch**, **Approvals**, **Notices**.
- Interactions: the Today card queue is shared with the Approvals page; deciding there removes the card here.
- Dhruva help: ranks the day's items and writes the card text ("Dhruva can remind the class teachers"). Ask Dhruva (desktop) offers four questions: "How are admissions going?" (612 enquiries for 2027–28, 184 toured, 96 offers, 58 admitted for 410 seats, Open House Sat 17 Oct with 126 families); "Which classes have the lowest attendance today?" (Class 12 78.4%, Class 11 81.2%, Class 10 84.0%); "Who owes the most fees in Class 12?" (Rohan Tiwari Rs 1.86 lakh disputes the transport charge; Tanya Gill Rs 54,000 on an instalment plan); "How many PGT posts are vacant?" (two PGT Maths vacant since 14 Aug; request with the chairman; HR has 6 shortlisted). Each answer shows two figures and a source line (e.g. "Admissions office · Ms. Bhardwaj", "Class registers marked by teachers today"). Free text outside these returns "In the MVP I answer questions about attendance, absence, fees, staff and notices at your school. Try a suggestion below."
- Rules & edge cases: only this campus is shown; "group 94.3%" is shown for comparison. Teacher cover is arranged by the academic coordinator, so the principal only sees who is away.

Attendance (Desktop: "Attendance" · Phone: reached from Today > By class / By department)

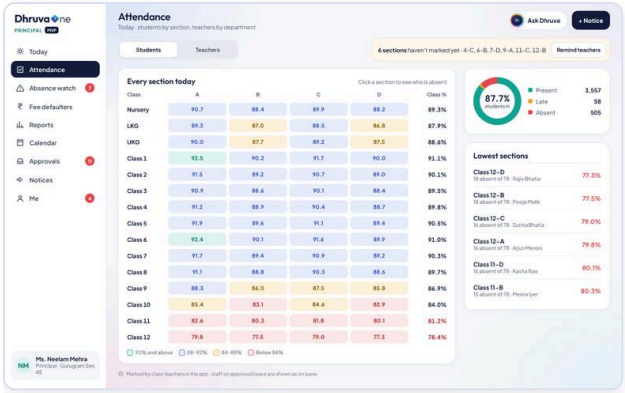

Desktop · Attendance

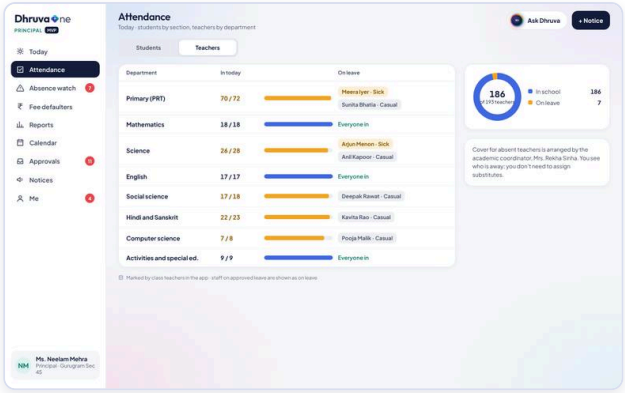

Desktop · Attendance teachers

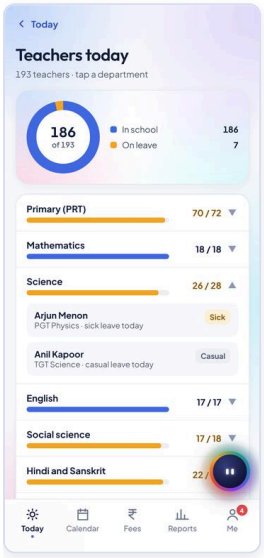

Phone · Teachers by department

- What it shows: a **Students | Teachers** switch. Students: "Every section today · Click a section to see who is absent", a heat table of Class x section (A, B, C, D) percentages and a Class % column (Nursery 89.3%... Class 12 78.4%), a legend (92% and above, 88–92%, 84–88%, Below 84%), the present/late/absent totals (87.7% students in; Present 3,557; Late 58; Absent 505), and "Lowest sections" (Class 12–D 18 absent of 78, Rajiv Bhatia, 77.3%; 12–B Pooja Malik 77.5%; 12–C Sunita Bhatia 79.0%; 12–A Arjun Menon 79.8%; 11–D Kavita Rao 80.1%; 11–B Meera Iyer 80.3%; the name is the class teacher). Teachers: table by department with In today / On leave names (Primary PRT 70/72; Mathematics 18/18 "Everyone in"; Science 26/28; English 17/17; Social science 17/18; Hindi and Sanskrit 22/23; Computer science 7/8; Activities and special ed. 9/9) and the note "Cover for absent teachers is arranged by the academic coordinator, Mrs. Rekha Sinha. You see who is away; you don't need to assign substitutes."
- Footnote: "Marked by class teachers in the app · staff on approved leave are shown as on leave" (phone: "parents of absent children alerted at 9:45 am").
- Rules: attendance is marked by class teachers; staff on approved leave count as on leave, not absent.

Absence watch (Desktop: "Absence watch", badge 7 · Phone: Today > "Absence watch")

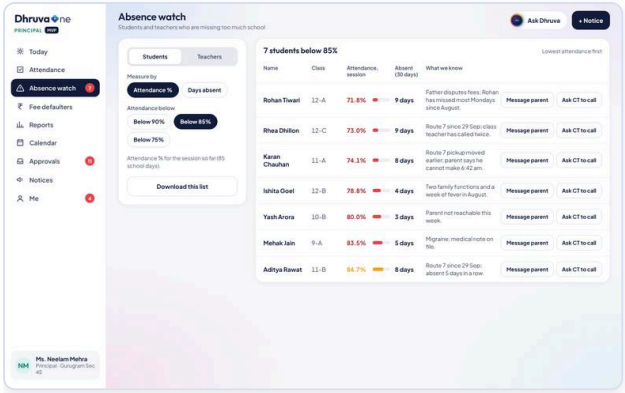

Desktop · Absence watch

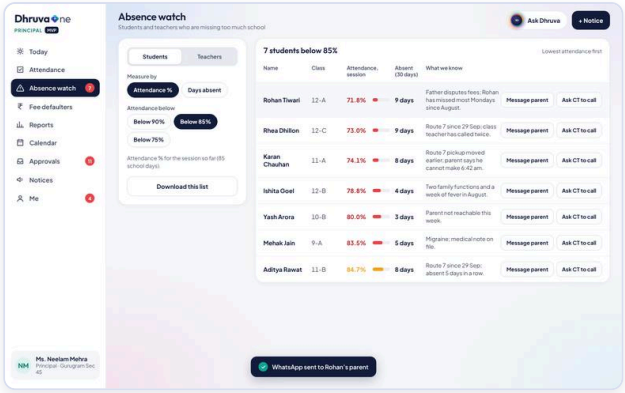

Desktop · Absence watch actions

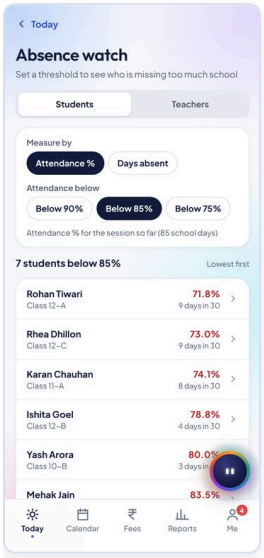

Phone · Absence watch

- What it shows: "Absence watch · Students and teachers who are missing too much school". Filters: Students | Teachers; "Measure by" Attendance % or Days absent; threshold chips "Attendance below" Below 90% / Below 85% / Below 75% (students) or "Absent at least" 3+ days / 5+ days / 8+ days (teachers). Default is 85% giving "7 students below 85% · Lowest attendance first" with columns Name, Class, Attendance (session, 85 school days), Absent (30 days), What we know. Rows: Rohan Tiwari 12–A 71.8% 9 days "Father disputes fees; has missed most Mondays since August"; Rhea Dhillon 12–C 73.0% "Route 7 since 29 Sep; class teacher has called twice"; Karan Chauhan 11–A 74.1% "Route 7 pickup moved earlier; parent says he cannot make 6:42 am"; Ishita Goel 12–B 78.8%; Yash Arora 10–B 80.0% "Parent not reachable this week"; Mehak Jain 9–A 83.5% "Migraine; medical note on file"; Aditya Rawat 11–B 84.7%. Teachers view: "1 teacher absent 5+ days" (Pooja Malik, TGT Computer science, 84.2%, 5 days, "Two family emergencies in September") covering "last 30 school days (26 Aug - 9 Oct)".
- Functions: **Download this list** (toast "Absence watch list downloaded (Excel)"); per student **Message parent** (sends a WhatsApp at once, toast "WhatsApp sent to Rohan's parent") and **Ask CT to call** (toast "Class teacher asked to call home today"); per teacher **Message** (toast "Message sent to Pooja Malik") and **Meet** (toast "Meeting request sent for Monday, 2 pm").
- Interactions: one tap, no confirmation dialog; the toast confirms.
- Dhruva help: the "What we know" notes combine class-teacher remarks and Dhruva's pattern finding (Route 7 since 29 Sep).
- Rules: CBSE needs 75% to sit board exams, so the default flag is 85% (Dhruva note in setup). The thresholds here can be changed per view; the setup rule "Absence watch: Flag students below" sets the default.

Fee defaulters (Desktop: "Fee defaulters" · Phone: "Fees" tab)

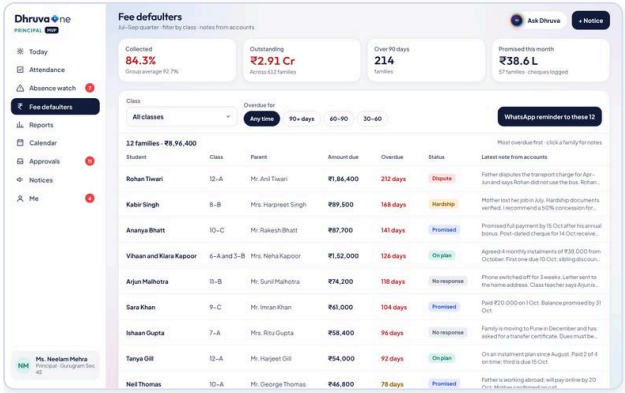

Desktop · Fee defaulters

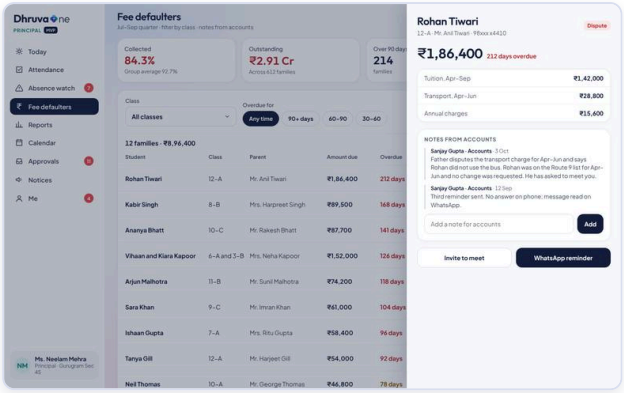

Desktop · Defaulter drawer

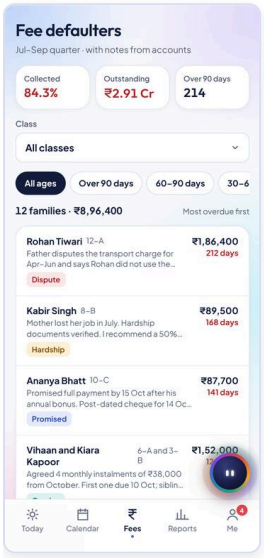

Phone · Fees

- What it shows: "Fee defaulters · Jul–Sep quarter · filter by class · notes from accounts". Tiles: Collected 84.3% (group average 92.7%); Outstanding Rs 2.91 Cr (across 612 families); Over 90 days 214 families; Promised this month Rs 38.6 L (57 families, cheques logged). Filters: Class dropdown (All classes, Class 3… Class 12 "all sections", or a section such as 3–A, 12–A) and "Overdue for" chips Any time / 90+ days / 60–90 / 30–60. A list header "12 families · Rs 8,96,400 · Most overdue first · click a family for notes" with columns Student, Class, Parent, Amount due, Overdue, Status (Dispute, Hardship, Promised, On plan, No response) and the latest accounts note. Rows: Rohan Tiwari 12–A Rs 1,86,400 212 days Dispute; Kabir Singh 8–B Rs 89,500 168 days Hardship ("I recommend a 50% concession for Term 2 (Rs 35,600); it has gone to the group office"); Ananya Bhatt 10–C Rs 87,700 141 days Promised (post-dated cheque 14 Oct); Vihaan and Kiara Kapoor 6–A and 3–B Rs 1,52,000 On plan (4 instalments of Rs 38,000); Arjun Malhotra 11–B No response; Sara Khan 9–C Promised; Ishaan Gupta 7–A No response (TC needs dues cleared); Tanya Gill 12–A On plan; Neil Thomas 10–A; Aanya Gupta 5–B; Reyansh Pal 3–A; Kiara Jain 6–C. Footer on phone: "Fee ledger · notes are written by Sanjay Gupta and Priya Nair in accounts".
- Functions: filters; the button **WhatsApp reminder to these 12** (phone: "Send WhatsApp reminder to these 12"): toast "Fee reminder sent on WhatsApp to 12 families" and each row then reads "Reminder sent today". Click a family: a drawer (desktop) / sheet (phone) with name, class, parent and masked phone (98×xx x4410), status chip, amount and days overdue, a breakdown (Tuition Apr-Sep Rs 1,42,000; Transport Apr-Jun Rs 28,800; Annual charges Rs 15,600), "NOTES FROM ACCOUNTS" (dated entries by Sanjay Gupta, Accounts), an **Add** box ("Add a note for accounts"; toast "Note added · accounts can see it"), **Invite to meet** (toast "Meeting invite sent to <parent> for Mon 12 Oct, 2 pm") and **WhatsApp reminder** (toast "WhatsApp reminder sent to <parent>").
- Rules & edge cases: filters change the "n families · amount" total and the button label. The Rs 35,600 concession for Kabir Singh is above the principal's Rs 25,000 limit, so it has been sent to the group owner (it appears in the owner's approvals).

Reports (Desktop: "Reports" · Phone: "Reports")

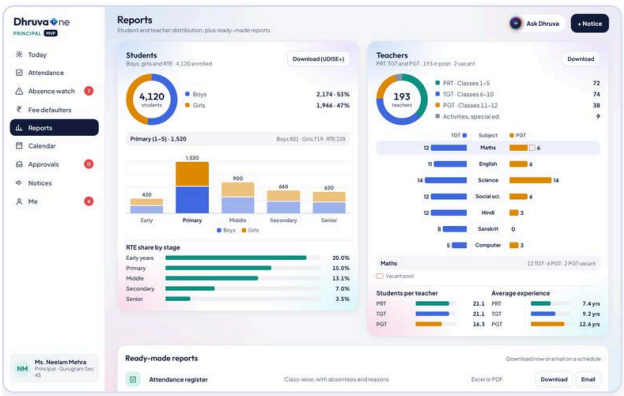

Desktop · Reports

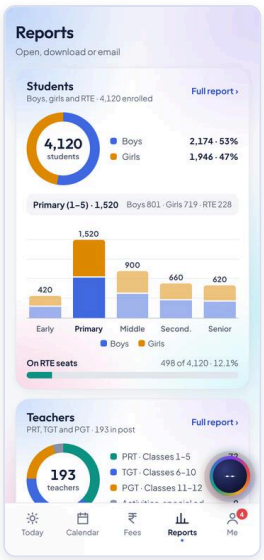

Phone · Reports

- What it shows: two distribution panels and a ready-made report list. **Students** (4,120 enrolled): Boys 2,174 (53%), Girls 1,946 (47%); stage bars (Early 420, Primary 1,520, Middle 900, Secondary 660, Senior 620; boys/girls) with "Primary (1–5) · 1,520 Boys 801 · Girls 719 · RTE 228"; "RTE share by stage" (Early years 20.0%, Primary 15.0%, Middle 13.1%, Secondary 7.0%, Senior 3.5%; phone: "On RTE seats 498 of 4,120 · 12.1%"); button **Download (UDISE+)** (desktop) / **Full report ›** (phone). **Teachers** ("PRT, TGT and PGT · 193 in post · 2 vacant"): PRT Classes 1–5 72, TGT Classes 6–10 74, PGT Classes 11–12 38, Activities and special ed. 9; a subject table (e.g. Maths 12 TGT, 6 PGT, "2 PGT vacant"; Sanskrit 0 PGT); desktop adds Students per teacher (PRT 21.1, TGT 21.1, PGT 16.3) and Average experience (7.4, 9.2, 12.6 yrs). Ready-made reports, each with **Download** and **Email**: Attendance register; Absence watch list; Fee collection and dues; Defaulters with accounts notes; Unit test and term results; Enrolment, gender and RTE (for UDISE+); Teacher strength: PRT, TGT, PGT; Staff leave register. Formats Excel or PDF.
- Functions: Download -> toast e.g. "Enrolment, gender and RTE downloaded for UDISE+ (Excel)", "Teacher strength downloaded (Excel)", or "<report> downloaded as <format>". Email opens the same options as the owner: format, recipients, once or every week/month; toasts "<report> emailed", "Scheduled · first email Mon 12 Oct, 8 am", "Stopped · <report>". Desktop also lists scheduled emails with **Stop**.
- Rules: figures come from the student register, staff records, class registers and the fee ledger ("Built from the same records as the rest of the app").

Calendar (Desktop: "Calendar" · Phone: "Calendar")

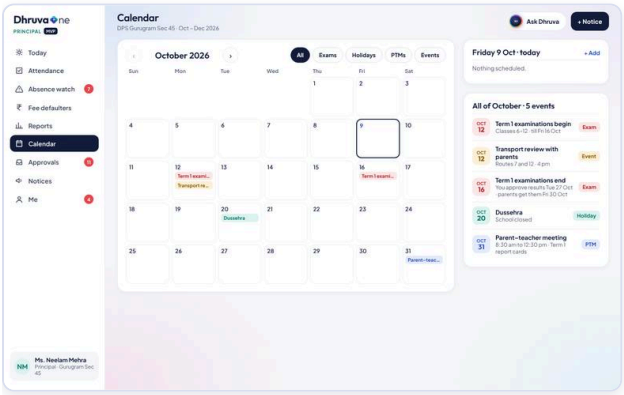

Desktop · Calendar

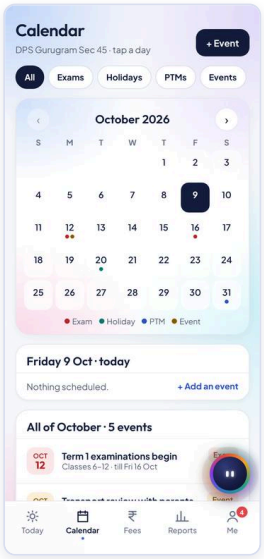

Phone · Calendar

- What it shows: "Calendar · DPS Gurugram Sec 45 · Oct – Dec 2026". Month grid, filter chips All / Exams / Holidays / PTMs / Events, today panel ("Friday 9 Oct · today · Nothing scheduled.") and "All of October · 5 events": 12 Oct Term 1 examinations begin (Classes 6–12, till Fri 16 Oct); 12 Oct Transport review with parents (Routes 7 and 12, 4 pm); 16 Oct Term 1 examinations end ("You approve results Tue 27 Oct · parents get them Fri 30 Oct"); 20 Oct Dussehra (school closed); 31 Oct Parent-teacher meeting (8:30 am to 12:30 pm, Term 1 report cards).

- Functions: month arrows; type filter chips; **+ Add** (desktop) / **+ Event** (phone). The add dialog "Add an event" has Event name ("e.g. Science exhibition"), Type (Exam, Holiday, PTM, Event), Date (a short list of dates), a toggle to tell parents and staff, **Cancel**, **Add event**. Toast "Added to the calendar" (plus " · parents and staff told" if the toggle is on).
- Rules: unlike the owner, the principal can add events for the campus ("principals add events").

Approvals (Desktop: "Approvals", badge 11 · Phone: Today > "Approvals")

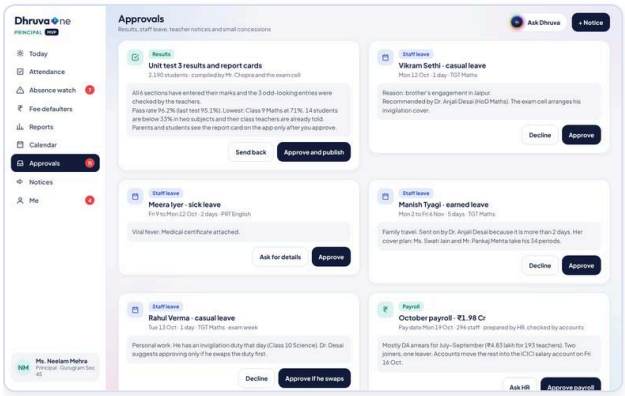

Desktop · Approvals

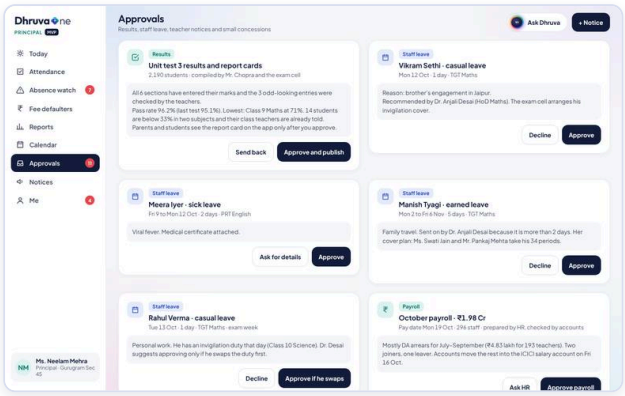

Desktop · Approvals

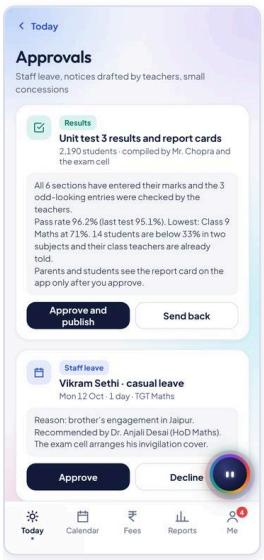

Phone · Approvals

- What it shows: "Approvals · Results, staff leave, teacher notices and small concessions" (phone: "Staff leave, notices drafted by teachers, small concessions"). Eleven cards, each with a kind chip, title, who and when, reason or note, and two buttons:
- **Results** "Unit test 3 results and report cards" (2,190 students, compiled by Mr. Chopra and the exam cell): "All 6 sections have entered their marks and the 3 odd-looking entries were checked by the teachers. Pass rate 96.2% (last test 95.1%). Lowest: Class 9 Maths at 71%. 14 students are below 33% in two subjects... Parents and students see the report card on the app only after you approve." Buttons **Send back / Approve and publish** (result: "2,190 report cards approved · parents and students are told on the app").
- **Staff leave** (4 cards): Vikram Sethi casual, Mon 12 Oct, TGT Maths, recommended by Dr. Anjali Desai (HoD Maths), exam cell arranges invigilation cover (**Decline / Approve**: "Approved · exam cell told about invigilation"); Meera Iyer sick Fri 9 to Mon 12 Oct, PRT English, medical certificate attached (**Ask for details / Approve**: "Approved · Meera Iyer notified"); Manish Tyagi earned leave, 2 to 6 Nov, 5 days, TGT Maths, "Sent on by Dr. Anjali Desai because it is more than 2 days" with a cover plan covering his 34 periods (**Decline / Approve**: "Approved · Dr. Desai and Mrs. Sinha told; cover plan goes to the timetable"); Rahul Verma casual, Tue 13 Oct, exam week, has an invigilation duty (Class 10 Science), Dr. Desai suggests approving only if he swaps first (**Decline / Approve if he swaps**: "Approved on condition · exam cell told to swap his duty").
- **Payroll** "October payroll · Rs 1.98 Cr" (pay date Mon 19 Oct, 296 staff, prepared by HR, checked by accounts; mostly DA arrears for Jul-Sep Rs 4.83 lakh for 193 teachers; two joiners, one leaver; accounts move the rest into the ICICI salary account on Fri 16 Oct): **Ask HR / Approve payroll** ("Payroll approved · HR and accounts told · payslips go out on 19 Oct").
- **Safety** (3 cards, information plus acknowledgement): Bus 14 broke down at Ambience Mall (7:14 am, 22 children, spare Bus 25 reached them at 7:31 am; 38 families told) with **Call transport / Noted** ("Noted · in today's safety log"); Gate 2 unknown man waiting 40 minutes (reported by Mrs. Usha Tiwari; guard checked; no child involved) with **Call security / Noted** ("Noted · security will update you"); Early pickup stopped, Kiara Kapoor 3–B (uncle not on the authorised list; guard held her at the gate and called her mother) with **Call the parent / Noted**.

- **Notice to approve** "Annual Day rehearsal schedule": drafted by Kavita Rao to parents of Classes 2–8. **Send back** / **Approve and send** ("Sent to 1,980 parents on the app and WhatsApp").
- **Concession** "Sibling discount · Kiara Kapoor, 3–B": 10% of tuition, Rs 9,600 for the year; brother Vihaan in 6–A; raised by Priya Nair, accounts. **Decline** / **Approve** ("Approved · fee ledger updated").
- Interactions: a decided card turns into a ticked/crossed line with the result message; the "Approvals" badge and the Today queue count drop. Decline shows "<label> · note sent".
- Rules: teacher notices to parents are held for principal approval by default (setting "You approve first"); leave over 2 days reaches the principal after the HoD/vice principal; concessions above Rs 25,000 are not here (they go to the group owner).

Notices (Desktop: "Notices" · Phone: Today > "Notices")

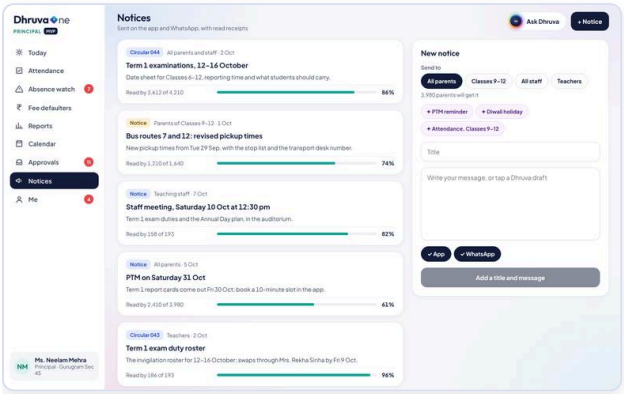

Desktop · Notices

- What it shows: "Notices · Sent on the app and WhatsApp, with read receipts". History: Circular 044 "Term 1 examinations, 12–16 October" (All parents and staff, 2 Oct, read 3,612 of 4,210, 86%); "Bus routes 7 and 12: revised pickup times" (Parents of Classes 9–12, 1 Oct, 1,210 of 1,640, 74%); "Staff meeting, Saturday 10 Oct at 12:30 pm" (Teaching staff, 158 of 193, 82%); "PTM on Saturday 31 Oct" (All parents, 2,410 of 3,980, 61%); Circular 043 "Term 1 exam duty roster" (Teachers, 186 of 193, 96%); "Block B water cooler under repair till Thursday" (All staff, 252 of 296, 85%).
- Functions: compose ("New notice"): "Send to" chips All parents / Classes 9–12 / All staff / Teachers and a count line ("3,980 parents will get it"); "Draft with Dhruva" chips "PTM reminder", "Diwali holiday", "Attendance, Classes 9–12" (toast "Dhruva drafted it · edit before sending"); title and message fields; channel chips App and WhatsApp (both on); **Send** (reads "Add a title and message" until filled). Toast "Sent on the app and WhatsApp".
- Rules: circulars are numbered; read receipts shown as "Read by n of N · %".

Me (Desktop: "Me", badge 4 · Phone: "Me")

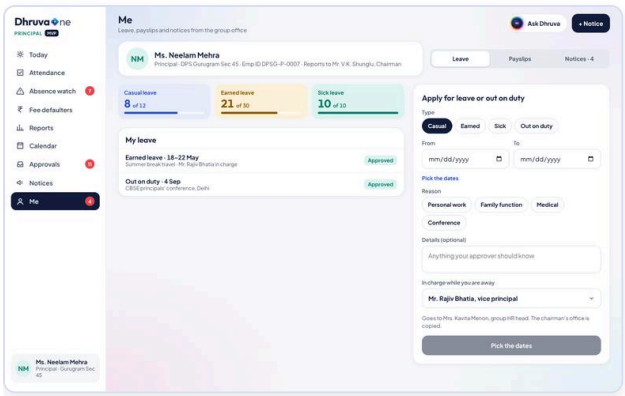

Desktop · Me

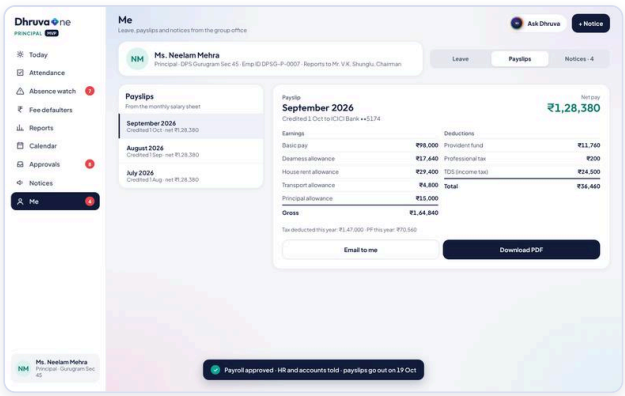

Desktop · Me payslip

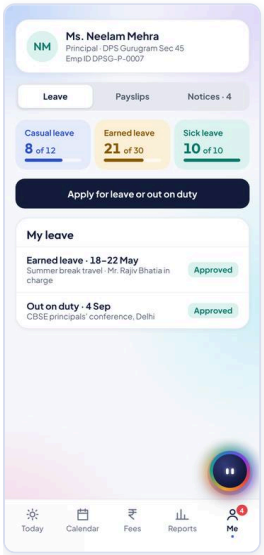

Phone · Me

- What it shows: "Me · Leave, payslips and notices from the group office". Profile: Ms. Neelam Mehra, Principal, DPS Gurugram Sec 45, Emp ID DPSG-P-0007, "Reports to Mr. V.K. Shunglu, Chairman". Tabs **Leave | Payslips | Notices · 4**. Leave balances: Casual 8 of 12, Earned 21 of 30, Sick 10 of 10. "My leave" history (Earned leave 18–22 May with Mr. Rajiv Bhatia in charge, Approved; Out on duty 4 Sep, CBSE principals' conference, Approved).
- Functions: **Apply for leave or out on duty**: Type (Casual, Earned, Sick, Out on duty), From, To (date pickers, "Pick the dates"), Reason chips (Personal work, Family function, Medical, Conference), Details (optional), "In charge while you are away" (Mr. Rajiv Bhatia, vice principal; Mrs. Rekha Sinha, academic coordinator; Dr. Anjali Desai, HoD Maths). Routing line: "Goes to Mrs. Kavita Menon, group HR head. The chairman's office is copied." and for more than 3 days "Goes to Mrs. Kavita Menon, then Mr. Shunglu, because it is more than 3 days." Toasts: "Sent to Mrs. Kavita Menon · <name> will be in charge" or "Your leave is approved by Mrs. Kavita Menon" / "Out on duty approved by...". Payslips: list for September, August, July 2026 ("Credited 1 Oct · net Rs 1,28,380") that opens a payslip (Net pay; earnings Basic Rs 98,000, DA Rs 17,640, HRA Rs 29,400, Transport Rs 4,800, Principal allowance Rs 15,000, Gross Rs 1,64,840; deductions PF Rs 11,760, Professional tax Rs 200, TDS Rs 24,500, total Rs 36,460; "Tax deducted this year", "PF this year"; salary credited to "ICICI Bank ••5174"), with **Email to me** ("Payslip emailed to <address>") and **Download PDF** ("September payslip downloaded"). Notices: group notices from the chairman's office.
- Rules: payslips come from "the monthly salary sheet" (phone note: "Payslips come from the payroll HR runs in DhruvaOne, approved by the principal").

Setup journey: welcome, nine steps and finish (the desktop app: Desktop; phone not provided)

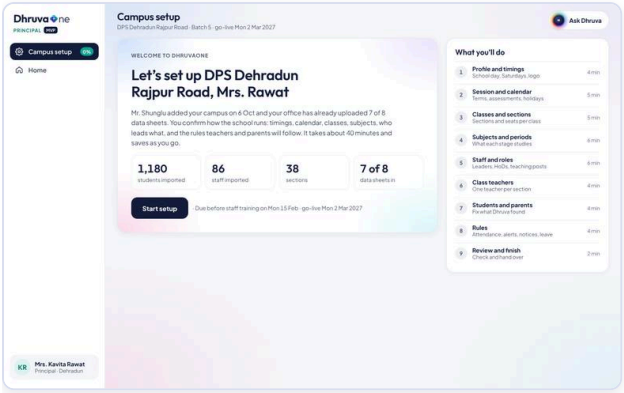

Desktop · Campus setup

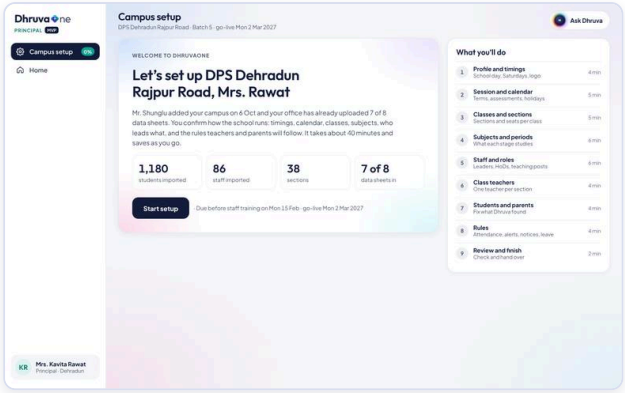

Desktop · Start

Persona: Mrs. Kavita Rawat, DPS Dehradun Rajpur Road, Batch 5, go-live Mon 2 Mar 2027. Sidebar shows only "Campus setup 0%" and "Home".

- **Welcome** ("WELCOME TO DHRUVAONE · Let's set up DPS Dehradun Rajpur Road, Mrs. Rawat"): "Mr. Shunglu added your campus on 6 Oct and your office has already uploaded 7 of 8 data sheets. You confirm how the school runs... It takes about 40 minutes and saves as you go." Tiles: 1,180 students imported, 86 staff imported, 38 sections, 7 of 8 data sheets in. **Start setup**; "Due before staff training on Mon 15 Feb · go-live Mon 2 Mar 2027". "What you'll do" lists nine steps with times: 1 Profile and timings 4 min; 2 Session and calendar 5; 3 Classes and sections 5; 4 Subjects and periods 6; 5 Staff and roles 6; 6 Class teachers 4; 7 Students and parents 4; 8 Rules 4; 9 Review and finish 2.
- **Frame:** left rail of nine steps with status (In progress, Done, Needs attention) and "Setup complete n%" bar; centre form; right Dhruva panel with step tips and "NEED A HAND?" (Mr. Sandeep Negi, onboarding lead: **Message** -> "Message sent to Mr. Sandeep Negi"/"Sent to Mr. Sandeep Negi"; Ms. Riya Kapoor: call -> "Call booked with Ms. Riya Kapoor · Tue 13 Oct, 4 pm"). Bottom: **Back**, a blocker line when something is open, and **Save and continue** (or **Continue anyway** when the step still has an issue). A save-and-leave toast "Saved · pick up where you left off" exists.
- **Step 1 Profile and timings:** locked group-entered facts (Campus, Board "CBSE · aff. 3530418", Classes "Nursery to Class 10", "Added by Mr. V.K. Shunglu · 6 Oct"); choices: School starts 7:40 / 7:50 / 8:00 am; School ends 1:30 / 2:20 / 2:40 pm; Periods a day 7 / 8 / 9; Period length 35 / 40 / 45 min; Saturdays All off / 2nd and 4th working / All working. A live strip shows "Your school day · 7:50 am to 2:20 pm · 6 h 30 min" with periods, Lunch and "Fits: 8 periods, assembly, a short break and lunch, with 10 minutes to spare." Optional **Upload logo** ("Logo uploaded"; PNG or SVG at least 400 px). Dhruva: "Most DPS campuses start at 7:50 am with 8 periods of 40 minutes... Bus pickup times will be worked out from your start time."
- **Step 2 Session and calendar:** Terms (Two terms / One session-long term); assessments (Periodic test 1, Half-yearly [locked], Periodic test 2, Periodic test 3, Annual [locked]; tapping a locked one toasts "Half-yearly and annual exams are required by CBSE"); a clash alert "Holi and Periodic test 3 fall on the same day" with **Move PT 3 to Mon 16 Mar** (toast "Periodic test 3 moved to Mon 16 Mar") or **Keep both**; "From your calendar sheet · 31 events" by month (2 Mar DhruvaOne go-live, 14 Mar Holi, 14 Mar PT 3, 21–31 Mar Annual examinations); tick "I've checked the calendar and it looks right". Until the clash is resolved and the box ticked the button says "Continue anyway" with line "Resolve the clash and confirm the calendar". Dhruva: "I compared your sheet with the CBSE circular for 2026–27. Only one clash... parents see it once invites go out on 22 Feb."
- **Step 3 Classes and sections:** "Seats per section" 35 / 40 (CBSE norm) / 45; table Class, Sections (– n + with letters), Seats, Enrolled, Fill, e.g. Nursery 2 sections A B, 80 seats, 60, 75% full; Class 2 shows "126 enrolled, 6 over · add a section or raise seats". Summary "38 sections · 1,520 seats · 1,180 enrolled". Blocker "Some classes have more students than seats".
- **Step 4 Subjects and periods:** stage tabs Primary / Middle / Secondary with tick or "!"; core subjects locked (English 6/wk, Hindi 5, Third language 4, Mathematics 7, Science 7, Social science 6) and optional ones that can be switched off (Computer 2, Physical education 2, Art 1, Library 1, Music 1); an alert "Middle · Classes 6–8 · 42 of 40 periods a week · 2 periods too many · turn an optional subject off"; third language choice Sanskrit / French / Punjabi for Classes 6–8. Dhruva: "Most campuses drop Music and Library to activity periods for Class..."
- **Step 5 Staff and roles:** "86 staff came in from your staff sheet. Choose who leads, and tag the four teachers whose post wasn't clear." Dropdowns for School leadership: Vice principal*, Academic coordinator*, Exam in-charge and more (list of teachers with subject and years of experience, e.g. "Mrs. Anita Joshi · TGT English · 18 yrs") and four teachers to tag as PRT/TGT/PGT.
- **Step 6 Class teachers:** "Dhruva matched 32 of 38 sections to the teacher with the most periods in that class. Pick class teachers for the other six." Banner "6 of 38 sections still need a class teacher · free teachers are listed first"; **Fill with Dhruva's suggestions** (toast "Filled 6 sections · check and change any"); per-section dropdowns with reason (1–D "Ms. Ritika Sharma teaches 9 periods here"; 3–D "New section · 28 students"; 6–C "Previous class teacher left in June"; 8–B "Two teachers tie at 7 periods") and a "suggested" marker.
- **Step 7 Students and parents:** tiles 1,180 students, 2,264 parent contacts, 41 on RTE seats, 48% girls. Three issues: "6 students have no parent mobile number" (Aarav Bisht 2–B, Sneha Rana 4–A and 4 more) with **Ask class teachers** (toast "Task sent to 5 class teachers") or **Office will fix**; "3 possible duplicate students" (same name, date of birth and parent phone; Riya Joshi 5–A and 5–C) with **Merge all 3** ("Merged 3 duplicate records") or **They're different**; "Confirm 41 students on RTE seats" (flagged

EWS/DG under Section 12(1)(c); tuition waived in the fee module) with **Confirm** ("41 RTE students confirmed"; text becomes "They count toward UDISE+ returns and are excluded from fee reminders") or **Review list** ("RTE list downloaded for review"). Roll numbers: Alphabetical / By admission number / Keep from sheet.

- **Step 8 Rules:** Attendance (Teachers mark by 9:00 / 9:30 / 10:00 am; Late after 8:00 / 8:10 / 8:15 am; Tell parents a child is absent "As soon as marked" or "At 9:30 am"); Absence watch (Flag students below 90% / 85% / 75%; or absent at least 3+ / 5+ / 8+ days in 30; note "CBSE requires 75% to sit board exams; flagging at 85% gives class teachers time to act"); Notices (Teachers' notices to parents: "You approve first" / "Send directly"; Languages English / Hindi / Both); Staff leave Who approves ("Vice principal, then you over 2 days" / "Always you"; "HoDs approve short leave first; the academic coordinator arranges cover"). Dhruva: "These are DPS Group defaults... You can change any rule later from Settings."
- **Step 9 Review and finish:** summary cards with **Edit**, "Still to do:" list; button **Finish setup** only when everything is complete, else "Go to step n". Finish toasts "Setup finished · group office notified" and shows "Your campus is set up": "Mr. Shunglu and the group office have been told DPS Dehradun is ready." Four next-steps: Today "Staff logins created" (64 teachers and 22 staff get an SMS invite; class teachers see their sections; Done); 15 Feb "Staff training" (teachers 45 min, accounts 2 hours, booked by Mr. Sandeep Negi; Booked); 22 Feb "Parent invites" (2,264 parents get the app link on WhatsApp in English and Hindi; Scheduled); 2 Mar "Go-live" (Batch 5). Buttons **Review setup again**, **Go to my home page**.
- **Pre-go-live Home:** "Good morning, Mrs. Rawat · Friday 9 Oct 2026"; "144 days to go-live · Mon 2 Mar 2027"; "Your campus's road to go-live" (Campus setup In progress 0% due 15 Feb; Staff training Booked; Parent invites 2,264 parents Scheduled; Go-live Batch 5 with Bengaluru); "Waiting on others · Onboarding lead: Mr. Sandeep Negi" (Monthly salary sheet Pending; Fee structure, Mrs. Pooja Bisht, Done; Transport routes 9 routes, 74 stops, 412 riders, Done); "After go-live, this page shows" attendance chart, absence watch, fee defaulters, approvals, notices, calendar and reports.
- Rules & edge cases: group-entered fields are locked ((locked)) for the principal; "Continue anyway" lets a principal go forward past an unresolved issue but Finish is blocked until every step is clear; the steps remember progress ("saves as you go").

Gaps / differences between desktop and phone

- Desktop has separate sidebar items Attendance, Absence watch, Approvals, Notices; the phone folds them into Today cards and pushed pages and keeps only Today, Calendar, Fees, Reports, Me as tabs.
- Phone Fees uses a sheet for family notes; desktop uses a right drawer. Phone has "Full report ›" links in Reports.
- Desktop Reports has more panels (Students per teacher, Average experience, RTE share chart, scheduled email list); phone shows RTE as one line.
- The setup journey exists only on desktop in the supplied boards.
- Desktop top bar offers Ask Dhruva and + Notice; phone uses the orb.

LEADERSHIP AND ADMINISTRATION · DESKTOP · PHONE

Standalone School Admin

A single person runs the whole school day from one page: attendance and cover, leave, fee reminders, salary, admissions enquiries, parent notices, timetable and exams, with the trustee seeing only what concerns the admin's own pay and refunds.

Who uses it. Mrs. Meena Sharma, School Admin of Saraswati Vidya Niketan, Karnal (sample: 502 students, 30 staff, one school, no group). Her own leave, salary and any fee waiver are approved by the trustee, Mr. R. K. Gupta, chairperson.

On the following pages:

- Today (Desktop: "Today", badge 8 · Phone: "Today")
- People (Desktop: "People", badge 5 · Phone: "People")
- Money (Desktop: "Money", badge 3 · Phone: "Money")
- Admissions (Desktop: "Admissions", badge 4 · Phone: "Intake", badge 4)
- School (Desktop: "School", badge 2 · Phone: "School")
- Me (Desktop: "Me", badge 3 · Phone: tap the avatar "MS" top-left, badge 3)

Business summary

A small standalone school has no principal, accountant and group office to hand work to, so one admin carries everything. DhruvaOne gives her a short "what needs me today" list (eight things on the sample morning) and does the finding and drafting for her: it works out which free teachers can cover an absent teacher, reminds the classes that have not marked attendance, sends polite fee reminders to all late families in one tap, prepares the monthly salary changes for confirmation, lines up enquiries for the next step in admissions, and keeps parent notices ready to send. There is no group above her ("You run the school. No group sits above you."); the only oversight is the chairperson, who approves her own leave, her own salary and any fee waiver, and can read the payroll and refund log but nothing else. That keeps control with the trustee without slowing daily work.

Daily story

Friday 9 Oct 2026, 9:12 am on desktop (phone shows "Friday 9 Oct · 502 students · 30 staff"). "Good morning, Mrs. Sharma · Saraswati Vidya Niketan, Karnal". Header "8 THINGS NEED YOU · 1 OF 8" with one card at a time and a "Later ›" button. The eight, in order:

1. **2 classes have not marked attendance** (Class 4–A and Class 8–B, "the first period ended 40 minutes ago") -> **Remind teachers**. Toast "Reminder sent to the Class 4–A and 8–B teachers"; the item turns into "Attendance reminders sent · Class 4–A and 8–B teachers were reminded · Done" and the counter becomes "7 THINGS NEED YOU".
2. **Cover needed for 11 periods today** (Mr. Anil Kumar 6 periods and Ms. Rekha Yadav 5 periods are absent; "Dhruva found free teachers") -> **Assign with Dhruva**. Toast "Cover assigned for 11 periods · teachers told on their phones".
3. **3 leave requests waiting** ("Dhruva checked who is free to cover each one") -> **Review** (goes to People > Leave).
4. **94 families have fees overdue** (Rs 4.82 lakh; "71% of October fees are in · the rest are 1 to 3 months late") -> **Send reminders** (toast "Reminder sent to 94 families on WhatsApp and SMS").
5. **October salary: 3 changes to confirm** (salary day Fri 30 Oct; unpaid leave, a new joiner and an advance) -> **Review** (goes to Money > Salary).
6. **4 new enquiries not called back** (the oldest came in Wed 7 Oct) -> **Review** (goes to Admissions).
7. **2 notices are still drafts** (Diwali break dates and the PTM on Sat 17 Oct) -> **Open notices** (goes to School > Notices).
8. **Exam duty roster has 3 gaps** (Term 1 starts Mon 12 Oct; "Dhruva can fill them fairly") -> **Fill the gaps** (toast "3 duties filled · teachers told"). "See all 8 for today · n done" expands to the whole list with a "Hide the full list" link (desktop and phone). Below: the "School today" tiles (Students present 93%, "468 of 502 · 2 classes not marked yet"; Teachers present 27 of 30, "2 need cover today"; October fees in Rs 11.58 lakh of Rs 16.4 lakh, 71%; New enquiries 4, "seats left in 4 classes"), "Coming up" (Sat 10 Oct Open house for new parents 11 am; Mon 12 Oct Term 1 exams start; Sat 17 Oct Mr. Gupta's monthly review and PTM; Fri 30 Oct Salary day; 7 to 11 Nov Diwali break) and a card "Who approves what".

Screens

Today (Desktop: "Today", badge 8 · Phone: "Today")

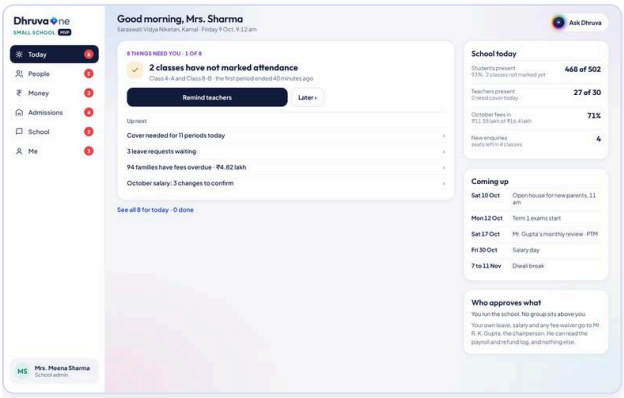

Desktop · Today

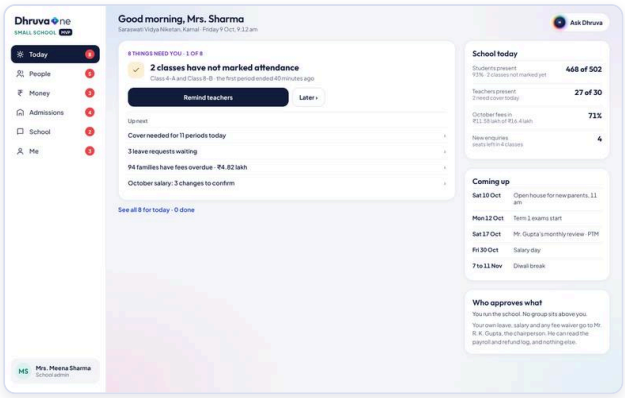

Desktop · Start

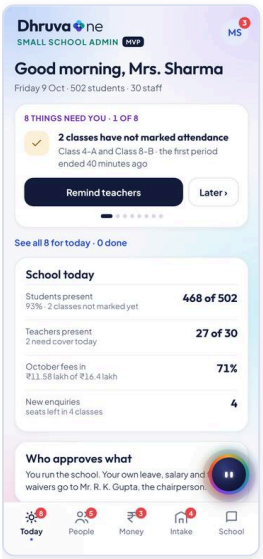

Phone · Today

- What it shows: as in the Daily story. Sidebar badges on desktop: Today 8, People 5, Money 3, Admissions 4, School 2, Me 3 (these count open items and drop as work is done). Phone bottom tabs: Today 8, People 5, Money 3, Intake 4, School; the avatar "MS" with badge 3 at top-left opens Me.
- Functions: **Later ›** (next card), the action button on each card (listed above), "Up next" rows (desktop: the next four card titles with ">" to jump), **See all 8 for today / Hide the full list**, **Ask Dhruva** (desktop top bar; orb on phone). Each action either performs the work and marks the card done, or opens the relevant tab.
- Interactions: acting on a card removes it from the queue, adds a "Done" line in the full list and decreases the badge counts (for example after **Remind teachers** the queue shows 7 and "1 done"; after **Assign** it shows 6 and "2 done").
- Dhruva help on this screen: Dhruva produces the ranking and the explanation in each card ("Dhruva found free teachers", "Dhruva checked who is free to cover each one", "Dhruva can fill them fairly"). Ask Dhruva panel suggests three questions: "Who is absent today?" (three teachers: Mr. Anil Kumar sick 6 periods, Ms. Rekha Yadav sick 5 periods, Ms. Pooja Rani casual leave already covered; free to cover: Ms. Seema Rani, Mr. Vikas Tomar, Mr. Naveen Kumar); "How are fees this month?" (71% in, Rs 11.58 lakh of Rs 16.4 lakh; 94 families late, 6 of them by 3 months); "How many seats are left?" (Nursery 8, Class 1 four, Class 6 two, Class 9 one; four enquiries not called back). Each answer shows two figures (e.g. "27 of 30 teachers in", "11 periods to cover").
- Rules & edge cases: "Who approves what: You run the school. No group sits above you. Your own leave, salary and any fee waiver go to Mr. R. K. Gupta, the chairperson. He can read the payroll and refund log, and nothing else." (phone: "Your own leave, salary and fee waivers go to Mr. R. K. Gupta, the chairperson.") This is shown on Today so the admin knows what she can and cannot decide.

People (Desktop: "People", badge 5 · Phone: "People")

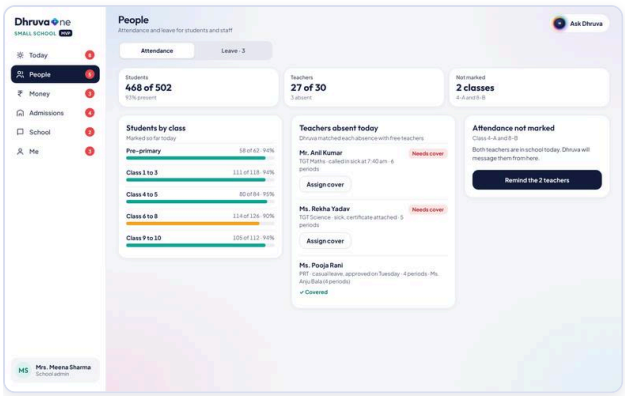

Desktop · People

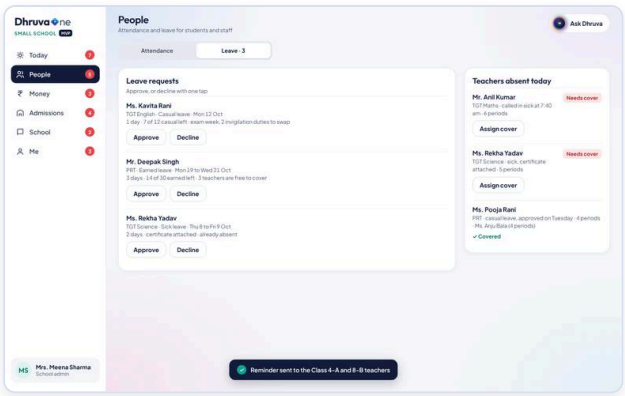

Desktop · People leave

Phone · People

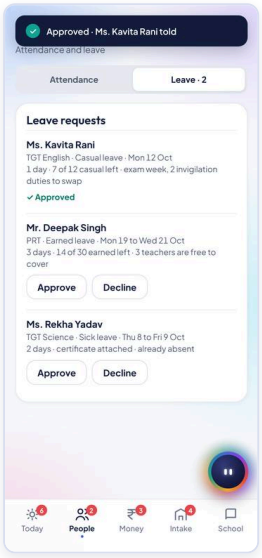

Phone · Leave approved

- What it shows: "People · Attendance and leave for students and staff" with two sub-tabs **Attendance** and **Leave · 3**.
- Attendance: tiles Students 468 of 502 (93% present), Teachers 27 of 30 (3 absent), Not marked 2 classes (4–A and 8–B). "Students by class · Marked so far today": Pre-primary 58 of 62 (94%); Class 1 to 3 111 of 118 (94%); Class 4 to 5 80 of 84 (95%); Class 6 to 8 114 of 126 (90%); Class 9 to 10 105 of 112 (94%). "Teachers absent today · Dhruva matched each absence with free teachers": Mr. Anil Kumar (TGT Maths, called in sick at 7:40 am, 6 periods; **Assign cover**), Ms. Rekha Yadav (TGT Science, sick, certificate attached, 5 periods; **Assign cover**), Ms. Pooja Rani (PRT, casual leave approved on Tuesday, 4 periods, covered by Ms. Anju Bala; shown "Covered"). "Attendance not marked · Class 4–A and 8–B · Both teachers are in school today. Dhruva will message them from here." -> **Remind the 2 teachers**.
- Leave: "Leave requests · Approve, or decline with one tap": Ms. Kavita Rani (TGT English, casual, Mon 12 Oct, 1 day, 7 of 12 casual left, exam week, 2 invigilation duties to swap); Mr. Deepak Singh (PRT, earned, Mon 19 to Wed 21 Oct, 3 days, 14 of 30 earned left, 3 teachers free to cover); Ms. Rekha Yadav (TGT Science, sick, Thu 8 to Fri 9 Oct, certificate attached, already absent). Each has **Approve** and **Decline**.
- Functions and toasts: **Assign cover** (per teacher) -> "Cover assigned: <details>" or "Ms. Sonia Kapoor and Mr. Vivek Batra assigned · told on the app" style message (phone: assigns and shows on School > Timetable "Today's changes": Mr. Anil Kumar 6 periods covered by Ms. Seema Rani (4) and Mr. Vikas Tomar (2); Ms. Rekha Yadav 5 periods by Mr. Naveen Kumar; Ms. Pooja Rani 4 periods by Ms. Anju Bala). **Remind the 2 teachers** -> "Reminder sent to the Class 4–A and 8–B teachers". **Approve** -> "Approved · <name> told" and the row shows "Approved"; **Decline** -> "Declined · <name> told". The Leave count and tab badge drop (3 to 2 after one approval).
- Interactions: no confirmation dialogs; undo is not shown.
- Dhruva help: free-teacher matching ("Dhruva matched each absence with free teachers"), cover suggestion, leave context (balance left, how many are free).
- Rules & edge cases: leave rows show remaining balance and clash information (invigilation duty to swap). Sick leave already taken is shown as "already absent".

Money (Desktop: "Money", badge 3 · Phone: "Money")

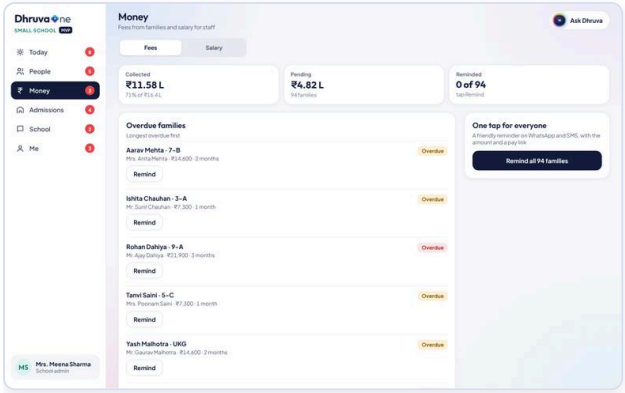

Desktop · Money

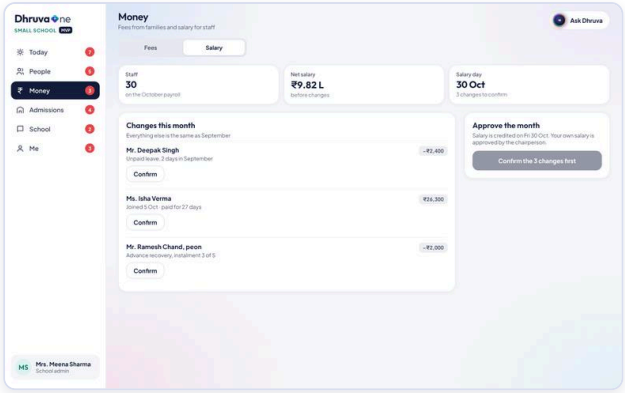

Desktop · Money salary

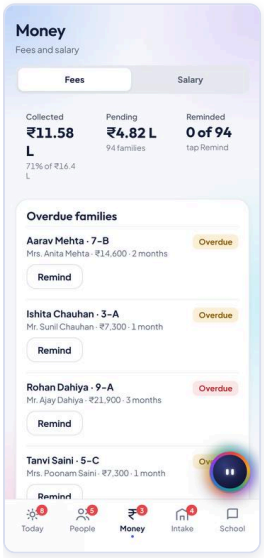

Phone · Money

- What it shows: "Money · Fees from families and salary for staff" with sub-tabs **Fees** and **Salary**.
- Fees: Collected Rs 11.58 L (71% of Rs 16.4 L); Pending Rs 4.82 L (94 families); Reminded "0 of 94 · tap Remind". "Overdue families · Longest overdue first": Aarav Mehta 7–B, Mrs. Anita Mehta, Rs 14,600, 2 months; Ishita Chauhan 3–A, Mr. Sunil Chauhan, Rs 7,300, 1 month; Rohan Dahiya 9–A, Mr. Ajay Dahiya, Rs 21,900, 3 months; Tanvi Saini 5–C, Rs 7,300; Yash Malhotra UKG, Rs 14,600; Simran Kaur 10–B, Mr. Harjit Singh, Rs 21,900, 3 months; "88 more families are overdue". Each has an "Overdue" chip and **Remind**. A card "One tap for everyone · A friendly reminder on WhatsApp and SMS, with the amount and a pay link" with **Remind all 94 families**.
- Salary: Staff 30 on the October payroll; Net salary Rs 9.82 L "before changes"; Salary day 30 Oct; "3 changes to confirm". "Changes this month · Everything else is the same as September": Mr. Deepak Singh unpaid leave, 2 days in September, -Rs 2,400; Ms. Isha Verma joined 5 Oct, paid for 27 days, Rs 26,300; Mr. Ramesh Chand, peon, advance recovery, instalment 3 of 5, -Rs 2,000; each with **Confirm** ("Confirmed"). "Approve the month · Salary is credited on Fri 30 Oct. Your own salary is approved by the chairperson." with a button that reads "Confirm the 3 changes first" until all three are confirmed, then approves the payroll.
- Functions and toasts: **Remind** -> "Reminder sent to Mrs. Anita Mehta", row becomes "Reminded" and "Reminded 1 of 94"; **Remind all 94 families** / Today's "Send reminders" -> "Reminder sent to 94 families on WhatsApp and SMS"; **Confirm** per salary change; approving salary -> "October salary approved · Mr. R. K. Gupta can see the payroll log"; pressing approve early -> "Confirm the 3 changes first".
- Rules & edge cases: the chairperson can read the payroll and refund log. The admin's own salary is not in her approval list. Salary day is Fri 30 Oct (the group board had 19 Oct, a different school).

Admissions (Desktop: "Admissions", badge 4 · Phone: "Intake", badge 4)

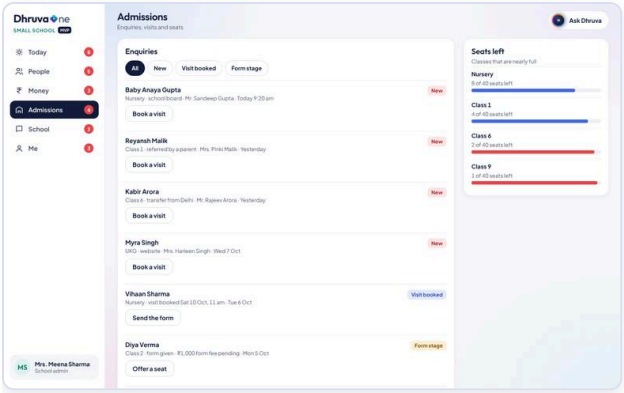

Desktop · Admissions

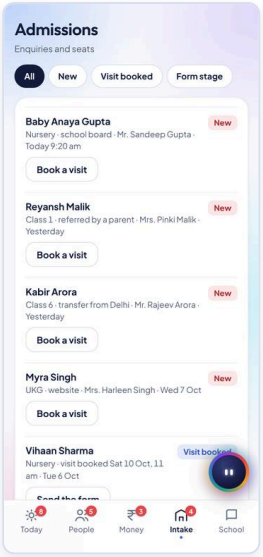

Phone · Intake

- What it shows: "Admissions · Enquiries, visits and seats". Filter chips **All / New / Visit booked / Form stage**. Enquiry rows: Baby Anaya Gupta (Nursery, school board, Mr. Sandeep Gupta, Today 9:20 am, New); Reyansh Malik (Class 1, referred by a parent, Mrs. Pinki Malik, Yesterday, New); Kabir Arora (Class 6, transfer from Delhi, Mr. Rajeev Arora, New); Myra Singh (UKG, website, Mrs. Harleen Singh, Wed 7 Oct, New); Vihaan Sharma (Nursery, visit booked Sat 10 Oct 11 am, Visit booked); Diya Verma (Class 2, form given, Rs 1,000 form fee pending, Form stage); Arjun Bhatia (Class 9, form returned, entry test on Monday, Form stage). "Seats left · Classes that are nearly full": Nursery 8 of 40, Class 1 4 of 40, Class 6 2 of 40, Class 9 1 of 40.
- Functions: each row has one next-step button that moves it along a fixed path: **Book a visit** (New) -> "Visit booked · message sent to the parent"; **Send the form** (Visit booked) -> "Form sent on WhatsApp"; **Offer a seat** (Form stage) -> "Seat offered · parent has 3 days to confirm" (chip "Seat offered"). Toast format "<Child name>: <message>". The "New" count and the badge drop as enquiries move on.
- Dhruva help: Ask Dhruva "How many seats are left?"; Today card "4 new enquiries not called back".
- Rules: stages are New, Visit booked, Form stage, Seat offered; seat counts are per class out of 40.

School (Desktop: "School", badge 2 · Phone: "School")

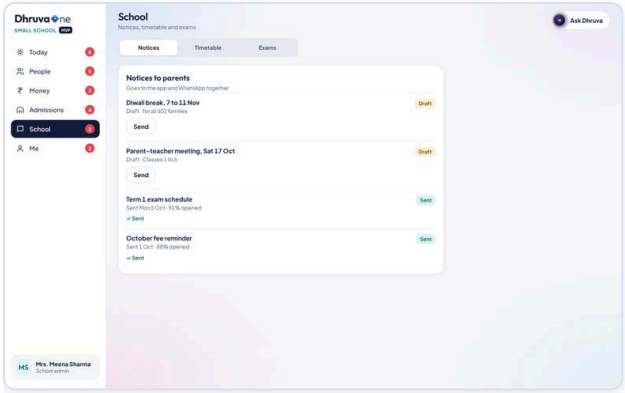

Desktop · School

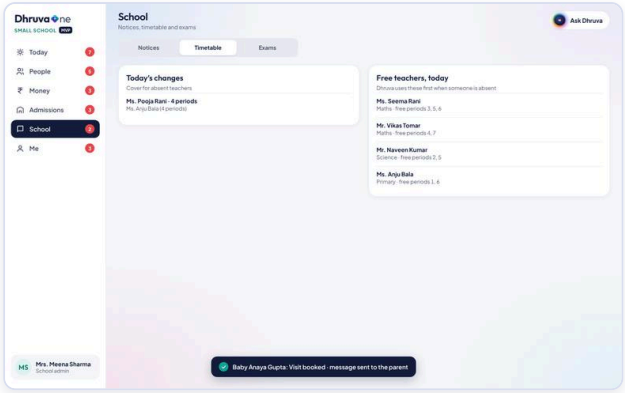

Desktop · School timetable

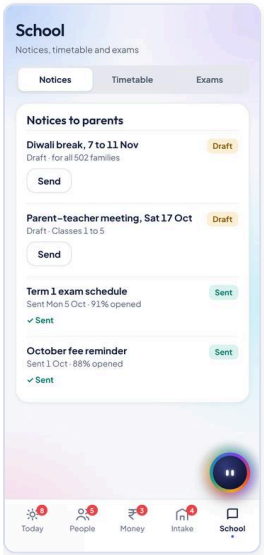

Phone · School

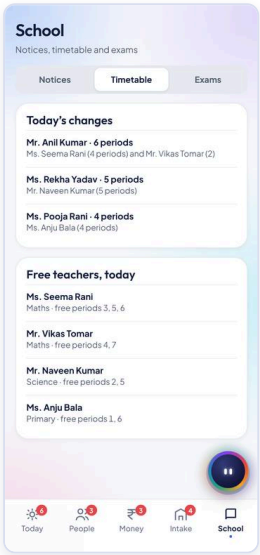

Phone · School timetable cover

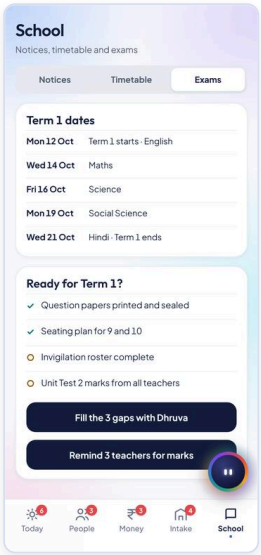

Phone · School exams

- What it shows: "School · Notices, timetable and exams" with sub-tabs **Notices | Timetable | Exams**.
- Notices ("Notices to parents · Goes to the app and WhatsApp together"): "Diwali break, 7 to 11 Nov" (Draft, for all 502 families), "Parent-teacher meeting, Sat 17 Oct" (Draft, Classes 1 to 5), "Term 1 exam schedule" (Sent Mon 5 Oct · 91% opened), "October fee reminder" (Sent 1 Oct · 88% opened). Drafts have **Send**; sending changes the row to "Sent just now to parents on the app and WhatsApp" with a tick and toast "'Diwali break, 7 to 11 Nov' sent to parents"; the School badge drops 2 -> 1.
- Timetable: "Today's changes · Cover for absent teachers" (Ms. Pooja Rani 4 periods covered by Ms. Anju Bala) and "Free teachers, today · Dhruva uses these first when someone is absent": Ms. Seema Rani (Maths, free periods 3, 5, 6), Mr. Vikas Tomar (Maths, 4, 7), Mr. Naveen Kumar (Science, 2, 5), Ms. Anju Bala (Primary, 1, 6). After cover is assigned the other rows appear (phone shows the split per teacher).
- Exams: "Term 1 dates": Mon 12 Oct Term 1 starts (English); Wed 14 Oct Maths; Fri 16 Oct Science; Mon 19 Oct Social Science; Wed 21 Oct Hindi, Term 1 ends. "Ready for Term 1?" checklist: Question papers printed and sealed (done); Seating plan for 9 and 10 (done on desktop; open on phone in the sample); Invigilation roster complete (open with a button **Fill the 3 gaps with Dhruva**); Unit Test 2 marks from all teachers (open, **Remind 3 teachers for marks** -> "Reminder sent to 3 teachers for Unit Test 2 marks"). After filling: "Roster complete" and toast "3 duties filled · teachers told".
- Rules & edge cases: Notices go to the app and WhatsApp together. Free-teacher lists drive cover. Only the items actually visible in the sample (notices, timetable cover, exam readiness) are described; the board's script also contains messages about papers, report cards and HoD reviews that are not reachable from the visible screens.

Me (Desktop: "Me", badge 3 · Phone: tap the avatar "MS" top-left, badge 3)

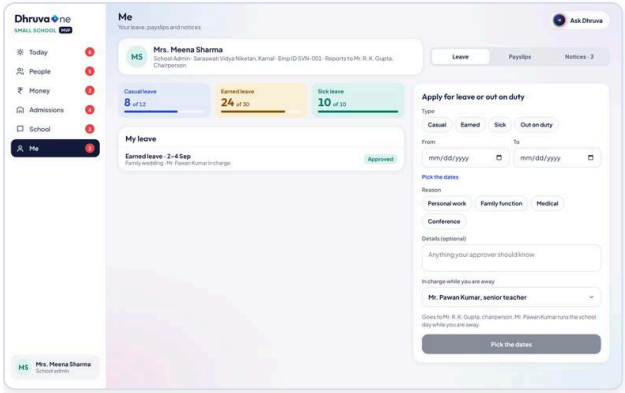

Desktop · Me

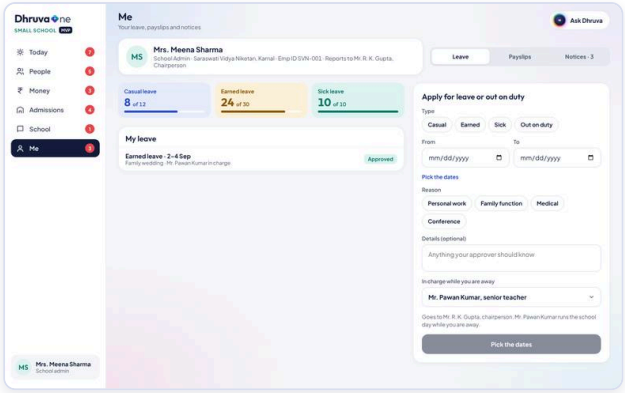

Desktop · Me leave form

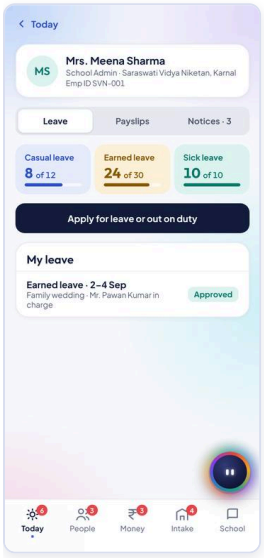

Phone · Me

- What it shows: "Me · Your leave, payslips and notices". Profile: Mrs. Meena Sharma, School Admin, Saraswati Vidya Niketan, Karnal, Emp ID SVN-001, "Reports to Mr. R. K. Gupta, Chairperson". Tabs **Leave | Payslips | Notices · 3**. Balances: Casual 8 of 12, Earned 24 of 30, Sick 10 of 10. "My leave": Earned leave 2–4 Sep (family wedding, Mr. Pawan Kumar in charge) Approved.
- Functions: **Apply for leave or out on duty**: Type (Casual, Earned, Sick, Out on duty), From, To ("Pick the dates"), Reason chips (Personal work, Family function, Medical, Conference), Details (optional), "In charge while you are away" (Mr. Pawan Kumar, senior teacher; Ms. Seema Rani, senior teacher). Routing line: "Goes to Mr. R. K. Gupta, chairperson. Mr. Pawan Kumar runs the school day while you are away." Toasts "Sent to Mr. R. K. Gupta, chairperson · <name> will be in charge" or "Your leave is approved by Mr. R. K. Gupta" / "Out on duty approved by...". Payslips: monthly list opening a payslip with earnings, deductions and net pay; buttons email to me ("Payslip emailed to <address> ") and Download PDF ("<month> payslip downloaded (PDF)"). Notices: notices addressed to the admin.
- Rules: the admin's leave goes to the chairperson, not to a group HR head (compare the principal).

Gaps / differences between desktop and phone

- Admissions is labelled "Intake" on phone; Me is a tab on desktop but an avatar button on phone; the phone Today screen omits the "Coming up" panel and shows a shorter "Who approves what" line.
- Desktop has a persistent "Ask Dhruva" button and a sidebar with badges; phone uses the orb and bottom tabs with badges.
- Phone School > Timetable lists the split of cover periods per teacher after assignment; desktop shows the cover row and the free-teacher list.

PART 2

Academics

Academic Coordinator

Head of Department

Exam Cell

School Counsellor

Teacher

ACADEMICS · DESKTOP · PHONE

Academic Coordinator

Keeps every period taught (cover for absent teachers), keeps the syllabus on pace, and builds, fixes and publishes the school timetable with Dhruva.

Who uses it. the academic coordinator of a campus (sample: Mrs. Rekha Sinha, Academic coordinator, DPS Gurugram Sec 45, Emp ID DPSG-T-0142, reports to Ms. Neelam Mehra, Principal).

On the following pages:

Today (Desktop: "Today" tab, badge 5 · Phone: "Today" tab, badge 5)

Cover (Desktop: "Cover" tab, badge 24 · Phone: "Cover" tab, badge 24)

Progress: Check-ins and plans (Desktop: "Progress" tab, sub-tab "Check-ins and plans" · Phone: "Progress" tab, sub-tab "Check-ins and plans")

Progress: Learning outcomes (Desktop: "Progress" > "Learning outcomes" · Phone: "Progress" > "Outcomes")

Timetable (Desktop: "Timetable" tab, badge AI/Draft/tick · Phone: "Timetable" tab) , the generator in detail

Parent queries (Desktop: "Parent queries" tab, badge 4 · Phone: reached from the Today "Parent queries" card, opens a "Reply" sheet)

Me (Desktop: "Me" tab, badge 7 · Phone: avatar "RS" top-right opens "Me: leave, payslips, notices")

Business summary

The academic coordinator is the person who makes sure that on any school day every class has a teacher, the syllabus is moving at the planned speed, and the weekly timetable is fair and clash-free. DhruvaOne gives this role one ordered list of what needs attention each morning, starting with the 24 periods that need a substitute because 7 teachers are away. Dhruva proposes a free teacher of the same subject with the fewest covers this week, so the coordinator checks instead of searches. Teachers' end-of-day "on plan / ahead / behind" taps and lesson-plan submissions are rolled up by department, so slippage is seen the same day, not at the exam. The biggest piece of work, a whole-school timetable (60 sections, 193 teachers, 41 rooms), becomes a guided three-step flow: set the rules, review a draft and fix clashes with one click each, then approve for one class, some classes or all, and share on the app. Nothing reaches teachers or parents until the coordinator approves, and approved timetables start on a date the coordinator chooses.

Daily story

Friday 9 Oct, 7:30 am. The screen opens on **"Good morning, Mrs. Sinha"** and a single focus card, **"5 THINGS NEED YOU · 1 OF 5"**. Dhruva shows the most urgent first:

1. **Cover 24 periods today** ("7 teachers are away · Dhruva has picked free teachers of the same subject"), button "Fill with Dhruva". After the coordinator fills and notifies, the card becomes "Cover sorted for today".
2. **30 lesson plans not in yet** (for 19–23 Oct, due Sat 10 Oct, Science and Maths furthest behind), button "Remind teachers".
3. **46 students below 40% in 2+ subjects**, grouped by Dhruva into 6 Saturday remedial groups, button "Create groups".
4. **4 parent queries about pace and marks**, button "Reply".
5. **New timetable from Tue 27 Oct** ("3 teachers are over their load · let Dhruva build a draft"), button "Generate with Dhruva". Once a draft exists it reads "Draft timetable waiting for your approval" with "Review draft", and after approval "New timetable shared". "Later ›" moves a card down the queue; "Up next" lists the following items; "See all 5 for today · 0 done" expands the whole list and counts completed items. Below the focus card come glance numbers and a "Coming up" calendar (Sat 10 Oct lesson plans due; Mon 12 Oct Term 1 exams begin, run by the exam cell; Thu 15 Oct Maths department meeting; Sat 17 Oct CBSE workshop on competency-based questions; Tue 27 Oct new timetable starts, if published).

Screens

Today (Desktop: "Today" tab, badge 5 · Phone: "Today" tab, badge 5)

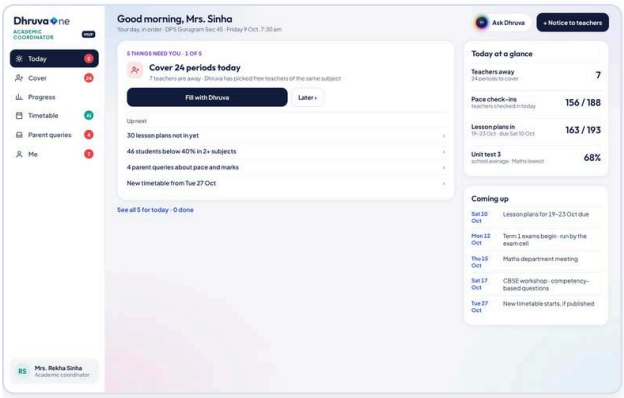

Desktop · Today

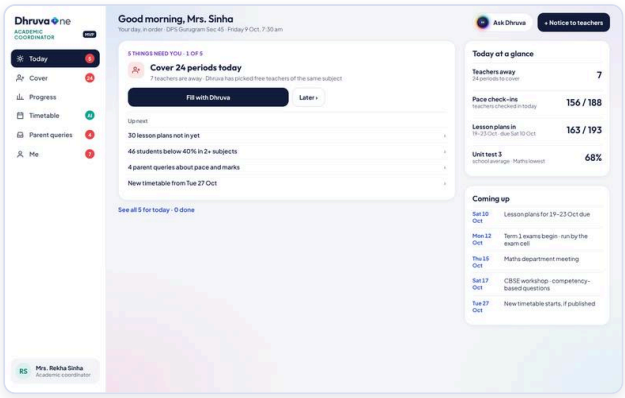

Desktop · Start

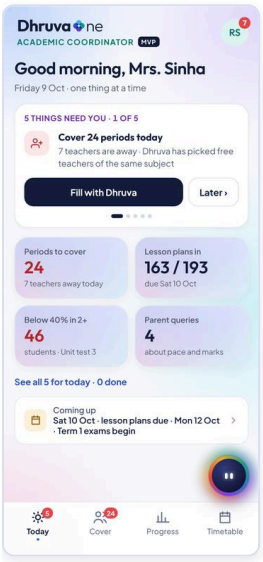

Phone · Today

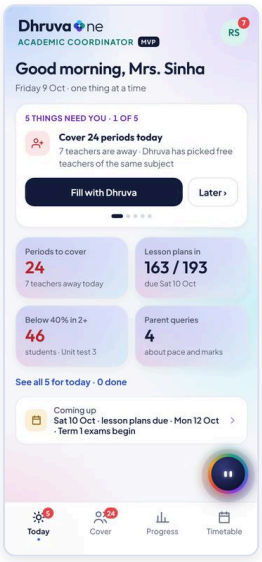

Phone · Start

- What it shows: greeting, "Your day, in order · DPS Gurugram Sec 45 · Friday 9 Oct, 7:30 am" (desktop), the "5 THINGS NEED YOU · 1 OF 5" focus card with the top task, an "Up next" queue (desktop: "30 lesson plans not in yet", "46 students below 40% in 2+ subjects", "4 parent queries about pace and marks", "New timetable from Tue 27 Oct"), "See all 5 for today · 0 done", "Today at a glance", "Coming up".
- Functions:
- "Ask Dhruva" (desktop header): opens the assistant panel with suggested questions (see Dhruva help).
- "+ Notice to teachers" (desktop header): shown as a toast "Notice composer opens here (same as the principal's)", i.e. the same notice composer the principal uses.
- Focus-card action ("Fill with Dhruva", "Remind teachers", "Create groups", "Reply", "Generate with Dhruva"): does the task or jumps to the right screen.
- "Later ›": pushes the current card back; "See all 5 for today": lists all with done/undone.
- Up-next rows ("›"): open that task.
- "Today at a glance" tiles (desktop): "Teachers away: 24 periods to cover = 7"; "Pace check-ins: teachers checked in today = 156 / 188"; "Lesson plans in: 19–23 Oct, due Sat 10 Oct = 163 / 193"; "Unit test 3: school average, Maths lowest = 68%". Each tile jumps to its screen (Cover, Progress, Progress, Progress > Learning outcomes).
- Phone shows four stat tiles instead: "Periods to cover 24 (7 teachers away today)", "Lesson plans in 163 / 193 (due Sat 10 Oct)", "Below 40% in 2+ 46 students · Unit test 3", "Parent queries 4 about pace and marks".
- Interactions and messages (verified): "Fill with Dhruva" assigns the suggested teacher to all open periods and toasts "Dhruva filled N periods · check and change any"; after notify the card says "Cover sorted for today". "Remind teachers" toasts "30 teachers reminded · HoDs copied". "Create groups" toasts "6 remedial groups created for Saturdays · parents told" and the card turns into "Remedial groups created · 6 groups on Saturdays · teachers and parents told". Completing a task moves the counter ("0 done" goes up) and the tab badges drop (Cover 24 to 0, Parent queries 4 to 3...).
- Dhruva help: ordering the day, choosing the substitutes, grouping at-risk students, drafting replies, building the timetable.

- Rules & edge cases: Cover badge and the Today badge fall as periods are filled. The timetable badge on the sidebar shows "AI" (nothing generated), "Draft" (draft waiting) or a tick (shared).

Cover (Desktop: "Cover" tab, badge 24 · Phone: "Cover" tab, badge 24)

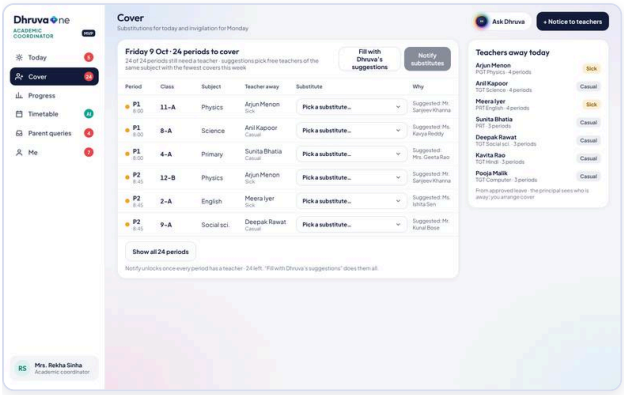

Desktop · Cover

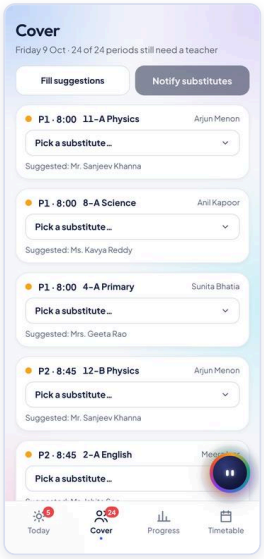

Phone · Cover

- What it shows: title "Cover: Substitutions for today and invigilation for Monday". Banner "Friday 9 Oct · 24 periods to cover" and "24 of 24 periods still need a teacher · suggestions pick free teachers of the same subject with the fewest covers this week". A table with columns Period / Class / Subject / Teacher away / Substitute / Why (sample: P1 8:00, 11–A Physics, Arjun Menon, Sick; P1 8–A Science, Anil Kapoor, Casual; P1 4–A Primary, Sunita Bhatia; P2 12–B Physics; P2 2–A English, Meera Iyer; P2 9–A Social sci., Deepak Rawat...). Six rows are shown; "Show all 24 periods" expands to all (P1 to P8, 8:00 to 1:35). Right-hand "Teachers away today" list: Arjun Menon (PGT Physics, 4 periods, Sick), Anil Kapoor (TGT Science, 4, Casual), Meera Iyer (PRT English, 4, Sick), Sunita Bhatia (PRT, 3, Casual), Deepak Rawat (TGT Social sci., 3), Kavita Rao (TGT Hindi, 3), Pooja Malik (TGT Computer, 3), with the footnote "From approved leave · the principal sees who is away; you arrange cover". Phone shows each period as a card (P1 · 8:00, class and subject, absent teacher) with a dropdown.
- Functions:
- "Fill with Dhruva's suggestions" (phone: "Fill suggestions"): sets every empty period to Dhruva's pick (marked with a star in the list). Toast "Dhruva filled 24 periods · check and change any". "Why" column then explains each choice, e.g. "free · Maths PGT · 1 cover this week", "free · Science TGT · 0 covers".
- Substitute dropdown per period ("Pick a substitute..."): three candidates, the first starred, each of the same subject and free that period; the row dot turns from amber to green once assigned. The coordinator can override Dhruva's pick.
- "Notify substitutes": disabled (greyed) until every period has a teacher; the hint reads "Notify unlocks once every period has a teacher · 24 left." If pressed early: toast "Assign every period first". When complete: toast "Substitutes told on the app · class teachers updated" and the button becomes "Substitutes notified".
- "Show all 24 periods" / "Show fewer periods".
- Dhruva help: picks substitutes by subject, free period and fewest covers this week, avoiding anyone who already has 3 or more covers (shown in Ask Dhruva as "Who has taken the most cover periods this week?").
- Rules & edge cases: absence comes from approved leave, not from the coordinator; the principal sees who is away, the coordinator arranges cover. The page header also mentions invigilation for Monday (exam invigilators swap through the coordinator, per the principal's notice), but the invigilator pickers were not visible on this screen in the rendered AC view, so treat invigilation here as shown only in the subtitle.

Progress: Check-ins and plans (Desktop: "Progress" tab, sub-tab "Check-ins and plans" · Phone: "Progress" tab, sub-tab "Check-ins and plans")

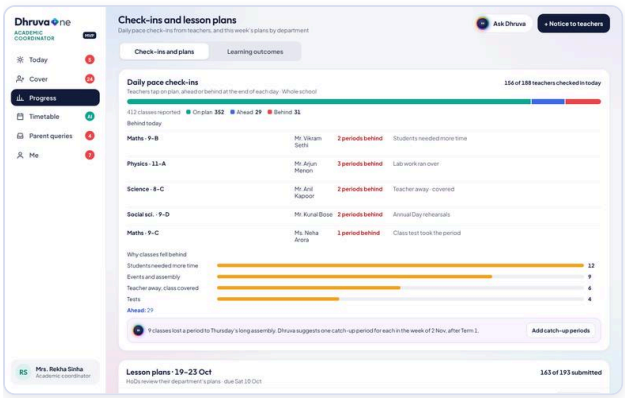

Desktop · Progress

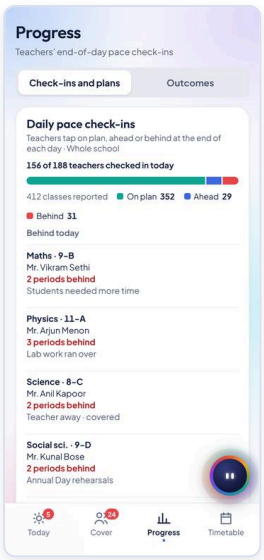

Phone · Progress

- What it shows: "Daily pace check-ins: Teachers tap on plan, ahead or behind at the end of each day · Whole school". "156 of 188 teachers checked in today · 412 classes reported" with split On plan 352 / Ahead 29 / Behind 31. "Behind today" list: Maths 9–B Mr. Vikram Sethi, 2 periods behind, "Students needed more time"; Physics 11–A Mr. Arjun Menon, 3 behind, "Lab work ran over"; Science 8–C Mr. Anil Kapoor, 2 behind, "Teacher away · covered"; Social sci. 9–D Mr. Kunal Bose, 2 behind, "Annual Day rehearsals"; Maths 9–C Ms. Neha Arora, 1 behind, "Class test took the period". "Why classes fell behind": Students needed more time 12, Events and assembly 9, Teacher away class covered 6, Tests 4 (and "Ahead: 29"). Dhruva note: "9 classes lost a period to Thursday's long assembly. Dhruva suggests one catch-up period for each in the week of 2 Nov, after Term 1." Then "Lesson plans · 19–23 Oct: HoDs review their department's plans · due Sat 10 Oct, 163 of 193 submitted" by department: Primary 64/72 (Remind 8), English 15/17 (Remind 2), Hindi and Sanskrit 20/23 (Remind 3), Maths 13/18 (Remind 5), Science 22/28 (Remind 6), Social science 16/18 (Remind 2), Computer 6/8 (Remind 2), Activities 7/9 (Remind 2).
- Functions:
- "Add catch-up periods": adds one catch-up period per affected class for the week of 2 Nov; toast "Catch-up periods added for the week of 2 Nov · teachers told" and the button becomes "Done".
- "Remind N" per department: reminds the teachers whose plans are missing; the HoD is copied (toast on the Today card version: "30 teachers reminded · HoDs copied").
- Sub-tab switch "Check-ins and plans" / "Learning outcomes".
- Rules & edge cases: coordinator sees the whole school; a HoD sees only their department (same component, "Maths department 14 of 18"). Plans are reviewed by HoDs, the coordinator only chases.

Progress: Learning outcomes (Desktop: "Progress" > "Learning outcomes" · Phone: "Progress" > "Outcomes")

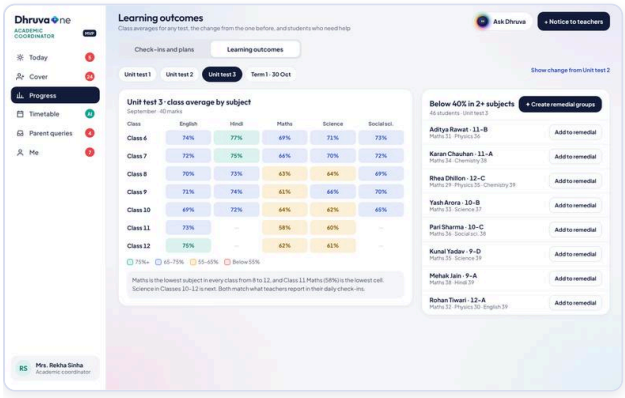

Desktop · Outcomes

Phone · Outcomes

- What it shows: exam pills "Unit test 1", "Unit test 2", "Unit test 3", "Term 1 · 30 Oct" (dashed, results not in yet; text "Term 1 exams run 12–16 Oct. Teachers enter marks by Fri 23 Oct and results appear here on Fri 30 Oct, with the same view and the change from Unit test 3."). Heat table "Unit test 3 · class average by subject · September · 40 marks": rows Class 6 to 12 against English, Hindi, Maths, Science, Social sci. coloured 75%+, 65–75%, 55–65%, below 55% (e.g. Class 11 Maths 58% lowest, Class 9 Maths 61%, Class 8 Maths 63%). Dhruva reading: "Maths is the lowest subject in every class from 8 to 12... Science in Classes 10–12 is next. Both match what teachers report in their daily check-ins." Class 11 and 12 have no Hindi or Social sci. (shown as an em dash). Risk list "Below 40% in 2+ subjects: 46 students · Unit test 3" (Aditya Rawat 11–B Maths 31 Physics 36; Karan Chauhan 11–A; Rhea Dhillon 12–C three subjects; Yash Arora 10–B; Pari Sharma 10–C; Kunal Yadav 9–D; Mehak Jain 9–A; Rohan Tiwari 12–A).
- Functions: exam pills switch the test; "Show change from Unit test 2" overlays triangles up/down per cell (shows "✓ Showing change"); "✦ Create remedial groups" (phone: "✦ Make groups") groups all 46 for Saturday sessions; per student "Add to remedial" (phone "Remedial").
- Rules: Unit test 1 and 2 give shorter risk lists (31, 38 students); school average and lowest subject are quoted on Today ("68% · Maths lowest").

Timetable (Desktop: "Timetable" tab, badge AI/Draft/tick · Phone: "Timetable" tab) , the generator in detail

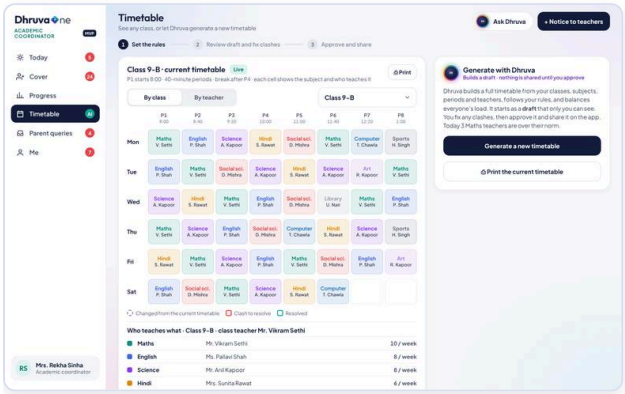

Desktop · Timetable

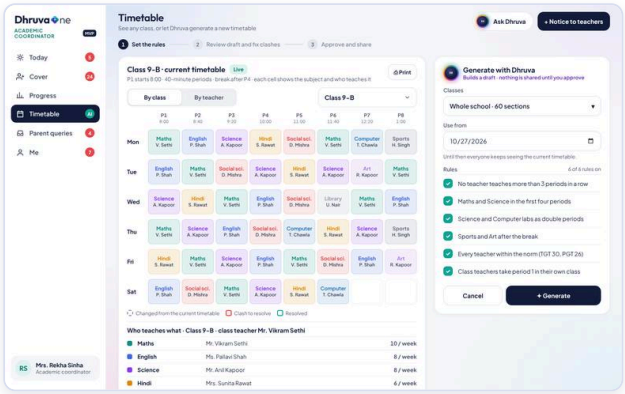

Desktop · Tt setup

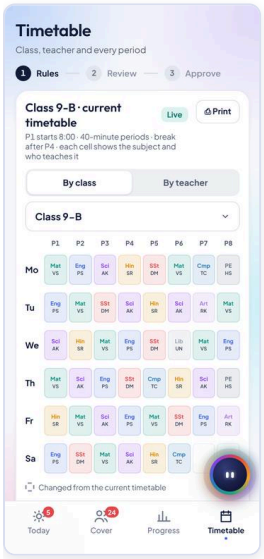

Phone · Timetable

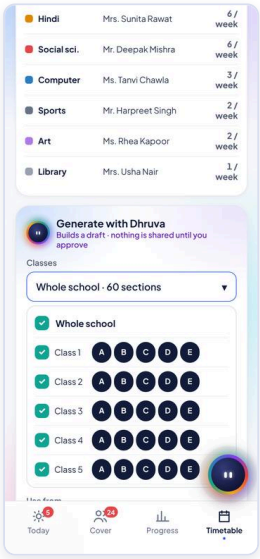

Phone · Tt setup

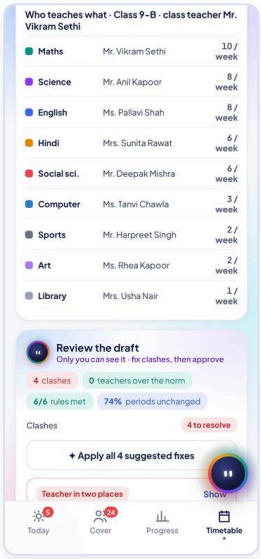

Phone · Tt draft

- What it shows (current state): three-step tracker "1 Set the rules · 2 Review draft and fix clashes · 3 Approve and share". Grid titled "Class 9–B · current timetable" with a "Live" chip: "P1 starts 8:00 · 40-minute periods · break after P4 · each cell shows the subject and who teaches it", columns P1 8:00, P2 8:40, P3 9:20, P4 10:00, P5 11:00, P6 11:40, P7 12:20, P8 1:00; rows Mon to Sat. Under the grid "Who teaches what · Class 9–B · class teacher Mr. Vikram Sethi" (Maths Mr. Vikram Sethi 10/week, English Ms. Pallavi Shah 8, Science Mr. Anil Kapoor 8, Hindi Mrs. Sunita Rawat 6, Social sci. Mr. Deepak Mishra 6, Computer Ms. Tanvi Chawla 3, Sports Mr. Harpreet Singh 2, Art Ms. Rhea Kapoor 2, Library Mrs. Usha Nair 1). The phone grid uses short codes (Mat VS, Eng PS, Sci AK...).
- Viewing controls (always available): "By class" / "By teacher" toggle; picker "Class 9–B / Class 10–C / Class 6–A" (in teacher mode: every teacher with subject, e.g. "Mr. Vikram Sethi · Maths"); "⎙ Print" (opens the print dialog described below). In teacher mode each cell shows the class and subject, and the "who" block reads "<Teacher> teaches" with classes and periods per week (marking "class teacher").
- Right panel in current state: "Generate with Dhruva · Builds a draft · nothing is shared until you approve". Text: "Dhruva builds a full timetable from your classes, subjects, periods and teachers, follows your rules, and balances everyone's load. It starts as a draft that only you can see. You fix any clashes, then approve it and share it on the app. Today 3 Maths teachers are over their

norm." Buttons "Generate a new timetable" and "⎙ Print the current timetable". (On the Today card the same entry is "New timetable from Tue 27 Oct".)

Step 1, Set the rules (verified). Clicking "Generate a new timetable" shows:

- **Classes** (multi-select dropdown, default "Whole school · 60 sections"): opens a checklist. Top checkbox "Whole school" (tri-state: all, some "–", none) toggles all 60 sections. Then 12 rows "Class 1" to "Class 12", each a tri-state checkbox for the whole grade plus round chips A, B, C, D, E (sections) that toggle individually. The button label updates: "Whole school · 60 sections", "Class 9–B, 9–C" (up to 4 sections), "10 sections picked" (more), or "Pick one or more classes" when none. Pressing "✦ Generate" with none selected toasts "Pick the classes first". Verified: Whole school off, then Class 9 and Class 10 ticked, gave "10 sections picked" and a 10-class draft.
- **Use from** (date field, default 10/27/2026 i.e. Tue 27 Oct): "Until then everyone keeps seeing the current timetable." Changeable here and again in the approve dialog.
- **Rules** (each a checkbox row, "N of 6 rules on"; all on by default): "No teacher teaches more than 3 periods in a row"; "Maths and Science in the first four periods"; "Science and Computer labs as double periods"; "Sports and Art after the break"; "Every teacher within the norm (TGT 30, PGT 26)"; "Class teachers take period 1 in their own class". Verified: switching one off changes the result chip to "5/5 rules met".
- Buttons "Cancel" (back to the current timetable) and "✦ Generate".

Running. The panel shows a progress bar and four ticking steps: "Reading 60 sections, 193 teachers and 41 rooms", "Placing 2,880 periods for the week", "Checking clashes and your rules", "Balancing teacher load" (about 4 seconds), then moves to the draft.

Step 2, Review the draft and fix clashes (verified).

- Grid header changes to "Class 9–B · 10 of 46 periods changed" with chip "Draft · 3 clashes" (red) or "Draft · ready to approve" (amber) or "Approved and shared" (teal). A yellow banner: "DRAFT: Only you can see this. Teachers and parents keep seeing the current timetable until you approve and share it." Legend: dashed outline = "Changed from the current timetable"; red = "Clash to resolve"; teal = "Resolved". Clash cells show a red "Clash" label, resolved ones "Resolved" with a tick; tapping a clash cell highlights its card on the right.
- Right panel "Review the draft · Only you can see it · fix clashes, then approve". Summary chips: "4 clashes", "0 teachers over the norm", "6/6 rules met", "74% periods unchanged". "Clashes: 4 to resolve" chip.
- "✦ Apply all N suggested fixes" (**Fix all**): applies Dhruva's recommended option to every open clash; toast "Applied the suggested fix to every open clash"; chip turns "All resolved".
- Clash cards (one per clash, only for the classes picked): kind tag, title, the Suggested fix, and buttons "Show" (jumps the grid to that class and highlights the cell), "Apply" (applies the suggestion) and "Other options" (opens two alternatives; "Hide other options" closes them). After applying, the card turns green with the outcome sentence and "Undo" (reopens the clash). The four sample clashes:

1. Teacher in two places, Mr. Vikram Sethi, Tue P2, 9–B and 9–A. Suggested "Move 9–A Maths to Wed P2" (he is free; Hindi swaps into Tue P2). Others: "Swap 9–B Maths with Tue P3 English"; "Ask Mrs. Kirti Malhotra to take 9–A" (she is at 29 of 30 periods).
2. Room clash, Computer Lab 2, Mon P7, 9–B and 11–C. Suggested "Use Computer Lab 1 for 9–B" (32 seats vs 38 students, pairs up). Others: "Move 11–C to Mon P8"; "Split 9–B across both labs" (needs a second supervisor).
3. Teacher in two places, Ms. Neha Arora, Thu P1, 10–C and 9–C (she is also 1 over norm). Suggested "Swap 10–C Maths with Thu P4 Hindi". Others: "Give 9–C Thu Maths to Mr. Manish Tyagi" (he is 4 over norm); "Move 9–C Maths to Fri P2" (Maths three days running).
4. Teacher not available, Mr. Deepak Mishra, Thu P4, 9–B Social sci. (approved Thursday leave for CBSE examiner training, from the leave calendar). Suggested "Swap with Fri P6 Social sci.". Others: "Ask Ms. Rekha Bisht to cover Thursdays" (30 of 30); "Keep it and plan a cover each week".

- Dhruva also lists load-balancing notes (e.g. Mr. Manish Tyagi gives 8–C to Ms. Tanvi Chawla, load 34 to 30; Physics practicals for 11–A to 11–D become double periods; one soft rule bent for 10–C Sports on Fridays because the ground is booked) and teacher load before/after.
- Below the clash list: note "N clashes are still open; classes without a clash can be approved now. X of Y classes approved so far." Buttons: "Approve and share..." (greys to "Every class is approved" when done), "Change rules" (back to Step 1), "⎙ Print draft", "Save draft and close" (toast "Draft saved · only you can see it").

Step 3, Approve and share (approval for one, some or all classes; verified). "Approve and share..." opens the dialog "STEP 3 OF 3 · Approve and share this timetable": "Once you approve, it can no longer be edited without making a new version. Nothing changes on the app until the start date."

- **Approve for** (3 pills): "This class · 9–B" (the class currently on screen), "Choose classes" (opens the same Class 1 to 12 / A to E checklist, but only classes not yet approved), "All remaining · N". A live sentence says which are ready: e.g. "8 classes are ready: 9–A, 9–C, 9–D, 9–E, 10–A, 10–B... 9–B, 10–C have open clashes and stay in draft." or "Nothing is ready yet." So clash-free classes can be approved while others stay in draft, and a class with open clashes is never approved.
- **Live from**: date field (the start date).

- **Share on the app with** (checkbox list, all on by default): "Teachers · 193 teachers · in their day view"; "Heads of department · 11 HoDs · with the clash report"; "Parents · 2,140 families · app notification and WhatsApp"; "Students · Classes 9 to 12 · in the student app". With none ticked, confirm toasts "Pick who to share it with".
- "What they get on their phone": the message "DPS Gurugram: the new timetable starts Tue 27 Oct. Open Timetable in the app to see every period and who teaches it."
- Buttons "Back to draft" and the confirm button, labelled "Approve and share N classes" (or "Nothing ready to approve", greyed; toast "No class is ready yet. Resolve the open clashes first.").
- On confirm: toast "Approved N class(es) · shared with 4 groups · live from Tue 27 Oct". If only some classes are done, the review panel shows "X of Y classes approved and shared · live from Tue 27 Oct" with the list of classes (first 8, then "and N more") and a link "Withdraw all" (toast "Withdrawn · all classes back to draft"). Verified: approving only 9–B showed "1 of 60 classes approved and shared · live from Tue 27 Oct · 9–B"; scope stays on "This class" until changed, so a second approve reports "Nothing is ready yet" until "All remaining" is picked.
- When every selected class is approved the stage becomes **Shared**: step tracker all ticked, green "SHARED: Approved by you and sent to teachers and parents on the app. It goes live on the start date; the old timetable stays until then." Right panel "Timetable shared · Live from Tue 27 Oct · you can print or withdraw it", "✓ All classes approved and shared · live from Tue 27 Oct", rows Teachers 193 / Heads of department 11 / Parents 2,140 families / Students Classes 9 to 12, text "Teachers see it in their day view and parents in the app. The old timetable stays until the start date." Buttons "🖨 Print", "Withdraw" (toast "Withdrawn · back to draft · the app still shows the old timetable") and "Make another version" (back to Step 1).

Print dialog (from any state). "Print timetable": note "Printing the live timetable." / "This is a draft. Every page is marked DRAFT so nobody mistakes it for the live timetable." / "Printing the approved timetable that starts Tue 27 Oct." What to print: "This class · 9–B" (one page for the class board), "One teacher · V. Sethi" (a personal timetable for the staff room), "Every class" (60 pages, one per section), "Master sheet" (all teachers on one sheet, 2 pages). Include: "Teacher names in each cell", "Signature line at the bottom" (footer "Academic coordinator: Mrs. Sinha · Signature: ____"). Colour: "Colour" / "Black and white". Paper: "A4 landscape" / "A3 landscape". Live preview "PREVIEW · Page 1 of 1" (or "1 of 60"), header "DPS Gurugram · Sector 45, Weekly timetable · 2026–27", status line "CURRENT · live now" / "DRAFT · not shared" with a large DRAFT watermark / "APPROVED · from Tue 27 Oct", "Printed Fri 9 Oct 2026", footer "Lunch 12:20". Buttons "Close", "Save as PDF" (toast "Saved as PDF · timetable.pdf" or "timetable-draft.pdf") and "🖨 Print 1 page" (toast "Sent to the printer · 1 page", with ", marked DRAFT" for drafts).

- Dhruva help on this screen: builds the whole draft, reasons about teacher load against norms (TGT 30, PGT 26), recommends one fix per clash with the trade-off of the alternatives, and tells which classes are ready.
- Rules & edge cases: nothing is visible to anyone but the coordinator until approval; approval is per class (one, some or all) and blocked while that class has an open clash; the start date is deferred (old timetable stays live until then); approved timetables cannot be edited without making a new version; withdrawing returns classes to draft. In the sample only classes 9–B, 10–C and 6–A carry detailed grids; other sections are generated but shown only through these three.
- Audit: the draft/approve/withdraw/share steps and recipients are explicit; no separate audit log screen is shown in the design (see Gaps).

Parent queries (Desktop: "Parent queries" tab, badge 4 · Phone: reached from the Today "Parent queries" card, opens a "Reply" sheet)

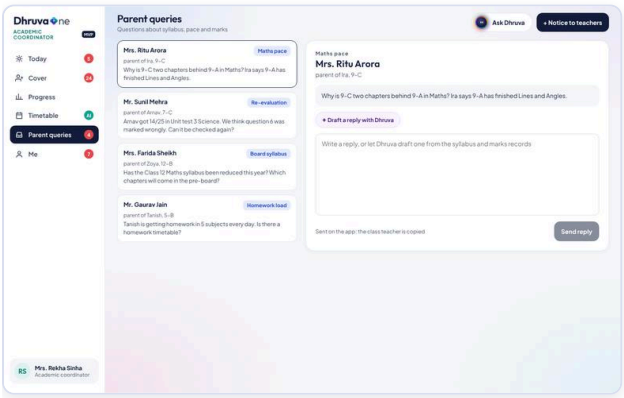

Desktop · Parent queries

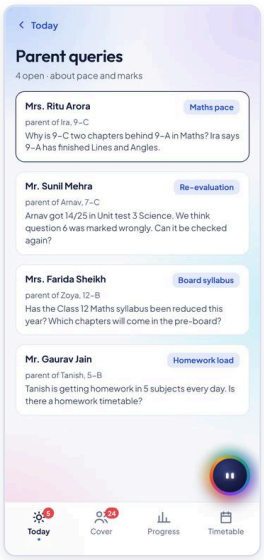

Phone · Reply

- What it shows: left list of four queries (Mrs. Ritu Arora, Maths pace, parent of Ira 9–C: "Why is 9–C two chapters behind 9–A in Maths?"; Mr. Sunil Mehra, Re-evaluation, parent of Arnav 7–C, 14/25 Unit test 3 Science Q6; Mrs. Farida Sheikh, Board syllabus, parent of Zoya 12–B; Mr. Gaurav Jain, Homework load, parent of Tanish 5–B), and the open query on the right.

- Functions: "✦ Draft a reply with Dhruva" fills an editable reply (toast "Dhruva drafted a reply · edit before sending"); the text box can be edited; "Send reply" (greyed until there is a draft) sends it ("Reply sent to Mrs. Ritu Arora on the app") and the list tag becomes "Replied". Note under the form: "Sent on the app; the class teacher is copied".
- Example draft (homework): "Classes 3–5 follow a homework timetable of two subjects a day. I have shared it with class teacher 5–B and it will be in the app from Monday."
- Rules: replies go through the app, with the class teacher copied; Dhruva drafts from the syllabus and marks records but a human sends.

Me (Desktop: "Me" tab, badge 7 · Phone: avatar "RS" top-right opens "Me: leave, payslips, notices")

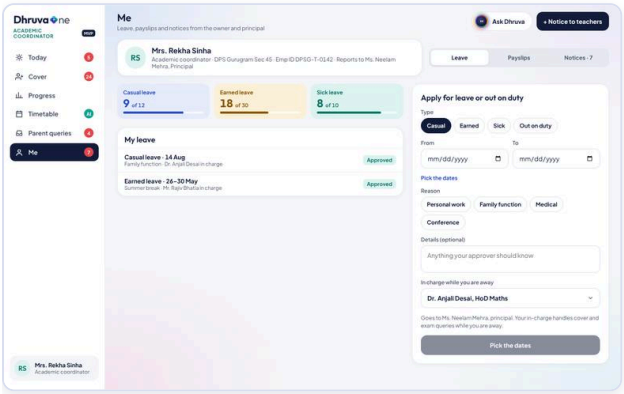

Desktop · Me

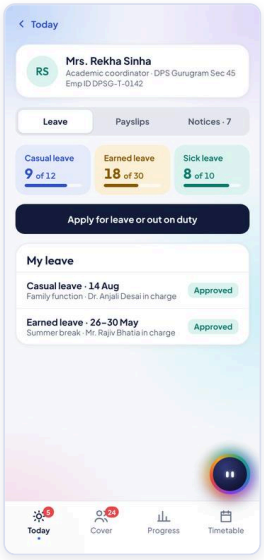

Phone · Me

- What it shows: profile "Mrs. Rekha Sinha, Academic coordinator · DPS Gurugram Sec 45 · Emp ID DPSG-T-0142 · Reports to Ms. Neelam Mehra, Principal"; tabs "Leave", "Payslips", "Notices · 7".
- Functions (Leave): balances "Casual leave 9 of 12", "Earned leave 18 of 30", "Sick leave 8 of 10"; "My leave" history (Casual 14 Aug, Family function, Dr. Anjali Desai in charge, Approved; Earned 26–30 May, Mr. Rajiv Bhatia in charge, Approved); "Apply for leave or out on duty" form: Type (Casual, Earned, Sick, Out on duty), From, To, Reason chips (Personal work, Family function, Medical, Conference), Details (optional), "In charge while you are away" (Dr. Anjali Desai HoD Maths; Mrs. Anita Joshi HoD English; Mr. Rajiv Bhatia vice principal). Text: "Goes to Ms. Neelam Mehra, principal. Your in-charge handles cover and exam queries while you are away." Out on duty: "Goes to the principal. No leave is used; cover for your work is arranged as for leave."
- Payslips (phone verified): September 2026 credited 1 Oct net 74,870 rupees; August; July; note "Payslips come from the payroll HR runs in DhruvaOne, approved by the principal."
- Notices (7, phone verified): from the Chairman Mr. V.K. Shunglu ("October salary before Dussehra", "Diwali greetings and break dates"), Group office ("Term 1 exams: conduct and invigilation"), Group HR ("Health insurance: add family members by 23 Oct"), Ms. Neelam Mehra principal ("Staff meeting, Saturday 10 Oct at 12:30 pm", "Term 1 exam duty roster", "Block B water cooler under repair till Thursday"). Some require confirmation ("Please confirm...").

Gaps / differences between desktop and phone

- Phone has 4 bottom tabs (Today, Cover, Progress, Timetable); Parent queries and Me are reached from the Today card and the avatar. Desktop has 6 sidebar tabs, header "Ask Dhruva" and "+ Notice to teachers" (not on phone).
- Timetable grid on phone uses short subject and teacher codes (Mo, Mat VS); the generator, clash fixing, partial approval dialog and print dialog all exist on phone (verified), laid out as a single column.
- Desktop Cover has a "Teachers away today" side list and Why column; phone shows each period as a card.
- Desktop Today has a glance panel and Coming-up calendar; phone shows four stat tiles and a one-line "Coming up".
- Lesson-plan department rows and "Remind N" exist on both; Progress outcomes phone table drops the % sign and shows 6 risk rows.

ACADEMICS · DESKTOP · PHONE

Head of Department

Reviews the department's lesson plans, question papers and leave before they go up to the coordinator, exam cell or principal, and watches pace, results and homework for the subject.

Who uses it. a head of department who also teaches (sample: Dr. Anjali Desai, HoD Maths, PGT, Emp ID DPSG-T-0088, DPS Gurugram Sec 45, reports to Ms. Neelam Mehra, Principal; leads 18 Maths teachers, 6 PGT and 12 TGT, 2 PGT posts vacant; teaches 12–A and 12–B herself).

On the following pages:

- Today (Desktop: "Today", badge 4 · Phone: "Today", badge 4, with a toggle "My department" / "My classes")
- My classes (Desktop: "My classes" tab · Phone: "Today" > "My classes" toggle)
- Reviews: Lesson plans and Question papers (Desktop: "Reviews" tab, badge 10 · Phone: "Reviews", badge 10)
- My team (Desktop: "My team" tab, sub-tabs Team / Leave · 4 / Meetings · Phone: "Team" tab, badge 4, with a "Team leave" card)
- Progress (Desktop: "Progress" tab, sub-tabs Syllabus / Check-ins / Results / Homework · Phone: "Progress" tab, sub-tabs Results / Homework)
- Calendar (Desktop: "Calendar" tab · Phone: via Today "Calendar ›")
- Me (Desktop: "Me" tab · Phone: avatar "AD", badge 7)

Business summary

A head of department is the quality gate between teachers and the school's central roles. Everything the Maths team produces, a weekly lesson plan, a Term 1 question paper, a leave request, passes the HoD first, so the coordinator, exam cell and principal only see work that has been checked. DhruvaOne turns this into one decision queue ("1 OF 3 · 14 DECISIONS") with Dhruva's suggested answer on each: approve a one-day leave, send a five-day leave to the principal with a cover plan, flag a paper question that is too long, or nudge a teacher whose plan is late. The HoD also sees the department's real picture: who checked in on pace today, which sections are behind on the syllabus, where Unit test 3 marks are weakest (Trigonometry), how fast homework comes back, and which teachers are over their load. Because the HoD also teaches, the app keeps her own classes (attendance, homework, lesson plan, parent messages) in the same place so nothing falls between the two jobs.

Daily story

Fri 9 Oct. "Good morning, Dr. Desai" with the focus card **"1 OF 3 · 14 DECISIONS"**. The first item is **"Leave · Ms. Neha Arora, Casual · Mon 19 Oct"** with the button "Review leave" (and "Later ›"). "Up next" lists "Paper · Class 9 Maths" and "Lesson plan · Mr. Sanjeev Khanna", then "See all 14 in Reviews". A "Your team today" panel says "All 18 Maths teachers are in · No cover needed in your department today", notes that two of her team cover other subjects (Mr. Sanjeev Khanna covers Physics 11–A, 12–B, 11–C, 12–A for Mr. Menon; Ms. Neha Arora covers 8–D Science P7, arranged by Mrs. Sinha), that Mr. Vikram Sethi is on leave Monday (Class 9 Maths paper day, invigilation cover by the exam cell), and shows the Thursday 15 Oct 2:30 pm department meeting agenda.

Screens

Today (Desktop: "Today", badge 4 · Phone: "Today", badge 4, with a toggle "My department" / "My classes")

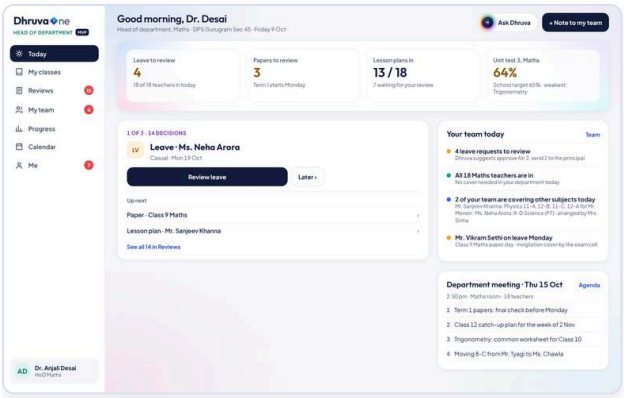

Desktop · Today

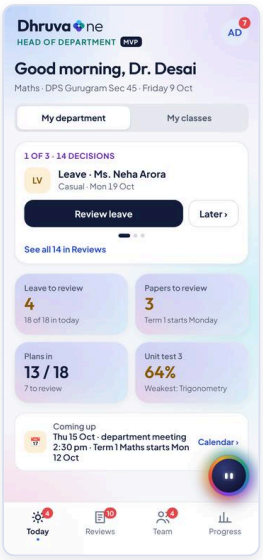

Phone · Today

- What it shows: tiles "Leave to review 4 (18 of 18 teachers in today)", "Papers to review 3 (Term 1 starts Monday)", "Lesson plans in 13 / 18 (7 waiting for your review)", "Unit test 3, Maths 64% (School target 65% · weakest: Trigonometry)". Decision queue card, "Your team today" list and meeting agenda (desktop), "Coming up" strip with "Calendar ›" (phone: "Thu 15 Oct · department meeting 2:30 pm · Term 1 Maths starts Mon 12 Oct").
- Functions: "Ask Dhruva" and "+ Note to my team" in the desktop header (a note to all 18 teachers, lands in their Inbox under "From your HoD"; toast "Note sent to all 18 Maths teachers · it appears in their Inbox under “From your HoD”"); focus card action ("Review leave", "Review plan", "Review paper") opens the matching review; "Later ›" defers; "See all 14 in Reviews"; tiles jump to Team leave / Papers / Lesson plans / Progress > Results; "Calendar ›" opens the department calendar (phone).
- Dhruva help: ranks the 14 decisions; marks "Dhruva suggests approve for 2, send 2 to the principal" for the four leave requests.
- Rules: the department's cover is the coordinator's job; the HoD only sees whether cover is needed.

My classes (Desktop: "My classes" tab · Phone: "Today" > "My classes" toggle)

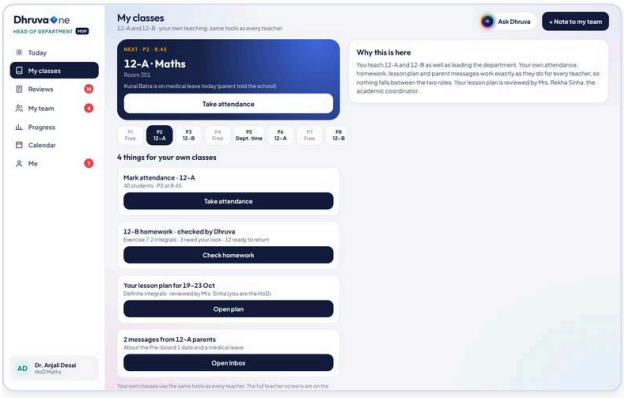

Desktop · My classes

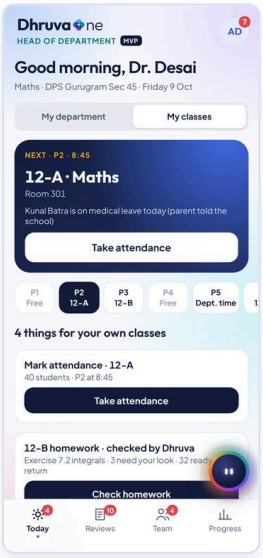

Phone · My classes

- What it shows: "12–A and 12–B · your own teaching, same tools as every teacher". "NEXT · P2 · 8:45 · 12–A · Maths · Room 301" with the note "Kunal Batra is on medical leave today (parent told the school)" and "Take attendance". Day strip P1 Free, P2 12–A, P3 12–B, P4 Free, P5 "Dept. time", P6 12–A, P7 Free, P8 12–B. "4 things for your own classes": "Mark attendance · 12–A (40 students · P2 at 8:45)", "12–B homework · checked by Dhruva (Exercise 7.2 integrals · 3 need your look · 32 ready to return)" with "Check homework", "Your lesson plan for 19–23 Oct (Definite integrals · reviewed by Mrs. Sinha, you are the HoD)" with "Open plan", "2 messages from 12–A parents (About the Pre-board 1 date and a medical leave)" with "Open Inbox".

- Functions: "Take attendance" (toast "Attendance marked · 39 of 40 present" in the teacher flow), "Check homework", "Open plan", "Open Inbox".
- Note: "Why this is here: You teach 12–A and 12–B as well as leading the department... nothing falls between the two roles." On the phone: "The full teacher screens are on the desktop under My classes." Her own plan is reviewed by the academic coordinator, not by herself.

Reviews: Lesson plans and Question papers (Desktop: "Reviews" tab, badge 10 · Phone: "Reviews", badge 10)

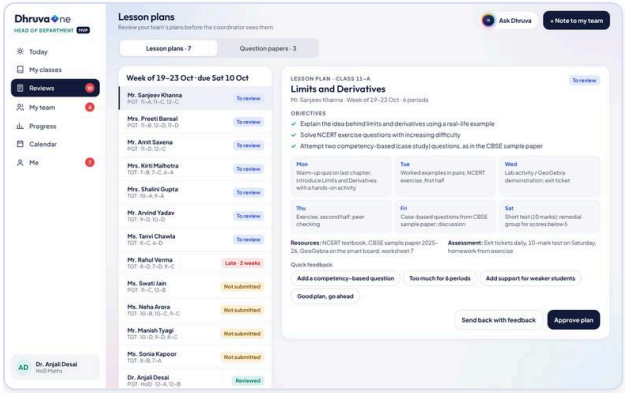

Desktop · Reviews

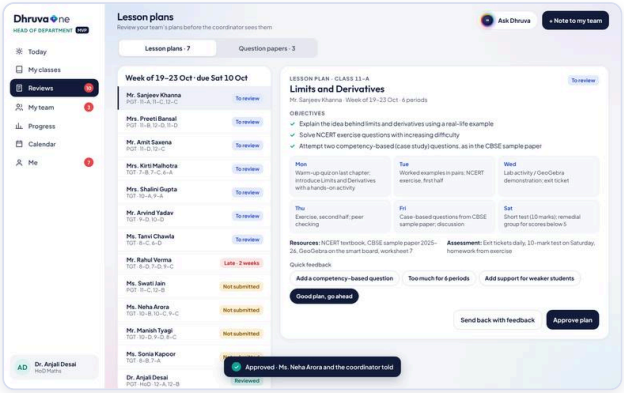

Desktop · Plan review

Phone · Reviews

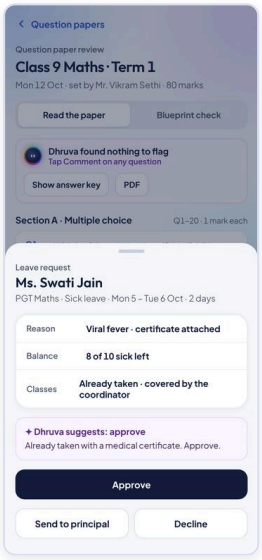

Phone · Paper review

- What it shows (Lesson plans tab, "Lesson plans · 7"): title "Lesson plans: Review your team's plans before the coordinator sees them", "Week of 19–23 Oct · due Sat 10 Oct". Teacher rows with posts, classes and status: "To review" (Sanjeev Khanna, Preeti Bansal, Amit Saxena, Kirti Malhotra, Shalini Gupta, Arvind Yadav, Tanvi Chawla), "Late · 2 weeks" (Rahul Verma), "Not submitted" (Swati Jain, Neha Arora, Manish Tyagi, Sonia Kapoor), "Reviewed" (6 incl. the HoD). Phone groups them as "Waiting for you · 7" and "Not in yet · 5" with "Remind all 5" and "Show 6 reviewed plans", plus the line "Pace: 14 of 18 checked in today · 6 classes behind · see Team".
- Plan detail (verified): "LESSON PLAN · CLASS 11–A · Limits and Derivatives · Mr. Sanjeev Khanna · Week of 19–23 Oct · 6 periods", OBJECTIVES with tick marks, Mon to Sat day-by-day activities (warm-up quiz, worked examples in pairs, GeoGebra demonstration, case-based CBSE sample questions, 10–mark Saturday test), Resources and Assessment lines. "Quick feedback" chips: "Add a competency-based question", "Too much for 6 periods", "Add support for weaker students", "Good plan, go ahead". Buttons "Send back with feedback" and "Approve plan".
- Interactions (verified): "Approve plan" turns the row to "Reviewed", the tab count drops 7 to 6, toast "Plan approved · Mr. Sanjeev Khanna told" and the plan moves up to the coordinator's tracker. "Send back with feedback" toasts "Sent to <name>: “<chip text>”".
- Question papers tab ("Question papers · 3" on desktop, "Papers · 3" on phone): "Maths papers: Set by teachers · you review · the exam cell moderates and prints". List with stage: "Class 10 Maths · Pre-board 1 · Mon 7 Dec · Ms. Neha Arora · With teacher · due 23 Oct"; "Class 9 Maths · Mon 12 Oct · Mr. Vikram Sethi · With HoD"; "Class 10 Maths · With HoD"; "Class 12 Maths · Wed 14 Oct · Dr. Anjali Desai · With HoD"; "Class 7 Maths", "Class 11 Maths" "With exam cell"; "Class 6 Maths", "Class 8 Maths" "Printed and sealed".
- Paper review (verified): "QUESTION PAPER REVIEW · Class 10 Maths · Term 1 · Mon 12 Oct · set by Mr. Vikram Sethi · 80 marks · 3 hours · Waiting for your review". Two views, "Read the paper" and "Blueprint check". Dhruva banner: "Dhruva marked 2 questions for you to look at" (Class 9: "Dhruva found nothing to flag"). Questions by section (A MCQ Q1–20 1 mark; B Very short

Q21–25 2 marks; C Short Q26–31 3 marks; D Long Q32–35 5 marks; E Case studies Q36–38 4 marks), each with marks, chapter, difficulty tag (Easy/Average/Hard) and a "Comment" button. Flagged sample: Q28 (Hard) "One of 5 trigonometry questions: the chapter has 18 marks against 12". "Show answer key" and "PDF" (toast "PDF downloaded · watermarked “HoD review copy”"). Blueprint check compares marks per chapter against the plan (Class 10: Introduction to Trigonometry 12 planned vs 18 set; Arithmetic Progressions 8 vs 4; Class 9 and 12 similar) plus difficulty split (e.g. 24/46/30 easy/average/hard).

- Comment: tapping "Comment" offers chips "Too long for the marks", "Wording unclear", "Repeated from a past paper", "Swap for another chapter"; a "Your comment:..." tag appears with "Remove".
- Actions: "✦ Draft a note from the flags and comments" (toast "Note drafted from the checks and your comments"), note box "Note for the setter (optional)", "Send back to setter" (toast "Sent back to <setter> with your note · due Sat 10 Oct, 12 pm", or Fri 30 Oct for Pre-board), "Approve · send to exam cell" (stage becomes "With exam cell"; the exam cell moderates and prints).
- Rules: a paper cannot reach printing without HoD approval; plan approval sends the plan to the coordinator tier; "Remind all 5" reminds the teachers whose plans are missing (toast "Reminders sent · each teacher sees “Lesson plan for 19–23 Oct” on Today").

My team (Desktop: "My team" tab, sub-tabs Team / Leave · 4 / Meetings · Phone: "Team" tab, badge 4, with a "Team leave" card)

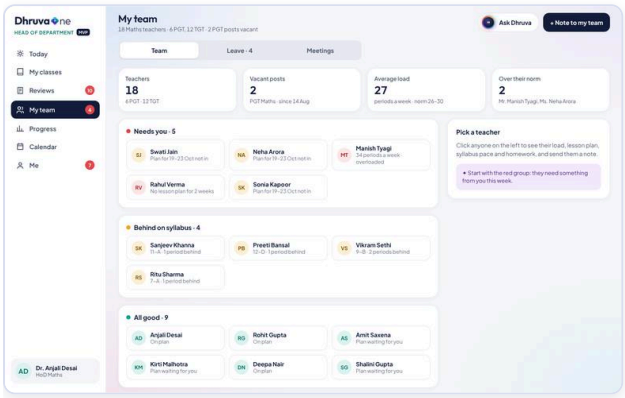

Desktop · My team

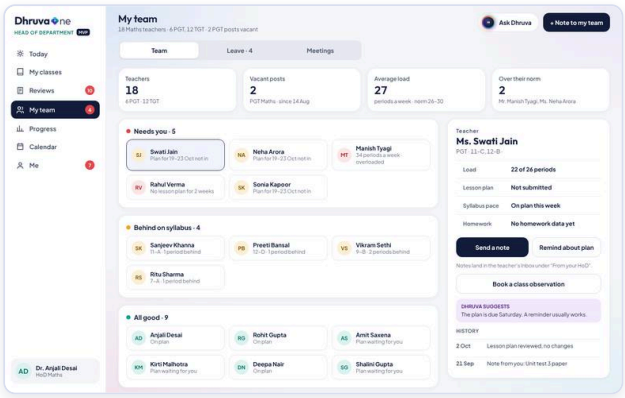

Desktop · Team teacher

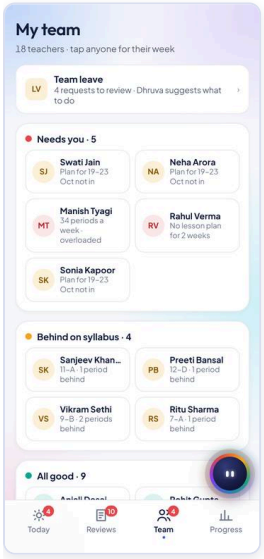

Phone · Team

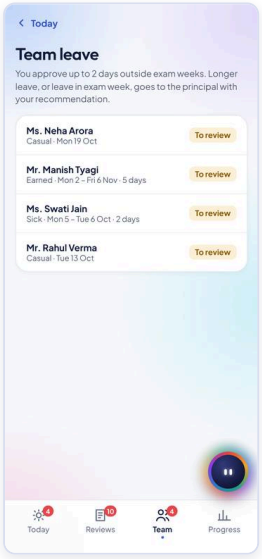

Phone · Team leave

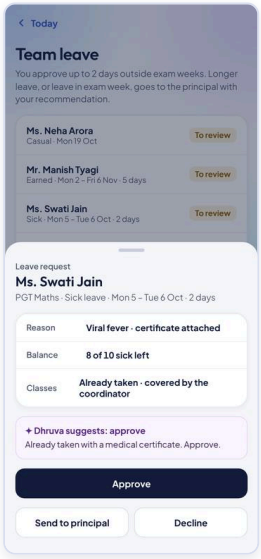

Phone · Leave sheet

- What it shows (Team): "18 Maths teachers · 6 PGT, 12 TGT · 2 PGT posts vacant". Stat tiles: Teachers 18; Vacant posts 2 ("PGT Maths · since 14 Aug"); Average load 27 periods a week (norm 26–30); Over their norm 2 (Mr. Manish Tyagi, Ms. Neha Arora). Groups: "Needs you · 5" (Swati Jain, Neha Arora plan not in; Manish Tyagi 34 periods, overloaded; Rahul Verma no plan for 2 weeks; Sonia Kapoor), "Behind on syllabus · 4" (Sanjeev Khanna 11–A, Preeti Bansal 12–D, Vikram Sethi 9–B 2 periods, Ritu Sharma 7–A), "All good · 9" with "Show all 9" and "See the full table". Dhruva prompt: "Start with the red group: they need something from you this week."
- Teacher detail (click a name; verified): Load ("22 of 26 periods"), Lesson plan status, Syllabus pace, Homework; buttons "Send a note" (toast "Note sent · it appears in <teacher>'s Inbox in the teacher app"; adds to HISTORY), "Remind about plan" (only for pending or late plans; toast "Reminder sent to <name> · shows on her Today in the teacher app"), "Book a class observation" (slot pills "Mon 12 Oct · period 3", "Wed 14 Oct · period 5", "Fri 16 Oct · period 2"; toast "Class observation booked · <slot> · <teacher> told; it shows on her timetable"). A "DHRUVA SUGGESTS" line adapts (e.g. "The plan is due Saturday. A reminder usually works."; for the overloaded: "Moving one section to a teacher under the norm would bring her to 30 periods. Dhruva can

put it on Thursday's agenda."; for late: "No plan for 2 weeks. A reminder first; if it is missed again, a conversation is better than another note."). HISTORY lists past notes and reviews. Phone: a bottom sheet with the same data.

- Team leave (verified; "Team leave: Approve short leave, or send it to the principal with your recommendation"): rule text "You approve up to 2 days outside exam weeks. Longer leave, or leave in exam week, goes to the principal with your recommendation." Four requests, each with Dhruva's suggestion: Ms. Neha Arora, Casual, Mon 19 Oct, sister's wedding, 6 of 12 casual left, 5 periods and 3 free Maths teachers can cover, suggest approve; Mr. Manish Tyagi, Earned, Mon 2–Fri 6 Nov, 5 days, family travel, 34 periods so cover needs 2 teachers for a week, suggest send to principal with a Dhruva-drafted cover plan; Ms. Swati Jain, Sick, 5–6 Oct, viral fever, certificate attached, already taken, suggest approve; Mr. Rahul Verma, Casual, Tue 13 Oct, falls in Term 1 exam week with an invigilation duty (Class 10 Science), suggest send to principal or ask him to swap the duty first. Buttons "Approve", "Send to principal", "Decline"; the Dhruva-recommended one is primary. Results: "Approved · Ms. Neha Arora and the coordinator told" (row chip "Approved", "Approved leave goes to the academic coordinator for cover and to HR for the leave register."), "Sent to Ms. Neelam Mehra with your recommendation and the cover plan" (chip "With principal"), "Declined · <name> told" (chip "Declined").
- Meetings (desktop): "Agenda · Thu 15 Oct, 2:30 pm" (1 Term 1 papers: final check before Monday; 2 Class 12 catch-up plan for the week of 2 Nov; 3 Trigonometry: common worksheet for Class 10; 4 Moving 8–C from Mr. Tyagi to Ms. Chawla), "Add", "Send agenda to the team" (toast "Agenda sent to 18 Maths teachers"). "Actions from 17 Sep" with owners and due dates (done ticks). "Resource requests": Geometry kits 30 (18,600 rupees, With exam cell), Graph paper 20 reams (Delivered). "New request": pick What (Geometry kits, Scientific calculators (lab), RD Sharma reference sets, GeoGebra classroom licence) and How many (10, 20, 30, 40), "Send to the academic coordinator" (toast "Request sent to Mrs. Rekha Sinha").

Progress (Desktop: "Progress" tab, sub-tabs Syllabus / Check-ins / Results / Homework · Phone: "Progress" tab, sub-tabs Results / Homework)

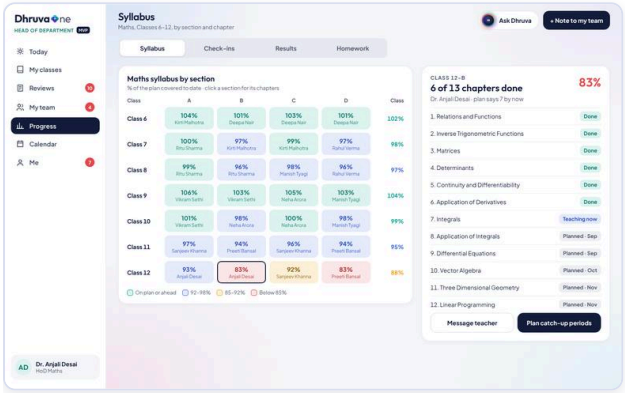

Desktop · Progress

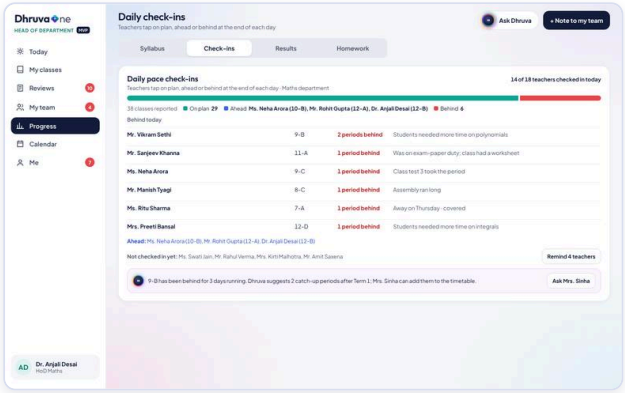

Desktop · Checkins

Phone · Progress

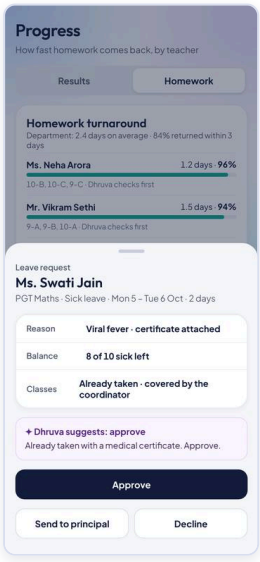

Phone · Homework

- Syllabus (desktop): "Maths syllabus by section: % of the plan covered to date · click a section for its chapters". Grid Classes 6–12 by sections A–D with percentage and teacher name, coloured "On plan or ahead 92–98%", "85–92%", "Below 85%" (Class 12–B and 12–D 83%, Class 12–A 93%, Class 9–A 106%...). Clicking a section shows its chapter list with status (e.g. "CLASS 12–B · 6 of 13 chapters done · Dr. Anjali Desai · plan says 7 by now · 83%": chapters 1–6 Done, "7. Integrals" Teaching now, others "Planned · Sep/Oct/Nov/Jan"). Buttons "Message teacher" (toast "Note sent · it appears in <teacher>'s Inbox in the teacher app") and "Plan catch-up periods" / "Mark as on track" (shows "✓ Catch-up planned").

- Check-ins (desktop; phone shows the same as the Reviews/Team pace line): "Daily pace check-ins... Maths department", "14 of 18 teachers checked in today · 38 classes reported", On plan 29, Ahead (names), Behind 6 with rows (Vikram Sethi 9–B 2 periods, "Students needed more time on polynomials"; Sanjeev Khanna 11–A 1, "Was on exam-paper duty; class had a worksheet"; Neha Arora 9–C; Manish Tyagi 8–C; Ritu Sharma 7–A; Preeti Bansal 12–D), "Not checked in yet: Ms. Swati Jain, Mr. Rahul Verma, Mrs. Kirti Malhotra, Mr. Amit Saxena", "Remind 4 teachers" (toast "Reminder sent · they can check in with one tap from Today"). Dhruva: "9–B has been behind for 3 days running. Dhruva suggests 2 catch-up periods after Term 1; Mrs. Sinha can add them to the timetable." Button "Ask Mrs. Sinha" (becomes "✓ Done", toast "Sent to Mrs. Rekha Sinha with your note").
- Results (both): exam pills Unit test 1 / 2 / 3 / "Term 1 · 30 Oct" (dashed, not yet), "Show change from Unit test 2", "Maths average 64% · school target 65%" (UT1 70%, UT2 67%), bars "Average by section" for Classes 6–12 x A–D with a dashed target line at 65%. "Weakest topics" (Introduction to Trigonometry Class 10 48%, Quadratic Equations 55%, Linear Equations in Two Variables Class 9 57%, Permutations and Combinations Class 11 52%, Continuity and Differentiability Class 12 54%, Comparing Quantities Class 8 59%) with "Plan a revision week for these topics" (toast "Revision worksheets for 6 topics shared with the team for 27–31 Oct"). "Below 40% in Maths: 31 students · Unit test 3 · remedial runs Saturdays 9–10:30 am" with "Add all to remedial" and per-student "Add to remedial" (phone "Remedial").
- Homework (both): "Homework turnaround: Department: 2.4 days on average · 84% returned within 3 days", per teacher days and % (Neha Arora 1.2 d 96%... Sonia Kapoor 5.1 d 52%), tags "Dhruva checks first" or "Not using Dhruva checking yet", Dhruva note recommending a 15–minute GeoGebra/homework-check demo, button "Add to Thursday's meeting" (toast "Added to Thursday's department meeting agenda · both teachers told").
- Rules: HoD sees only own department (Maths average, 31 students vs the coordinator's 46 across subjects); the coordinator sees the whole school and receives "Ask Mrs. Sinha" requests.

Calendar (Desktop: "Calendar" tab · Phone: via Today "Calendar ›")

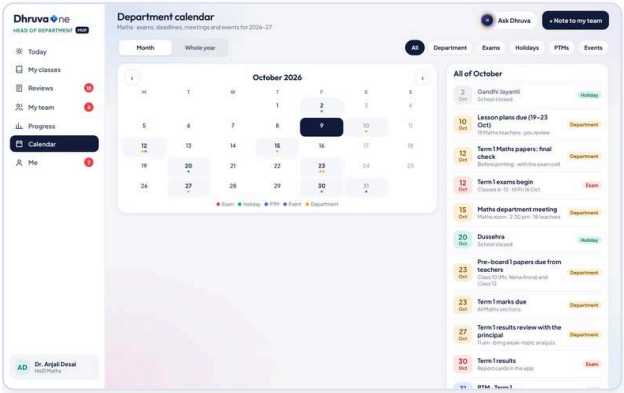

Desktop · Calendar

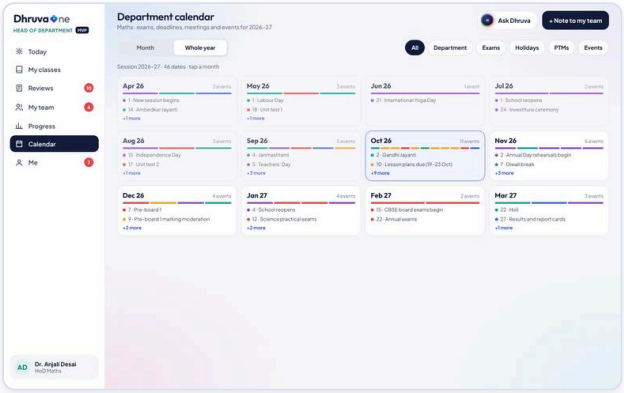

Desktop · Calendar year

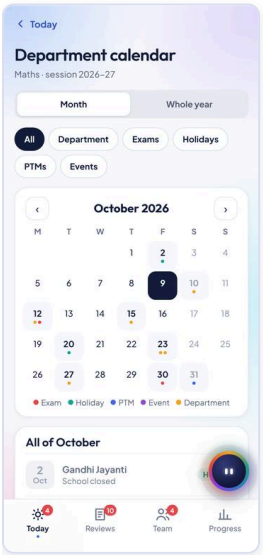

Phone · Calendar

- What it shows: "Department calendar: Maths · exams, deadlines, meetings and events for 2026–27". Segments "Month" / "Whole year" and filters "All, Department, Exams, Holidays, PTMs, Events". October 2026 month grid with a legend (Exam, Holiday, PTM, Event, Department) and the list: 2 Oct Gandhi Jayanti (closed); 10 Oct Lesson plans due (19–23 Oct); 12 Oct Term 1 Maths papers: final check and Term 1 exams begin (till Fri 16 Oct); 15 Oct Maths department meeting, Maths room 2:30 pm, 18 teachers; 20 Oct Dussehra; 23 Oct Pre-board 1 papers due and Term 1 marks due; 27 Oct Term 1 results review with the principal, 11 am, bring weak-topic analysis; 30 Oct Term 1 results (report cards in the app); 31 Oct PTM · Term 1, book a slot in the

app. "Whole year": "Session 2026–27 · 46 dates · tap a month" with 12 month cards (Apr to Mar, e.g. Nov 5 events, Feb 15 CBSE board exams begin).

Me (Desktop: "Me" tab · Phone: avatar "AD", badge 7)

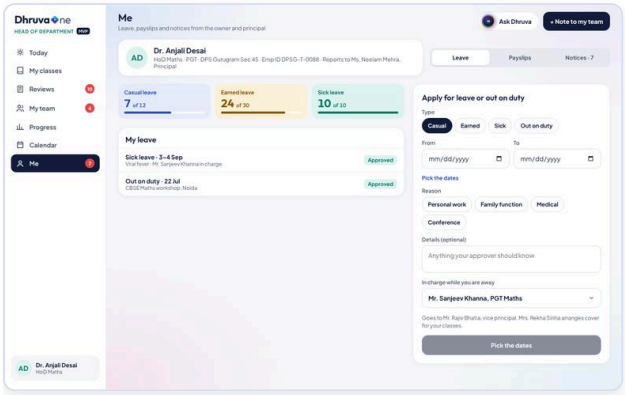

Desktop · Me

- Shows: profile, Leave / Payslips / Notices · 7 tabs. Balances Casual 7 of 12, Earned 24 of 30, Sick 10 of 10. "My leave": Sick leave 3–4 Sep (Mr. Sanjeev Khanna in charge, Approved); Out on duty 22 Jul (CBSE Maths workshop, Noida, Approved). "Apply for leave or out on duty" form (Type Casual/Earned/Sick/Out on duty; From; To; Reason chips; Details; "In charge while you are away": Mr. Sanjeev Khanna, Mrs. Preeti Bansal, Mr. Vikram Sethi). Routing text: "Goes to Mr. Rajiv Bhatia, vice principal. Mrs. Rekha Sinha arranges cover for your classes." (More than 2 days: "Goes to Mr. Rajiv Bhatia, then Ms. Neelam Mehra, because it is more than 2 days.") Payslip (bank account SBI ending 3391; earnings Basic pay, Dearness allowance, House rent allowance, Transport allowance, HoD allowance; deductions Provident fund, Professional tax, TDS) with download PDF and email actions; notices from chairman, group office and principal, some needing "Confirm".

Gaps / differences between desktop and phone

- Phone has 4 tabs (Today, Reviews, Team, Progress); desktop has 7 (adds My classes, Calendar, Me). On phone, My classes is a toggle on Today, Calendar is a link from "Coming up", Me is the avatar.
- Phone Progress offers only Results and Homework; the Syllabus-by-section grid and the Check-ins view are desktop-only (phone shows the pace line in Reviews and Team).
- Meetings, agenda and resource requests are desktop-only. Leave review and teacher detail open as bottom sheets on phone.
- Phone "My classes" note: full teacher screens are on desktop.

ACADEMICS · DESKTOP · PHONE

Exam Cell

Runs the whole exam cycle: question papers (moderate, print, seal), date sheets, seating and invigilation, marks checks, report-card compilation and CBSE board registration.

Who uses it. the exam cell in-charge (sample: Mr. Naveen Chopra, Exam cell in-charge, Emp ID DPSG-T-0201, DPS Gurugram Sec 45, reports to Ms. Neelam Mehra, Principal; deputy Mrs. Usha Tiwari, Mr. Kunal Bose in the cell).

On the following pages:

- Today (Desktop: "Today" · Phone: "Today", badge 8)
- Question papers (Desktop: "Question papers" · Phone: "Papers", badge 12)
- Exam days (Desktop: "Exam days" tab with sub-tabs "Seating and duties" and "Date sheets" · Phone: "Exam days", same two sub-tabs)
- Marks and results (Desktop: "Marks and results" · Phone: "Marks")
- CBSE registration (Desktop: "CBSE registration" sidebar item, after Marks · Phone: "CBSE", badge 22)
- Me (Desktop: "Me" · Phone: avatar "NC", badge 7)

Business summary

The exam cell turns a pile of coordination work into a short, ordered list. Before Term 1 (35 papers, 2,190 students, 42 rooms, starting Mon 12 Oct) the exam cell makes sure every paper has been set, reviewed by the head of department, moderated against its blueprint, printed and sealed in the strongroom. Dhruva generates the date sheet, the room seating charts (two classes per room so neighbours never sit the same paper) and the invigilation roster in seconds, and flags the gaps caused by leave. After the tests Dhruva checks marks for typing errors and odd averages, tells which sections have not entered marks, and compiles totals, grades, ranks and CBSE report cards, which the principal approves before parents see them. For classes 10 and 12 it checks every board registration record against admission data, fixes what it can and asks parents on WhatsApp for the rest, so the CBSE deadline (Tue 20 Oct) is not missed.

Daily story

Fri 9 Oct, "Good morning, Mr. Chopra", "Term 1 starts Monday". Focus card **"8 THINGS NEED YOU · 1 OF 8"**; the first is **"Moderate 9 papers from HoDs"** ("Dhruva checked each against its blueprint: 7 are fine, 2 need a look"), button "Moderate with Dhruva". "Up next": "3 papers not set yet" (Class 8 Science, Class 10 Social science, Class 11 Chemistry, due Sat 12 pm; "Remind setters"), "Seal and log printed papers", "Seating plan for Term 1", "2 invigilation gaps on Monday" (Mr. Vikram Sethi on leave, Mr. Arjun Menon sick; "Fill with Dhruva"), "6 sections haven't entered Unit test 3 marks" (and Dhruva found 3 entries that look wrong; "Remind teachers"), and the CBSE records item. "Later ›" defers, "See all 8 for today · 0 done" lists everything. Each action ticks the list (verified: after "Moderate with Dhruva" the counter changes to "7 THINGS NEED YOU").

Screens

Today (Desktop: "Today" · Phone: "Today", badge 8)

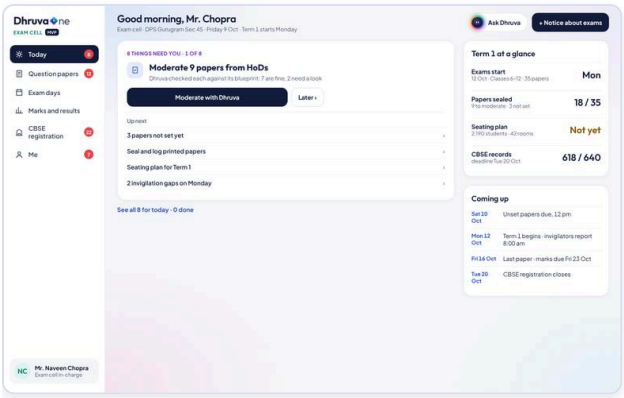

Desktop · Today

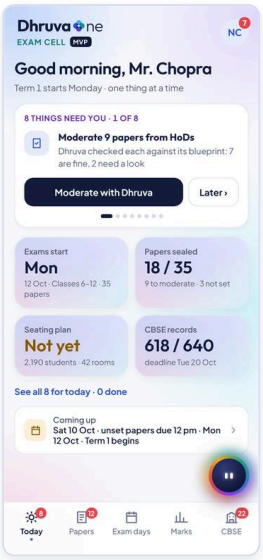

Phone · Today

- What it shows: focus card and "Up next" (desktop); "Term 1 at a glance": "Exams start Mon (12 Oct · Classes 6–12 · 35 papers)", "Papers sealed 18 / 35 (9 to moderate · 3 not set)", "Seating plan Not yet (2,190 students · 42 rooms)", "CBSE records 618 / 640 (deadline Tue 20 Oct)"; "Coming up": Sat 10 Oct unset papers due 12 pm; Mon 12 Oct Term 1 begins, invigilators report 8:00 am; Fri 16 Oct last paper, marks due Fri 23 Oct; Tue 20 Oct CBSE registration closes.
- Functions: "+ Notice about exams" and "Ask Dhruva" in the desktop header; focus action buttons: "Moderate with Dhruva", "Remind setters" (toast "Setters and HoDs reminded"), "Seal and log" (toast "18 papers sealed · strongroom log updated"), "Generate with Dhruva" (seating), "Fill with Dhruva" (invigilators), "Remind teachers" (toast "6 teachers reminded on the app · due Mon 12 Oct"); tiles jump to the respective tab.
- Verified: "Moderate with Dhruva" toasts "7 papers sent to print · 2 sent back with Dhruva's notes".
- Dhruva help: the blueprint check on the 9 papers, ordering of tasks by deadline.

Question papers (Desktop: "Question papers" · Phone: "Papers", badge 12)

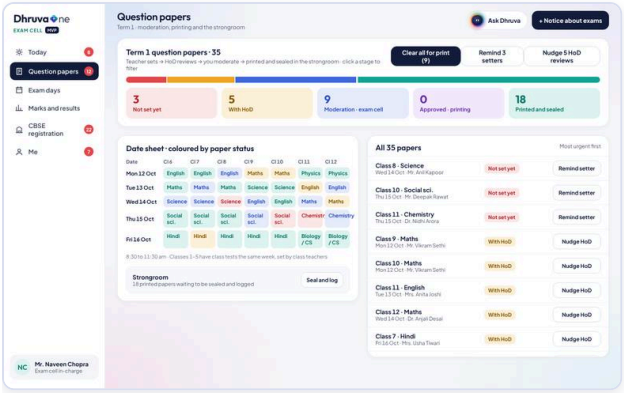

Desktop · Question papers

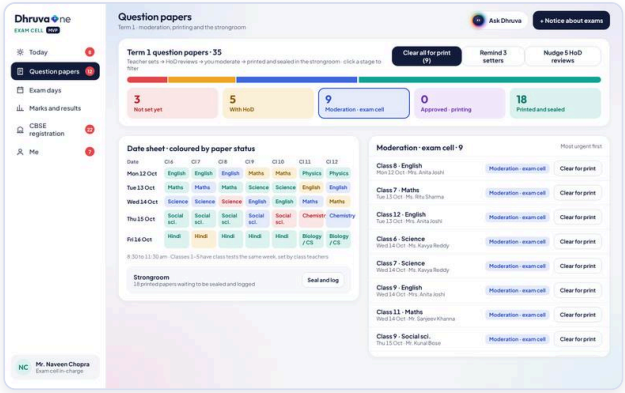

Desktop · Papers filtered

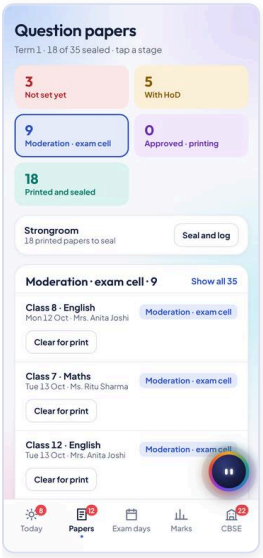

Phone · Papers

- What it shows: "Term 1 question papers · 35" and the pipeline "Teacher sets → HoD reviews → you moderate → printed and sealed in the strongroom · click a stage to filter" with five stage chips and counts: "Not set yet 3", "With HoD 5", "Moderation · exam cell 9", "Approved · printing 0", "Printed and sealed 18" (colours red, amber, blue, purple, teal). "Date sheet · coloured by paper status": grid Mon 12 to Fri 16 Oct by Class 6–12 (Mon English for 6–8, Maths for 9–10, Physics for 11–12; Tue Maths/Science/English; Wed Science/English/Maths; Thu Social sci./Chemistry; Fri Hindi/Biology or CS), footnote "8:30 to 11:30 am · Classes 1–5 have class tests the same week, set by class teachers". "Strongroom: 18 printed papers waiting to be sealed and logged" with "Seal and log". Paper list "All 35 papers · Most urgent first" (e.g. Class 8 Science, Wed 14 Oct, Mr. Anil Kapoor, "Not set yet"; Class 9 Maths Mr. Vikram Sethi "With HoD"; Class 8 English Mrs. Anita Joshi "Moderation · exam cell").
- Functions: stage chips filter the list; per-row action by stage: "Remind setter" (not set; toast "Reminder sent to <setter> and HoD <name>"), "Nudge HoD" (with HoD; toast "Asked <HoD> to..."), "Clear for print" (in moderation; moves it to "Approved · printing", toast "Class 8 English cleared · printing"; counts update 9 to 8 and 0 to 1), "Mark printed" style action (toast "Marked printed and sealed"); bulk "Clear all for print (9)" (disabled when nothing in moderation), "Remind 3 setters", "Nudge 5 HoD reviews"; "Seal and log" (strongroom log). Phone: the same stage chips, a "Moderation · exam cell · 9" section with "Show all 35", and the strongroom card.
- Interactions: tapping a paper row opens the paper reader (questions by section, blueprint) as in the HoD review, which the exam cell uses for moderation (blueprint check compares chapter marks to plan, e.g. Class 10 Maths trigonometry 18 marks vs 12 planned). Dhruva banner on the Today card says 7 are fine and 2 need a look.
- Rules & edge cases: stage order is fixed (teacher, HoD, exam cell, print, sealed); nothing is printed until the exam cell clears it; unset papers have a hard deadline (Sat 10 Oct, 12 pm; Pre-board papers due Fri 30 Oct in the HoD view).

Exam days (Desktop: "Exam days" tab with sub-tabs "Seating and duties" and "Date sheets" · Phone: "Exam days", same two sub-tabs)

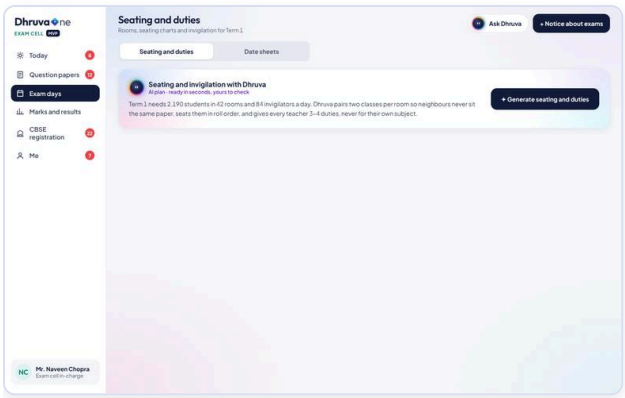

Desktop · Exam days

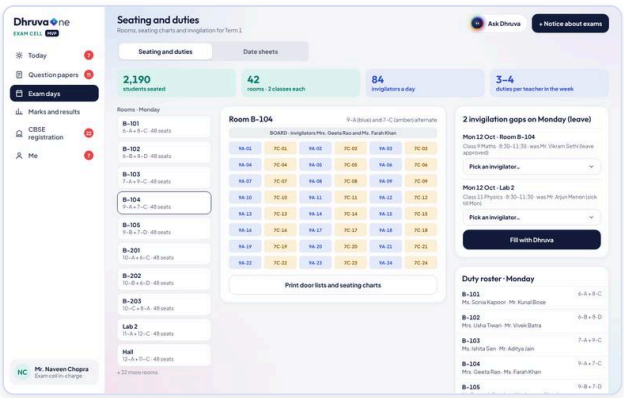

Desktop · Seating result

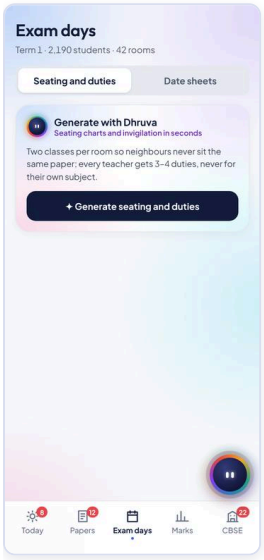

Phone · Exam days

- Seating and duties (verified): before generating, "Seating and invigilation with Dhruva · AI plan · ready in seconds, yours to check", "Term 1 needs 2,190 students in 42 rooms and 84 invigilators a day. Dhruva pairs two classes per room so neighbours never sit the same paper, seats them in roll order, and gives every teacher 3–4 duties, never for their own subject." Button "✦ Generate seating and duties". It then runs four steps (about 4 seconds) and shows summary tiles "2,190 students seated", "42 rooms · 2 classes each", "84 invigilators a day", "3–4 duties per teacher in the week". "Rooms · Monday" list (B-101 6–A + 8–C · 48 seats, B-102 6–B + 8–D, B-103 7–A + 9–C, B-104 9–A + 7–C, B-105 9–B + 7–D, B-201 10–A + 6–C, B-202, B-203, Lab 2 11–A + 12–C, Hall 12–A + 11–C, "+ 32 more rooms"). Clicking a room shows its seating chart: "Room B-104: 9–A (blue) and 7–C (amber) alternate", "BOARD · invigilators Mrs. Geeta Rao and Ms. Farah Khan", seats 9A·01, 7C·01, 9A·02... alternating. "Print door lists and seating charts" (toast "42 door lists and seating charts ready to print (PDF)"). Invigilation gaps: "2 invigilation gaps on Monday (leave)": "Mon 12 Oct · Room B-104 · Class 9 Maths · 8:30–11:30 · was Mr. Vikram Sethi (leave approved)" and "Mon 12 Oct · Lab 2 · Class 11 Physics · was Mr. Arjun Menon (sick till Mon)", each a dropdown "Pick an invigilator..." offering two teachers with no paper that day and their duty counts (e.g. "Ms. Sonia Kapoor · no paper that day · 1 duty", "Mr. Kunal Bose · no paper · 0 duties"); "Fill with Dhruva" fills both (toast "Ms. Sonia Kapoor and Mr. Vivek Batra assigned · told on the app"). After this the teacher-by-room duty roster appears (e.g. B-104 Mrs. Geeta Rao · Ms. Farah Khan).
- Date sheets (verified): shows the published "Term 1 · 12–16 Oct · published" grid. "Draft with Dhruva · AI date sheet · checks the school calendar for clashes · Term 1 is published. Next up: Unit test 4 in December. Dhruva reads the holiday and event calendar, places every paper, and keeps classes away from clashes." Button "Draft a new date sheet" opens: Exam pills "Unit test 4 · Dec" (Dates 7–11 Dec), "Pre-boards · Jan", "Term 2 · Mar" (Dates 7–14 Dec (6 days) shown for the window); Rules "5 of 5 rules on": "Skip holidays and school events in the calendar", "One paper a day for each class", "Maths never on the first day", "Maths and Science not on back-to-back days", "Same subject on the same day across a stage (fewer invigilators)"; buttons "Cancel", "✦ Draft". Running steps: "Reading the calendar: holidays, events, PTMs", "Placing 35 papers across 5 days", "Checking clashes and your rules", "Counting invigilators needed each day". Result tiles: "0 clashes with the calendar", "35 papers placed", "5 / 5 rules met", "86 invigilators a day (max)" with the proposed grid; buttons "Change rules" and "Publish date sheet". Publishing toasts "Unit test 4 date sheet published · teachers, students and parents told" and shows "✓ Published · teachers, students and parents told · Paper setters get their deadlines (Fri 27 Nov) automatically."
- Dhruva help: builds the date sheet, seating and roster; picks invigilators with no paper that day and fewest duties; never assigns a teacher to their own subject.

- Rules & edge cases: Classes 1–5 have class tests set by class teachers, outside the cell's date sheet; leave-driven gaps come from approved leave.

Marks and results (Desktop: "Marks and results" · Phone: "Marks")

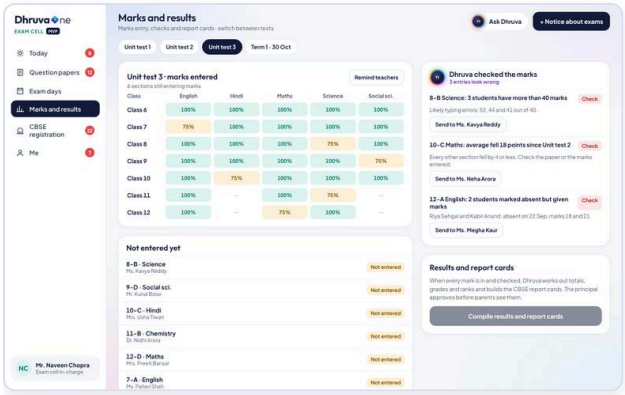

Desktop · Marks and results

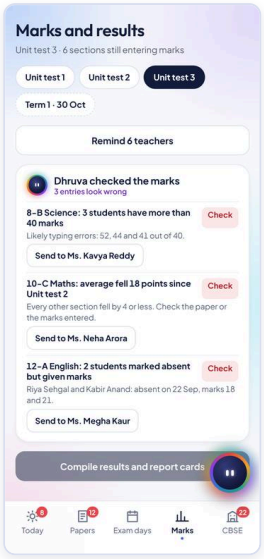

Phone · Marks

- What it shows: exam pills "Unit test 1", "Unit test 2", "Unit test 3", "Term 1 · 30 Oct". "Unit test 3 · marks entered · 6 sections still entering marks" with "Remind teachers" (phone "Remind 6 teachers"). Grid Class 6–12 x English/Hindi/Maths/Science/Social sci. with % of sections entered (Class 7 English 75%, Class 8 Science 75%, Class 9 Social sci. 75%, Class 10 Hindi 75%, Class 11 Science 75%, Class 12 Maths 75%; em dash where the subject does not exist). "Not entered yet" list: 8–B Science Ms. Kavya Reddy, 9–D Social sci. Mr. Kunal Bose, 10–C Hindi Mrs. Usha Tiwari, 11–B Chemistry Dr. Nidhi Arora, 12–D Maths Mrs. Preeti Bansal, 7–A English Ms. Pallavi Shah. "Dhruva checked the marks · 3 entries look wrong": "8–B Science: 3 students have more than 40 marks" (52, 44, 41 out of 40), "10–C Maths: average fell 18 points since Unit test 2" (every other section fell by 4 or less), "12–A English: 2 students marked absent but given marks" (Riya Sehgal and Kabir Anand, absent on 22 Sep, marks 18 and 21), each with "Check" and "Send to <teacher>" (Ms. Kavya Reddy, Ms. Neha Arora, Ms. Megha Kaur); a "Send" for all gives "3 checks sent to teachers". "Results and report cards: When every mark is in and checked, Dhruva works out totals, grades and ranks and builds the CBSE report cards. The principal approves before parents see them." Button "Compile results and report cards".
- Interactions (verified): "Remind teachers" changes the row chips to "Reminded", the table fills to 100% and the banner reads "Teachers reminded · Dhruva will tell you when all are in"; toast "6 teachers reminded on the app · due Mon 12 Oct". "Compile results and report cards" while sections or checks are open toasts "Clear the pending sections and checks first"; when clear it compiles (toast "2,190 report cards compiled · ranks and grades worked out") and then offers sending to the principal ("Sent to Ms. Neelam Mehra for approval before parents see them").
- Rules: Term 1 results are due Fri 30 Oct (marks entered by Fri 23 Oct); parents only see report cards after the principal approves.

CBSE registration (Desktop: "CBSE registration" sidebar item, after Marks · Phone: "CBSE", badge 22)

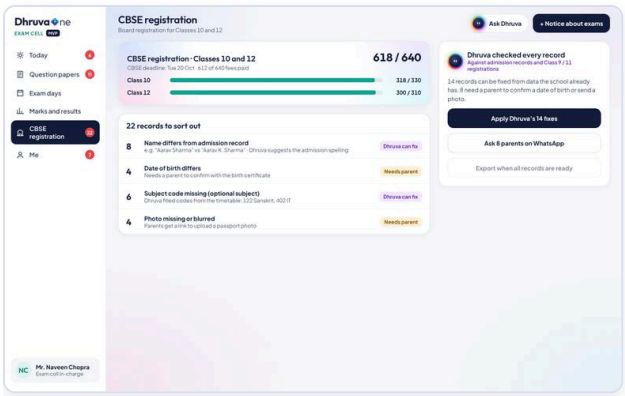

Desktop · Cbse

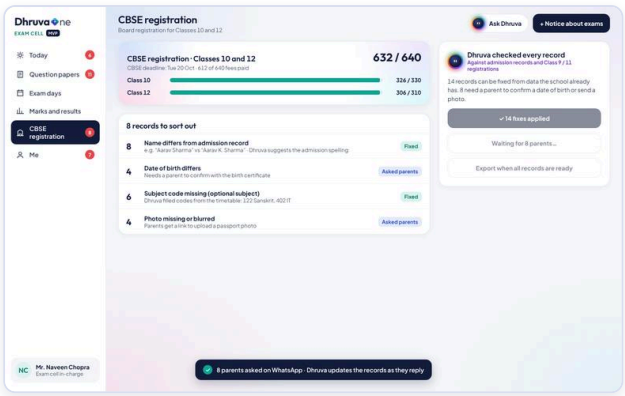

Desktop · Cbse asked

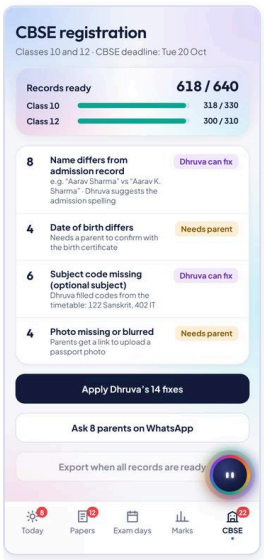

Phone · CBSE

- What it shows: "CBSE registration · Classes 10 and 12 · CBSE deadline: Tue 20 Oct · 612 of 640 fees paid". Progress "Records ready 618 / 640" (Class 10 318 / 330, Class 12 300 / 310), "22 records to sort out". Issue cards with counts and handler: "8 Name differs from admission record (e.g. “Aarav Sharma” vs “Aarav K. Sharma”, Dhruva suggests the admission spelling), Dhruva can fix"; "4 Date of birth differs (needs a parent to confirm with the birth certificate), Needs parent"; "6 Subject code missing (optional subject), Dhruva filled codes from the timetable: 122 Sanskrit, 402 IT, Dhruva can fix"; "4 Photo missing or blurred (parents get a link to upload a passport photo), Needs parent". Dhruva note: "Dhruva checked every record · Against admission records and Class 9 / 11 registrations · 14 records can be fixed from data the school already has. 8 need a parent to confirm a date of birth or send a photo."
- Functions (verified): "Apply Dhruva's 14 fixes" (toast "14 records corrected from admission and timetable data"; counts become 632 / 640, Class 10 326 / 330, Class 12 306 / 310; cards show "Fixed"; button "✓ 14 fixes applied"). "Ask 8 parents on WhatsApp" (toast "8 parents asked on WhatsApp · Dhruva updates the records as they reply"; button "Waiting for 8 parents..."; cards show "Asked parents"; when replies arrive, "All 8 parents replied · records updated"). "Export when all records are ready" (disabled until clear; premature press toasts "Clear the pending sections and checks first"; when ready toasts "CBSE registration file exported · upload it on the CBSE portal").
- Rules: export is a file to upload on the CBSE portal (no direct portal integration shown); fees paid count is displayed beside the deadline.

Me (Desktop: "Me" · Phone: avatar "NC", badge 7)

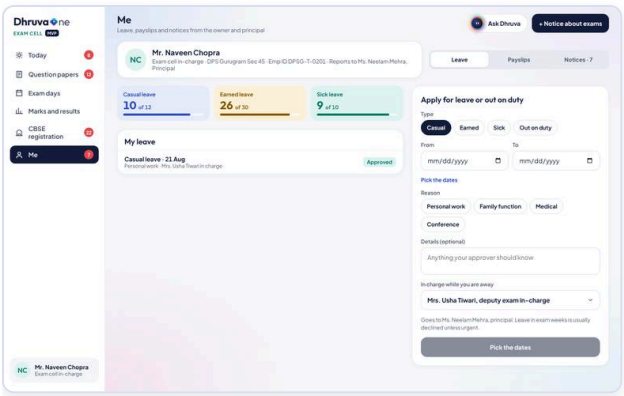

Desktop · Me

- Shows: Leave (Casual 10 of 12, Earned 26 of 30, Sick 9 of 10), "My leave" (Casual 21 Aug, Mrs. Usha Tiwari in charge, Approved), apply form with "In charge while you are away": Mrs. Usha Tiwari (deputy exam in-charge), Mr. Kunal Bose (exam cell), Mr. Rajiv Bhatia (vice principal); routing text "Goes to Ms. Neelam Mehra, principal. Leave in exam weeks is usually declined unless urgent."; Payslips; Notices · 7 from the chairman, group office ("Term 1 exams: conduct and invigilation: printed and sealed by Saturday 10 October") and principal ("Term 1 exam duty roster": swaps via Mrs. Rekha Sinha).

Gaps / differences between desktop and phone

- Phone has 5 tabs (Today, Papers, Exam days, Marks, CBSE) and Me via avatar; desktop has the sidebar with Today, Question papers, Exam days, Marks and results, CBSE registration, Me and the header "+ Notice about exams", "Ask Dhruva".
- Desktop Question papers shows the coloured date-sheet grid and the full 35-paper list; phone shows stage chips, the strongroom card and a moderation list with "Show all 35".
- Desktop Today has the "Term 1 at a glance" and a longer Coming-up list; phone has compact tiles.
- I did not exercise the phone seating and date-sheet flows individually (the screens and buttons match the desktop ones), nor "Notice about exams".

ACADEMICS · DESKTOP · PHONE

School Counsellor

Handles teacher referrals, one-to-one and group sessions with private notes, quiet check-ins for students who may be struggling, Class 10 stream guidance and Class 12 plans after school, and parent workshops.

Who uses it. the school counsellor (sample: Ms. Ritika Bhalla, School counsellor, DPS Gurugram Sec 45, Emp ID DPSG-S-0310, reports to Ms. Neelam Mehra, Principal; backed up by Mr. Sameer Arora, special educator).

On the following pages:

- Today (Desktop: "Today" · Phone: "Today", badge 5)
- My students (Desktop: "My students" · Phone: "Students", badge 3)
- Sessions (Desktop: "Sessions" · Phone: "Sessions")
- Career guidance (Desktop: "Guidance" tab, segment "Career guidance" · Phone: "Guidance" tab, segment "Career guidance")
- Programmes (Desktop: "Guidance" > "Programmes" · Phone: "Guidance" > "Programmes")
- Me (Desktop: "Me" · Phone: avatar "RB", badge 7)

Business summary

The counsellor's job is sensitive: students, parents and teachers must trust that what is said in a session stays private. DhruvaOne is built around that. Every screen carries the line "Session notes are private to you. Teachers and parents only see what you choose to share." Teachers refer students from their own screens; Dhruva sorts the referrals, finds free periods for first sessions and books them with a single tap, telling the student privately. Dhruva also watches attendance, marks and teacher notes and quietly suggests students who may need a check-in, but the counsellor always decides. After each session the counsellor taps a few words and Dhruva drafts the private note. For Class 10 the interest survey plus marks produces a stream suggestion (students and parents decide), and for Class 12 the plans after school (CUET, JEE, NEET, abroad) are tracked. Parent workshops and the board-year session are organised with a ready-written invite sent on WhatsApp.

Daily story

Fri 9 Oct. "Good morning, Ms. Bhalla" with the focus card **"5 THINGS NEED YOU · 1 OF 5"**: **"3 new referrals from teachers"** (Aditya Rawat 11–B, Ananya Kapoor 7–C, Vihaan Malik 9–A; "Dhruva found free slots for each"), button "Book first sessions" (and "Later ›"). Next: "Dhruva noticed 4 students who may need a check-in" ("Attendance and marks both dropping · a suggestion, you decide", "Review"); "3 sessions today · 3 notes to write" ("Tap a few words after each session; Dhruva drafts the private note", "Open sessions"); "62 Class 10 students haven't done the interest survey" ("Needed for stream choice · reports go to parents in November", "Remind students"); "Invite parents to the board-year session" ("Sat 7 Nov · parents of Classes 10 and 12 · Dhruva wrote the invite", "Send invites"). "See all 5 for today · 0 done" expands the list and counts completions.

Screens

Today (Desktop: "Today" · Phone: "Today", badge 5)

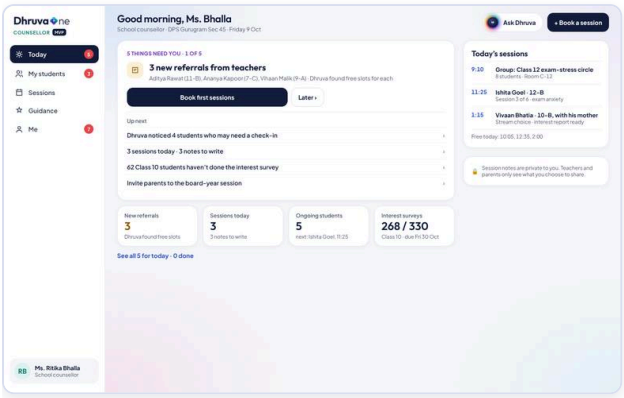

Desktop · Today

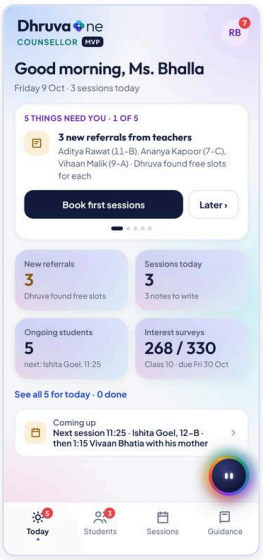

Phone · Today

- What it shows: focus card; four tiles "New referrals 3 (Dhruva found free slots)", "Sessions today 3 (3 notes to write)", "Ongoing students 5 (next: Ishita Goel, 11:25)", "Interest surveys 268 / 330 (Class 10 · due Fri 30 Oct)"; desktop also "Today's sessions" (9:10 Group: Class 12 exam-stress circle, 8 students, Room C-12; 11:25 Ishita Goel 12–B, session 3 of 6, exam anxiety; 1:15 Vivaan Bhatia 10–B, with his mother, stream choice, interest report ready) and "Free today: 10:05, 12:35, 2:00", plus the privacy line. Phone has a "Coming up" line: "Next session 11:25 · Ishita Goel, 12–B · then 1:15 Vivaan Bhatia with his mother".
- Functions: "Ask Dhruva" and "+ Book a session" (desktop header; the latter goes to My students to pick a student and slot); focus buttons "Book first sessions", "Review", "Open sessions", "Remind students", "Send invites"; tiles open My students, Sessions or Guidance; "Later ›"; "See all 5 for today".
- Interactions and messages (verified in code): "Book first sessions" books all three referrals in free periods, toast "3 first sessions booked in free periods · students told privately" and the card becomes "Referrals booked · First sessions booked · students told privately". "Remind students" toasts "62 students reminded on the app". "Send invites" toasts "Invite sent to 1,280 parents on WhatsApp" and the card reads "Board-year parent session: invites sent".
- Dhruva help: finds free slots, spots students for check-ins, drafts notes and invites.
- Rules: students are told privately; nothing is announced to the class or teachers.

My students (Desktop: "My students" · Phone: "Students", badge 3)

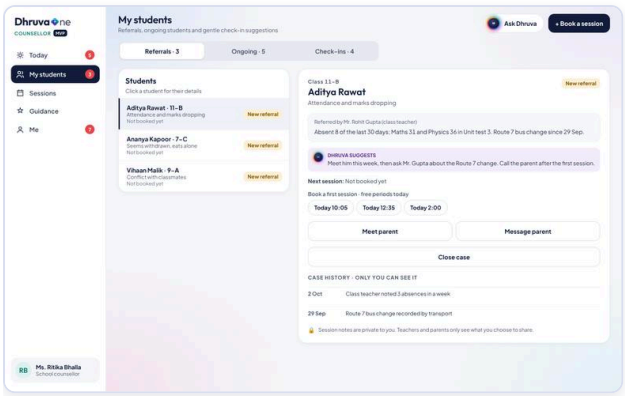

Desktop · My students

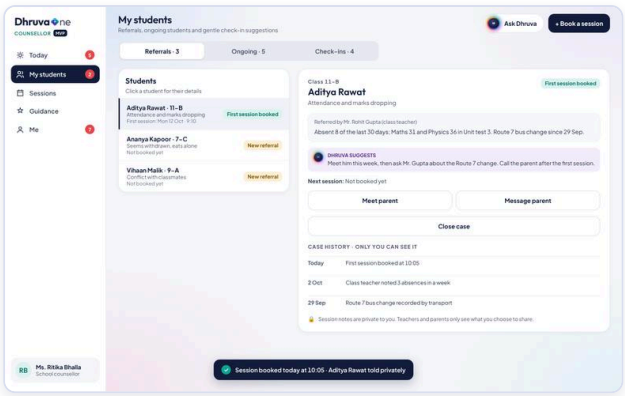

Desktop · Slot booked

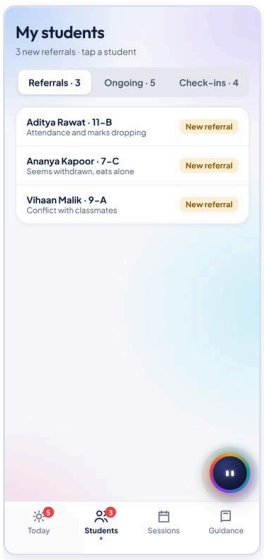

Phone · Students

Phone · Students ongoing

- What it shows: three segments "Referrals · 3", "Ongoing · 5", "Check-ins · 4". Referrals (status "New referral" or, once booked, "First session booked"): Aditya Rawat 11–B "Attendance and marks dropping" (referred by Mr. Rohit Gupta, class teacher); Ananya Kapoor 7–C "Seems withdrawn, eats alone" (referred by Ms. Kavya Reddy; quieter since August, joined from another city in April); Vihaan Malik 9–A "Conflict with classmates" (referred by Mr. Vikram Sethi; two playground incidents this month, parents not yet informed). Ongoing (status "Ongoing", with next session): Ishita Goel 12–B exam anxiety (self-referred, Today 11:25, session 3 of 6); Vivaan Bhatia 10–B marks fell from 72% to 41%, unsure about stream choice (referred by Ms. Neha Arora, mother asked too; Today 1:15 with his mother; interest survey leans to design and Maths while parents expect Science PCB); Sara Khan 9–C settling in after a school change (Mon 12 Oct 10:05); Kabir Singh 8–B family going through a hard time (from accounts and class teacher; "50% fee concession for Term 2 is with the owner for approval"; Thu 15 Oct weekly check-in); Tanya Gill 12–A college applications (Tue 13 Oct 12:35, CUET registration done).
- Student detail (right panel on desktop; bottom sheet on phone): name, class, reason, referrer, context text, **"DHRUVA SUGGESTS"** (for Aditya: "Meet him this week, then ask Mr. Gupta about the Route 7 change. Call the parent after the first session."; Ananya: "Start with a relaxed chat in a free period. No parent call yet."; Vihaan: "Hear each child separately first. Tell parents after the first session."; Ishita: "Keep the plan. Two more sessions before the pre-boards, and add a mock-test routine."; Vivaan: "Show him the interest survey today and ask his mother to see it before choosing Science."), "Next session", and **"CASE HISTORY · ONLY YOU CAN SEE IT"** (e.g. Aditya: 2 Oct class teacher noted 3 absences in a week; 29 Sep Route 7 bus change recorded by transport; "Absent 8 of the last 30 days; Maths 31 and Physics 36 in Unit test 3").
- Functions: choose a free slot "Today 10:05", "Today 12:35", "Today 2:00" (verified: toast "Session booked today at 10:05 · Aditya Rawat told privately", status becomes "First session booked"; history adds "First session booked at 10:05"); "Meet parent" (offers "Mon 12 Oct · 10:05", "Tue 13 Oct · 12:35", "Wed 14 Oct · 2:00"; toast "Parent of <name> invited for <slot> · you can add the counsellor note afterwards"; history shows the parent meeting); "Message parent" (toast "Message to <name>'s parent drafted · you review before it goes"); "Close case" (toast "Case closed · you can reopen it any time", status Closed).
- Check-ins tab (verified): "Students who may need a check-in · Dhruva watches attendance, marks and teacher notes · you decide": Rohan Tiwari 12–A (attendance 71.8% falling since Aug, Maths 32, Physics 30); Rhea Dhillon 12–C (absent 9 of the last 30 days, marks down in 3 subjects); Karan Chauhan 11–A (attendance 74.1%, two teachers noted he seems tired); Mehak Jain 9–A (marks down in 2 subjects, frequent sick-room visits). Each has "Not now" (chip "✓ Not needed for now") and "Book check-in" (toast "Quiet check-in booked with <name> for Monday"; chip "✓ Check-in booked · Mon").

- Rules & edge cases: parents are told only after the first session unless the counsellor chooses otherwise (per Dhruva's advice); case history is visible to the counsellor only.

Sessions (Desktop: "Sessions" · Phone: "Sessions")

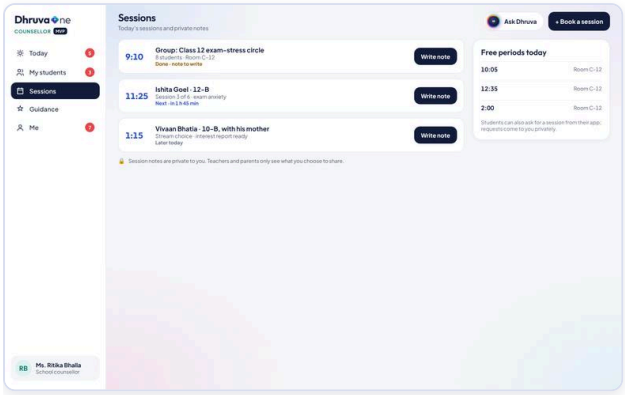

Desktop · Sessions

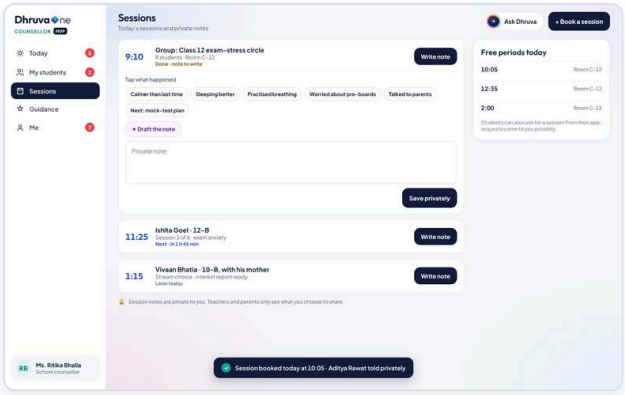

Desktop · Note open

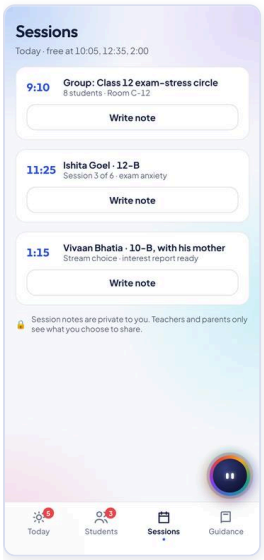

Phone · Sessions

- What it shows: "Sessions: Today's sessions and private notes". Timeline: 9:10 Group: Class 12 exam-stress circle (8 students, Room C-12; status "Done · note to write"); 11:25 Ishita Goel (status "Next · in 1 h 45 min"); 1:15 Vivaan Bhatia, with his mother ("Later today"). "Free periods today": 10:05, 12:35, 2:00 (Room C-12). Footer "Students can also ask for a session from their app; requests come to you privately."
- Functions (verified): "Write note" opens "Tap what happened" with tag pills "Calmer than last time", "Sleeping better", "Practised breathing", "Worried about pre-boards", "Talked to parents", "Next: mock-test plan" (selected pills show a tick); "✦ Draft the note" (toast "Dhruva drafted a private note from your tags") produces an editable text such as "Group of 8 from Class 12. Sleeping better. Agreed to meet again next week. Nothing to share with teachers."; "Save privately" (toast "Note saved · only you can see it"; the session shows "✓ Note saved (private)"; the Today card "3 sessions today · N notes to write" counts down and ends as "Today's notes written").
- Dhruva help: drafts the note from the tags only; the counsellor edits before saving.
- Rules: notes are never shared automatically; "Nothing to share with teachers" is the default wording.

Career guidance (Desktop: "Guidance" tab, segment "Career guidance" · Phone: "Guidance" tab, segment "Career guidance")

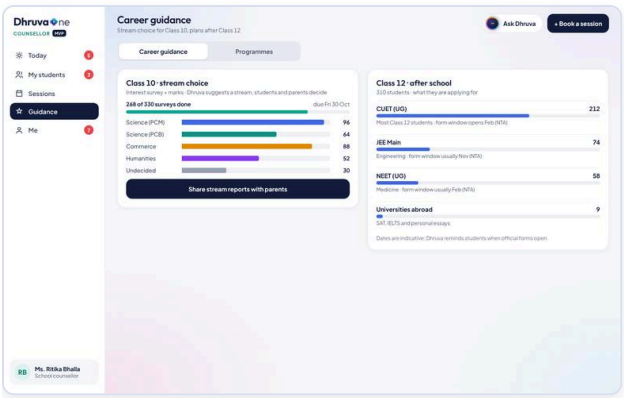

Desktop · Guidance

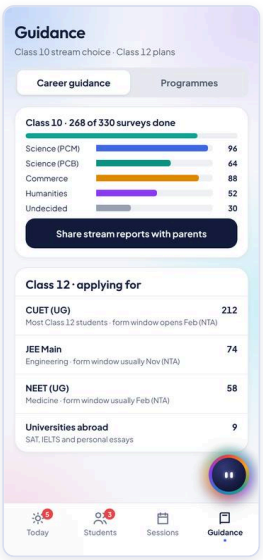

Phone · Guidance

- What it shows: "Class 10 · stream choice: Interest survey + marks · Dhruva suggests a stream, students and parents decide", "268 of 330 surveys done · due Fri 30 Oct", stream split bars: Science (PCM) 96, Science (PCB) 64, Commerce 88, Humanities 52, Undecided 30. "Class 12 · after school: 310 students · what they are applying for": CUET (UG) 212 (form window opens Feb, NTA), JEE Main 74 (engineering, window usually Nov, NTA), NEET (UG) 58 (medicine, window usually Feb, NTA), Universities abroad 9 (SAT, IELTS and personal essays). Footer "Dates are indicative; Dhruva reminds students when official forms open."
- Functions: "Share stream reports with parents" (toast "268 stream reports shared with parents · Dhruva added a note for each"; button becomes "✓ Reports shared with parents"); segment switch to Programmes.
- Rules: stream suggestions are advisory; reports reach parents only when the counsellor presses share (planned for November).

Programmes (Desktop: "Guidance" > "Programmes" · Phone: "Guidance" > "Programmes")

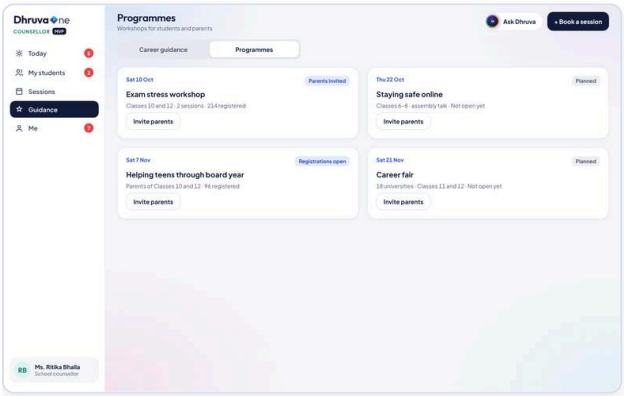

Desktop · Programmes

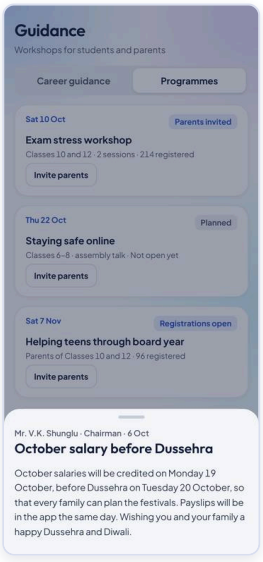

Phone · Programmes

- What it shows: "Workshops for students and parents": Sat 10 Oct Exam stress workshop (Classes 10 and 12, 2 sessions, 214 registered, "Parents invited"); Thu 22 Oct Staying safe online (Classes 6–8, assembly talk, "Planned", not open yet); Sat 7 Nov Helping teens through board year (parents of Classes 10 and 12, 96 registered, "Registrations open"); Sat 21 Nov Career fair (18 universities, Classes 11 and 12, "Planned").
- Functions: "Invite parents" per programme (toast "Invites sent for “<name>”" or "Invite sent to 1,280 parents on WhatsApp" for the board-year session); Dhruva writes the invite text.

Me (Desktop: "Me" · Phone: avatar "RB", badge 7)

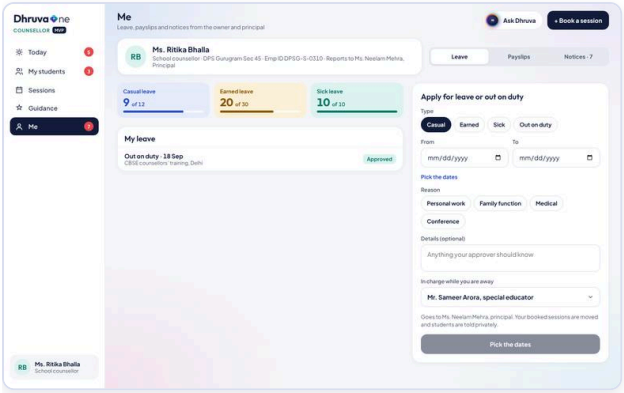

Desktop · Me

- Shows: profile and Leave / Payslips / Notices · 7. Balances Casual 9 of 12, Earned 20 of 30, Sick 10 of 10; "My leave": Out on duty 18 Sep (CBSE counsellors' training, Delhi, Approved). Apply form with "In charge while you are away": Mr. Sameer Arora (special educator) and Mrs. Rekha Sinha (academic coordinator). Routing: "Goes to Ms. Neelam Mehra, principal. Your booked sessions are moved and students are told privately."

Gaps / differences between desktop and phone

- Phone has 4 tabs (Today, Students, Sessions, Guidance); Me opens from the avatar. Desktop has 5 sidebar items plus Me and the header "+ Book a session" and "Ask Dhruva".
- Desktop shows "Today's sessions" and a free-slot line on Today and a side detail panel next to the student list; phone uses a "Coming up" line and a bottom sheet for the student detail.
- Phone Students tab shows Ongoing by default in the capture; Referrals and Check-ins are reachable from the same segment control. I did not exercise the phone student sheet buttons individually (same engine as desktop).

ACADEMICS · DESKTOP · PHONE

Teacher

The teacher's day on one page: take attendance, enter marks from a photo, check homework Dhruva already marked, answer parents, and prepare papers, notes and lesson plans that Dhruva drafts and the teacher only edits and sends.

Who uses it. Subject and class teachers (sample: Ms. Neha Arora, TGT Maths, class teacher of 10–C, Emp ID DPSG-T-0231, DPS Gurugram Sec 45; reports to Dr. Anjali Desai, HoD Maths). Works with the HoD (Dr. Desai), the academic coordinator (Mrs. Rekha Sinha), the counsellor (Ms. Ritika Bhalla), the principal (Ms. Neelam Mehra), the exam cell, students and parents.

On the following pages:

- Today (Desktop: "Today" with count 8 · Phone: "Today" tab)
- Inbox (Desktop: "Inbox" · Phone: "Inbox" tab)
- Calendar (Desktop: "Calendar" · Phone: "Calendar" tab)
- Timetable (Desktop: "Timetable" · Phone: week shown through "Week ›" on Today)
- My students (Desktop: MY CLASSES > "My students" · Phone: "Students" tab)
- Marks (Desktop: MY CLASSES > "Marks" · Phone: opened from Today, Prep tile "Marks" or the P4 period action)
- Attendance (Desktop: MY CLASSES > "Attendance" · Phone: pushed screen "Attendance · 10–C")
- Homework (Desktop: PREP > "Homework" · Phone: reached from Today task "10–C homework · checked by Dhruva" and Prep tile "Homework · Check and return")
- Question papers (Desktop: PREP > "Question papers" · Phone: Prep > "Question paper")
- Notes for students (Desktop: PREP > "Notes for students" · Phone: Prep > "Notes for students")
- Lesson plans (Desktop: PREP > "Lesson plans" · Phone: Prep > "Lesson plan")
- Remedial (Desktop: MY CLASSES > "Remedial" · Phone: reached from Students "Review remedial suggestions" or Prep tile "Remedial · 6 suggested")
- Me (Desktop: "Me" with count · Phone: avatar "NA", screen "Me")
- Switch profile (phone only)
- Ask Dhruva (Desktop: header button · Phone: orb)

Business summary

Teachers lose hours to paperwork that does not teach anyone: registers, marks entry, homework checking, parent messages, lesson plans and question papers. DhruvaOne lets the teacher open one screen that shows "what needs me first" and "what is my next period". Attendance is a single tap per absent child with parents told on WhatsApp automatically. Marks are entered by taking one photo of the register page, with Dhruva reading all marks and flagging only the doubtful ones. Homework pages are checked against the teacher's answer key and the teacher looks only at the few Dhruva was unsure about. Question papers, revision notes and lesson plans are drafted by Dhruva to the school's pattern and the HoD's blueprint, then edited by the teacher and routed to the HoD and exam cell. Students who may need help are surfaced from tests, homework and attendance, and the teacher chooses who goes to Saturday remedial or to the counsellor. For the school this means faster, cleaner records, less chasing, and one trail from the teacher to the HoD, coordinator, counsellor and parents.

Daily story (one thing at a time)

Friday 9 October. "Good morning, Ms. Arora · Friday 9 October · 6 classes and 1 cover · Term 1 exams start Monday." Two cards sit side by side.

- **Left: "1 OF 3 · 8 THINGS TODAY"** (phone: "7 things need you today"). First card: "Mark attendance · 10–C: P1 at 8:00 · Ira and Dev already marked absent from parents' notes" with button "Take attendance" and "Later ›". Below, "Up next": "Revision notes before Monday's exam", "Class test 3 marks · 9–C". Link "See all 8 for today · 0 done" expands the full list: Mark attendance 10–C; Revision notes before Monday's exam ("Review and share"); Class test 3 marks 9–C ("Enter marks"); Lesson plan for 19–23 Oct, due tomorrow ("Review and send"); 6 students may need remedial classes ("Review"); Dr. Desai's feedback on your plan ("Read feedback"); 10–C homework checked by Dhruva, "7 need your look · 27 ready to return" ("Check homework"); Pre-

board 1 paper, Class 10, due Fri 23 Oct ("Open"). When the teacher is in a free period the card suggests a good-time task ("Good time for: …"). When nothing is pending: "All done for today".

- **Right: the next-period card** (dark): "NEXT · P1 · 8:00 · 10–C · Maths · Room 204" with the action for that period, "Then P2 · free at 8:45", and a period strip P1 to P8 (P1 10–C 8:00, P2 Free 8:45, P3 10–B 9:30, P4 9–C 10:15, P5 Free 11:20, P6 10–C 12:05, P7 cover 8–D 12:50, P8 9–C 1:35, then "Done 2:20"). The card's action changes with the period: P1 "Take attendance"; P3 "Open today's lesson"; P4 "Snap class test 3 marks" ("Collect class test 3 · Dhruva reads the mark sheet"); P6 "Share revision notes"; P7 "Open the cover worksheet" (cover for Mr. Anil Kapoor on leave, 8–D Science, assigned by Mrs. Sinha, worksheet on food chains, 30 minutes); P8 "Take attendance" for 9–C; after school "Do the 20–second check".
- **End–of–day check · 20 seconds** ("After P8 · Dhruva has guessed where each class is · Open ›"): for 10–C, 10–B and 9–C the teacher confirms "On plan", "Behind" or "Ahead" (Dhruva's guess: 10–C on plan, 10–B 1 period ahead, 9–C 1 period behind), and if behind picks a reason (Students needed more time, Event or assembly, I was away, Test or exam), then sends: "Sent · Dr. Desai and Mrs. Sinha can see where each class is".
- **Your day** list shows every period with room and the one useful note ("collect class test 3", "revision before Monday's exam"), and "See the week" opens the weekly grid.

Screens

Today (Desktop: "Today" with count 8 · Phone: "Today" tab)

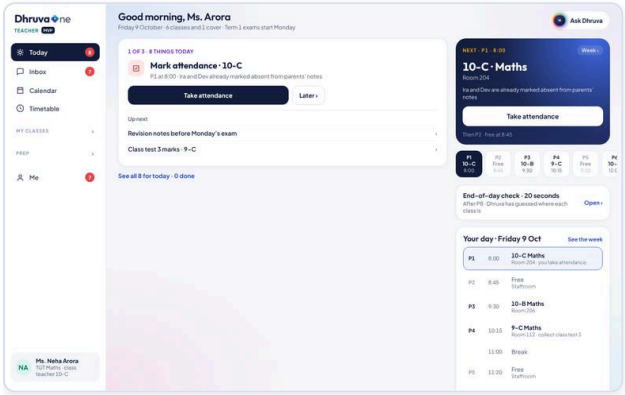

Desktop · Today

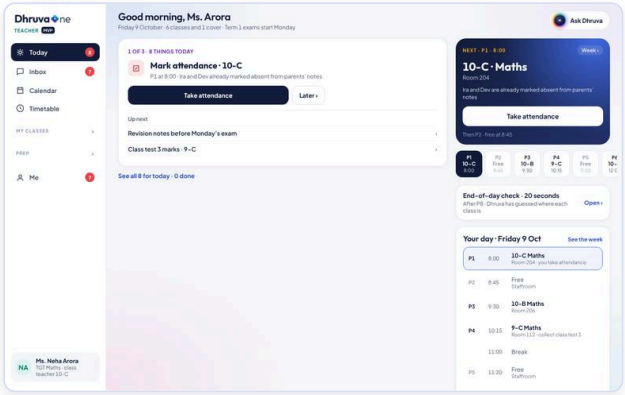

Desktop · Start

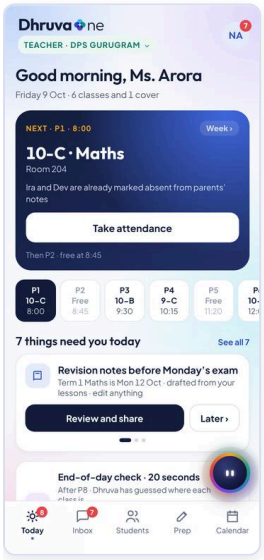

Phone · Today

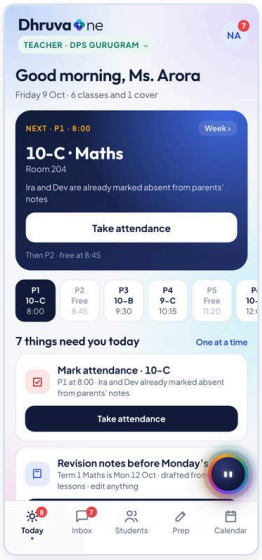

Phone · Today all tasks

- What it shows: see Daily story. Phone header "Dhruva ne · TEACHER · DPS GURUGRAM ⌄" with avatar "NA" (notices count 7) and a bottom tab bar: Today (8), Inbox (7), Students, Prep, Calendar. Desktop left sidebar: Today (8), Inbox (7), Calendar, Timetable, MY CLASSES group (My students, Marks, Attendance, Remedial), PREP group (Homework, Question papers, Notes for students, Lesson plans), Me (7); profile chip "Ms. Neha Arora · TGT Maths · class teacher 10–C".
- Functions: task action button (opens the related screen); "Later ›" (moves to the next of the top three); "See all N / One at a time" toggle (verified); the period strip chips (tap a period to preview its card); "Week ›" and "See the week"; "Open ›" on the end–of–day check; "Ask Dhruva" (desktop header; phone orb); bell/avatar (phone) opens Me.
- Interactions (verified): "Later ›" on the first card shows the next task ("Class test 3 marks · 9–C"; revision notes move on). Completing a task (e.g. submit attendance) changes its card to a done state ("Attendance marked · 10–C · 35 present · 3

absent · parents told") and the badge and "0 done" counters update. Opening the first-period card button "Take attendance" jumps to the attendance screen. For the cover period the button flashes "Worksheet opened · 8–A will get it on the board" (shown as sample). For P8 the button flashes "9–C register opened · everyone present except Rohan".

- Dhruva help: ranks the tasks, pre-fills attendance from parents' notes, drafts notes, plan, paper and replies, and guesses the end-of-day pace.
- Rules & edge cases: Today's tasks do not repeat the task for the period currently shown (it avoids the same item twice). Phone shows 7 tasks, desktop 8 (the pre-board paper task appears on desktop).

Inbox (Desktop: "Inbox" · Phone: "Inbox" tab)

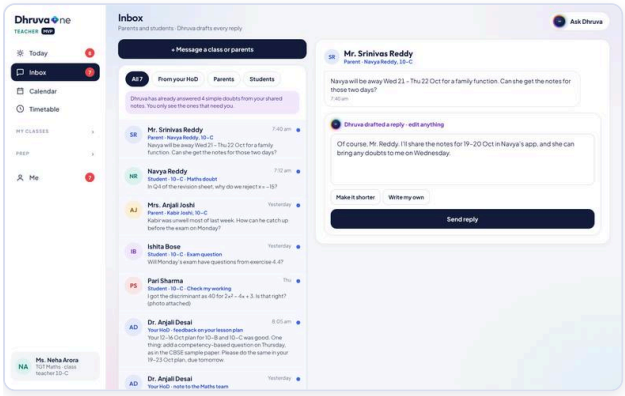

Desktop · Inbox

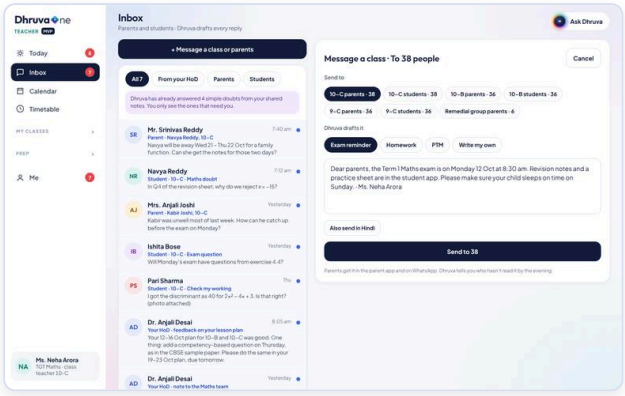

Desktop · Message composer

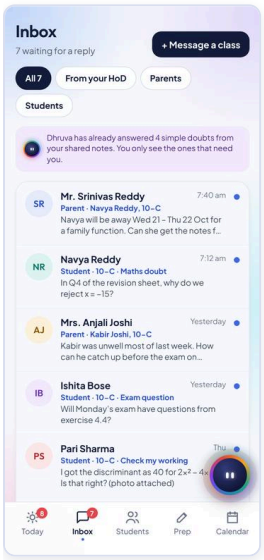

Phone · Inbox

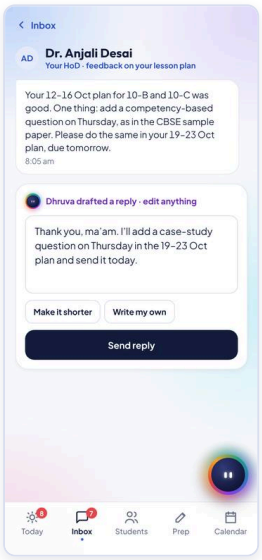

Phone · Inbox thread

- What it shows: "Parents and students · Dhruva drafts every reply". Header "7 waiting for a reply". Filters "All 7", "From your HoD", "Parents", "Students". Note: "Dhruva has already answered 4 simple doubts from your shared notes. You only see the ones that need you." Messages: Mr. Srinivas Reddy (parent of Navya, 10–C, away Wed 21 – Thu 22 Oct, wants notes); Navya Reddy (student maths doubt: why reject x = –15); Mrs. Anjali Joshi (parent of Kabir, unwell, how to catch up); Ishita Bose (will exam have exercise 4.4); Pari Sharma (check my working, photo attached); Dr. Anjali Desai (HoD feedback on lesson plan: add a competency-based question on Thursday, due tomorrow); Dr. Desai (department meeting Thu 15 Oct 2:30 pm). A "Messages you sent" list shows read counts ("Revision notes are in the app · 10–C students · Yesterday · 34 of 38 read"; "Unit test 2 marks are out · 10–B and 10–C parents · Mon · 69 of 74 read").
- Functions: open a message (desktop right pane, phone pushed thread screen). Thread shows the message and "Dhruva drafted a reply · edit anything" in an editable box with three buttons "Make it shorter", "Write my own", "Send reply". "+ Message a class or parents" (phone: "+ Message a class") opens the composer.
- Interactions: "Make it shorter" cuts the draft to its first sentence; "Write my own" clears the box; "Send reply" with an empty box flashes "Write a reply first"; otherwise flashes "Sent to <name>", marks the thread replied (unread dot disappears, header count and the Inbox badge fall, e.g. 7 to 6) and shows the sent text with "Just now · sent". Replying to Dr. Desai also completes the Today task "Dr. Desai's feedback on your plan" (shown as "Replied to Dr. Desai"). Drafts are: to the parent "Of course, Mr. Reddy. I'll share the notes for 19–20 Oct in Navya's app…"; to the student "Because x is the speed of the train… check that your answer makes sense"; to Pari "Close! $b^2 - 4ac = 16 - 24 = -8$…"; to the HoD "Thank you, ma'am. I'll add a case-study question on Thursday…".
- Composer ("Message a class or parents"): recipient chips with head count: "10–C parents · 38", "10–C students · 38", "10–B parents · 36", "10–B students · 36", "9–C parents · 36", "9–C students · 36", "Remedial group parents · 6" (toggle several; "To N

people" updates); templates "Exam reminder", "Homework", "PTM", "Write my own" fill an editable message (e.g. "Dear parents, the Term 1 Maths exam is on Monday 12 Oct at 8:30 am…"); toggle "Also send in Hindi" (becomes "✓ Also sending in Hindi"); button "Send to N". Errors: "Pick at least one group", "Write the message first". Success: toast "Sent to N people · Dhruva tells you tonight who hasn't read it"; the Inbox shows it at the top of "Messages you sent" with "0 of N read".

- Dhruva help: auto-answers simple doubts from the teacher's shared notes; drafts every reply; tells the teacher tonight who has not read a broadcast.
- Rules: replies to parents and students go to the app (and appear in the parent's inbox); HoD messages stay within staff.

Calendar (Desktop: "Calendar" · Phone: "Calendar" tab)

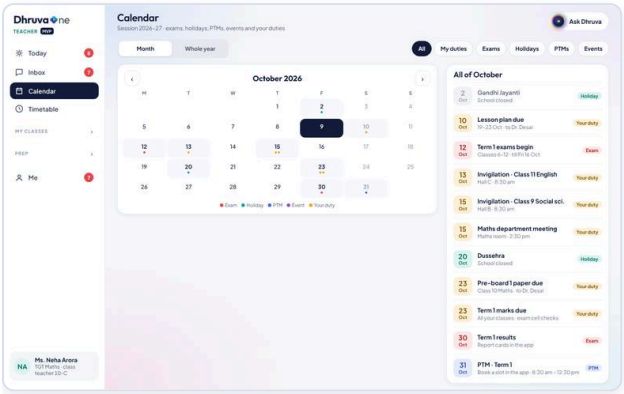

Desktop · Calendar

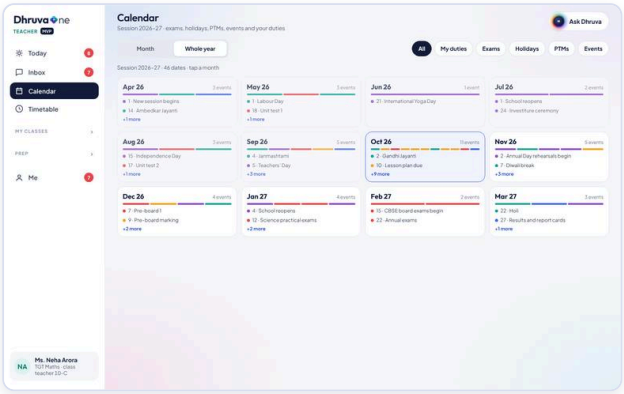

Desktop · Calendar year

Phone · Calendar

- What it shows: "Session 2026–27 · exams, holidays, PTMs, events and your duties". Toggle "Month / Whole year". Filters "All", "My duties", "Exams", "Holidays", "PTMs", "Events". Month grid (October 2026) with colour dots and a legend (Exam, Holiday, PTM, Event, Your duty), month navigation ‹ ›, and the list "All of October": 2 Oct Gandhi Jayanti (closed); 10 Oct Lesson plan due 19–23 Oct to Dr. Desai (duty); 12 Oct Term 1 exams begin Classes 6–12 till Fri 16 Oct; 13 Oct Invigilation Class 11 English Hall C 8:30 am; 15 Oct Invigilation Class 9 Social sci. Hall B and Maths department meeting 2:30 pm; 20 Oct Dussehra (closed); 23 Oct Pre-board 1 paper due (Class 10 Maths to Dr. Desai) and Term 1 marks due (exam cell checks); 30 Oct Term 1 results (report cards in the app); 31 Oct PTM Term 1, book a slot in the app 8:30 am to 12:30 pm.
- "Whole year" shows 12 month tiles ("46 dates · tap a month"), each with the first dates and "+N more" (Apr 26 to Mar 27, e.g. Oct 26 has 11 events; Dec 7 Pre-board 1, Feb 15 CBSE board exams begin).
- Interactions: tap a month tile to jump to that month; filters narrow the list. No add or edit (read-only for teachers).
- Rules: duties (invigilation, lesson plan due, meetings) are personal to the teacher; school-wide items come from the school calendar.

Timetable (Desktop: "Timetable" · Phone: week shown through "Week ›" on Today)

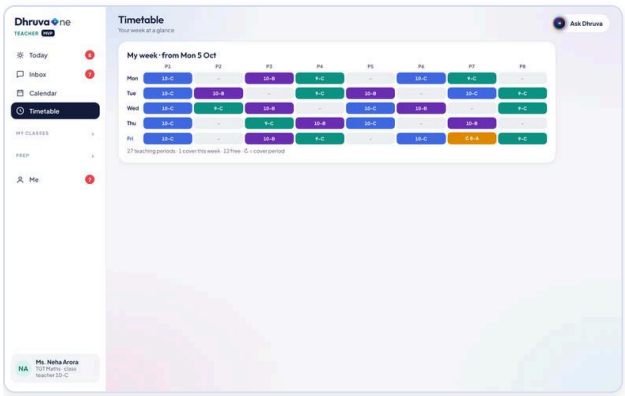

Desktop · Timetable

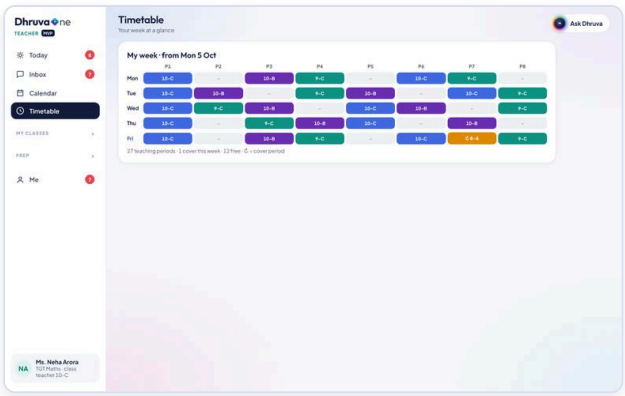

Desktop · Timetable week

- What it shows: "My week · from Mon 5 Oct" grid P1 to P8 by Mon to Fri with class chips (10–C, 10–B, 9–C), "–" for free and "↻ 8–A" for a cover period; footer "27 teaching periods · 1 cover this week · 12 free · ↻ = cover period". A Today/Week toggle switches between the day list and the week grid. Phone opens the week as a sheet from "Week ›" on the next-period card and closes with the sheet close.

My students (Desktop: MY CLASSES > "My students" · Phone: "Students" tab)

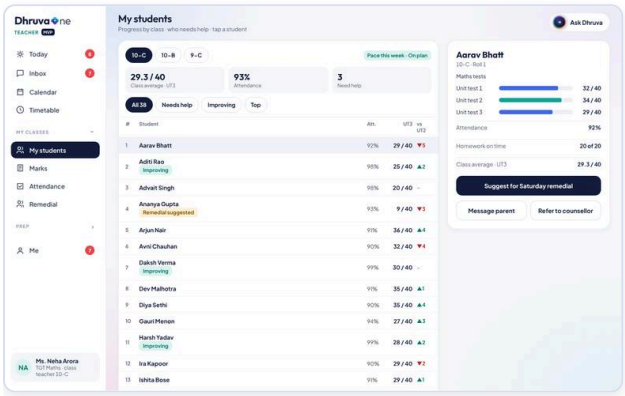

Desktop · My students

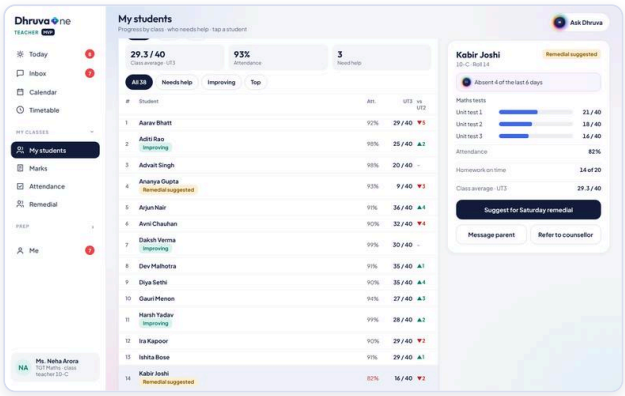

Desktop · Student detail

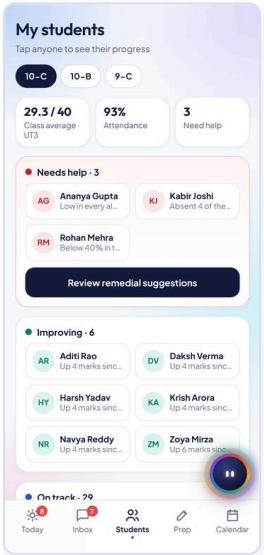

Phone · Students

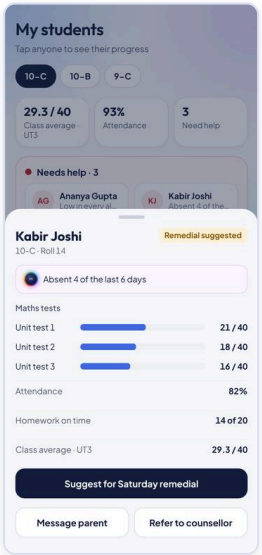

Phone · Student sheet

- What it shows: "Progress by class · who needs help · tap a student". Class pills 10–C, 10–B, 9–C. Pace chip "Pace this week · On plan" (from the end-of-day check). KPIs: Class average · UT3 29.3 / 40, Attendance 93%, Need help 3. Desktop: filter pills "All 38 / Needs help / Improving / Top" and a roster table (Roll, Student, flag chip, Att., UT3 score, "vs UT2" arrow up/down). Flags: "Remedial suggested" (Ananya Gupta 9/40, Kabir Joshi 16/40 with attendance 82%, Rohan Mehra 15/40), "Improving" (Aditi Rao, Daksh Verma, Harsh Yadav, Krish Arora, Navya Reddy, Zoya Mirza), "Top performer" (Samar Ahuja 39/40, Uday Chopra 37/40). Phone: three groups "Needs help · 3", "Improving · 6", "On track · 29" with reasons ("Low in every algebra question", "Absent 4 of the last 6 days", "Below 40% in the last three tests", "Up 4 marks since unit test 1") and "Show all 29 / Show fewer"; "Review remedial suggestions".

- Student detail (desktop right pane or dialog; phone bottom sheet), e.g. Kabir Joshi 10–C Roll 14: reason line, Maths tests (Unit test 1 21/40, Unit test 2 18/40, Unit test 3 16/40 with bars), Attendance 82%, Homework on time 14 of 20, Class average UT3. Buttons: "Suggest for Saturday remedial", "Message parent", "Refer to counsellor".
- Interactions: "Suggest for Saturday remedial" toasts "Kabir Joshi suggested for Saturday remedial · Mrs. Sinha told" and the row becomes "In Saturday remedial"; "Message parent" toasts "Message sent to Joshi family · replies come to your Messages"; "Refer to counsellor" toasts "Referred to Ms. Ritika Bhalla, counsellor" (the Remedial screen version adds "only she sees the reason").
- Rules: a top performer has no remedial suggestion button; class switch re-computes averages; a counsellor referral is visible to the counsellor only.

Marks (Desktop: MY CLASSES > "Marks" · Phone: opened from Today, Prep tile "Marks" or the P4 period action)

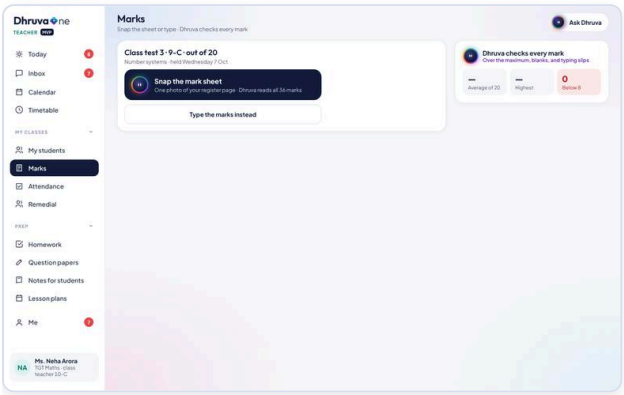

Desktop · Marks start

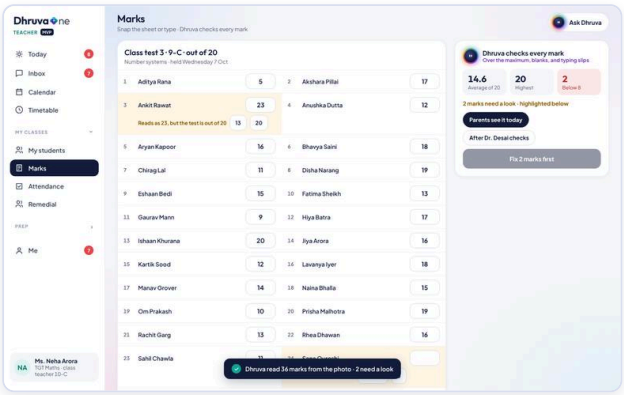

Desktop · Marks photo read

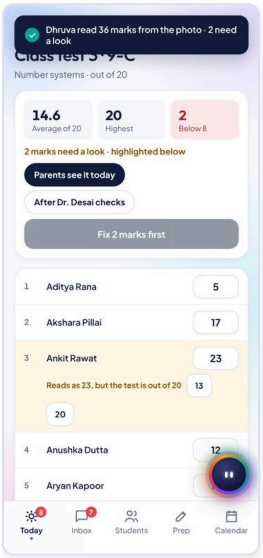

Phone · Marks photo read

- What it shows: "Class test 3 · 9–C · out of 20 · Number systems · held Wednesday 7 Oct". Two entry modes: "Snap the mark sheet" ("One photo of your register page · Dhruva reads all 36 marks") and "Type the marks instead" ("Dhruva checks every mark: over the maximum, blanks, and typing slips").
- Interactions (verified): "Snap the mark sheet" instantly fills the list of 36 students and toasts "Dhruva read 36 marks from the photo · 2 need a look". Two rows are highlighted amber: Ankit Rawat "Reads as 23, but the test is out of 20" with fix chips "13" and "20", and Sana Qureshi "No mark on the sheet" with chips "Absent" and "0". The summary updates live: "14.6 Average of 20", "20 Highest", "2 Below 8" and "2 marks need a look · highlighted below". Choosing a chip (or typing in the field) clears the flag. Share choice: "Parents see it today" or "After Dr. Desai checks". The save button reads "Fix 2 marks first", then "N marks left" (typing mode), then "Save marks" when all 36 are valid. Save toasts either "Saved · parents see marks at 4 pm · 2 students added to remedial suggestions" or "Saved · sent to Dr. Desai to check". The Today task becomes "Class test 3 marks saved · 9–C · Average 14.6 of 20".
- Dhruva help: reads the handwriting, flags over-maximum, blank and doubtful marks, and adds low scorers (e.g. Aditya Rana 5/20) to remedial suggestions.
- Rules: marks cannot be saved with flags unresolved or blanks; "AB" is used for absent; the sample 9–C roster has 36 students.

Attendance (Desktop: MY CLASSES > "Attendance" · Phone: pushed screen "Attendance · 10-C")

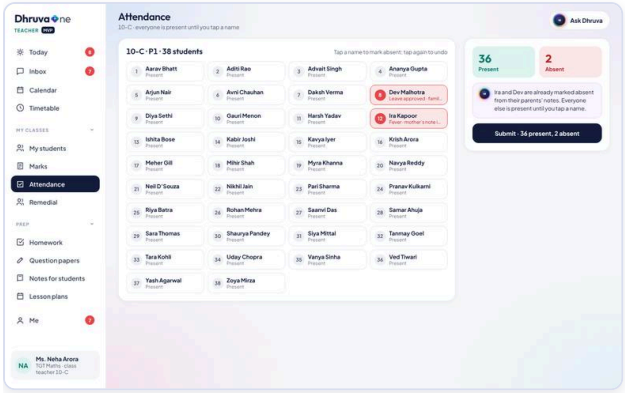

Desktop · Attendance

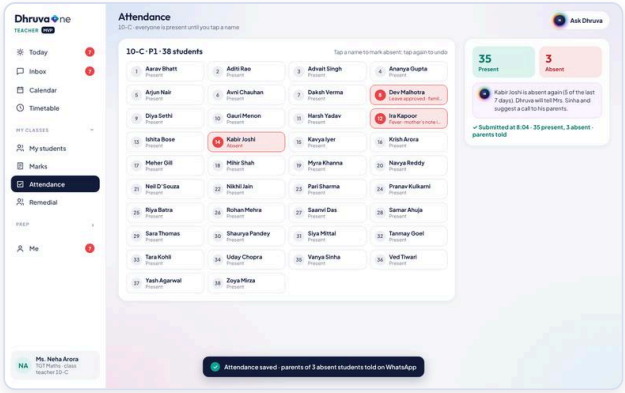

Desktop · Attendance submitted

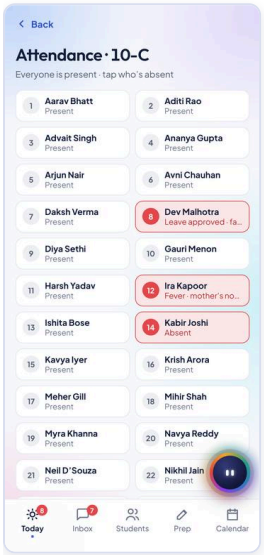

Phone · Attendance absent marked

- What it shows: "10–C · P1 · 38 students · Tap a name to mark absent; tap again to undo". Everyone is present by default. Two students are pre-marked from parents' notes: Dev Malhotra "Leave approved · family wedding" and Ira Kapoor "Fever · mother's note in the app". A counter "36 Present · 2 Absent" and the hint "Ira and Dev are already marked absent from their parents' notes. Everyone else is present until you tap a name." Submit button "Submit · 36 present, 2 absent".
- Interactions (verified): tapping a name marks it absent (red tile, "Absent") and the button updates ("Submit · 35 present, 3 absent"); tapping again undoes. Marking Kabir Joshi changes the hint to "Kabir Joshi is absent again (5 of the last 7 days). Dhruva will tell Mrs. Sinha and suggest a call to his parents." Submit toasts "Attendance saved · parents of 3 absent students told on WhatsApp" and the screen locks to "✓ Submitted at 8:04 · 35 present, 3 absent · parents told" (no further edits on that submission in the design).
- Dhruva help: pre-marks absentees from parents' leave notes; spots repeat absence and alerts the coordinator.
- Rules: default-present model; parents of absentees are told on WhatsApp on submit.

Homework (Desktop: PREP > "Homework" · Phone: reached from Today task "10-C homework · checked by Dhruva" and Prep tile "Homework · Check and return")

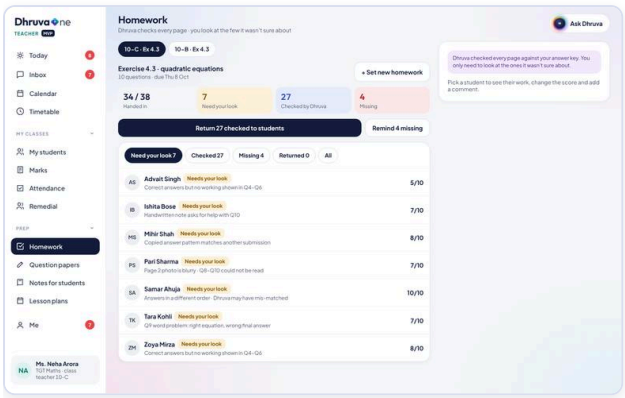

Desktop · Homework start

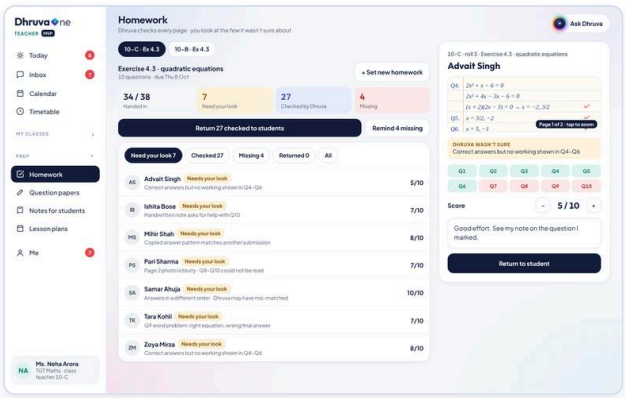

Desktop · Homework review

- What it shows: "Dhruva checks every page · you look at the few it wasn't sure about". Pills "10–C · Ex 4.3" and "10–B · Ex 4.3". "Exercise 4.3 · quadratic equations · 10 questions · due Thu 8 Oct". Tiles: Handed in 34 / 38, Need your look 7, Checked by Dhruva 27, Missing 4. Buttons "Return 27 checked to students" and "Remind 4 missing" and "+ Set new homework". Filters "Need your look 7 / Checked 27 / Missing 4 / Returned 0 / All". The seven "needs your look" students and reasons: Advait Singh (correct answers but no working shown in Q4–Q6, 5/10), Ishita Bose (handwritten note asks for help with Q10, 7/10), Mihir Shah (copied answer pattern matches another submission, 8/10), Pari Sharma (page 2 photo is blurry, Q8–Q10 could not be read, 7/10), Samar Ahuja (answers in a different order, Dhruva may have mis-matched, 10/10), Tara Kohli (Q9 word problem right equation wrong answer, 7/10), Zoya Mirza (no working shown, 8/10). Missing: Ira Kapoor and Dev Malhotra (absent on leave, not expected yet), Kabir Joshi and Rohan Mehra (not handed in).
- Interactions (verified): pick a student to see their scanned work (Page 1 of 2, "tap to zoom"), Dhruva's tick marks per question, an amber "DHRUVA WASN'T SURE" note, per-question chips Q1 to Q10 (green or red), a score stepper "– 5 / 10 +", a comment box (defaults e.g. "Well done. Keep showing your working."), and "Return to student" (toast "Returned to Advait Singh · 5/10"). For a missing student: "Send a reminder to student and parent" (toast "Reminder sent to Kabir Joshi and a parent"; button then reads "Reminded · send again"). Bulk: "Return 27 checked to students" toasts "27 returned with Dhruva's marks and your comment · students and parents see them now" and the list moves to Returned; "Remind 4 missing" toasts "Reminder sent to the students and their parents".
- "+ Set new homework" form: Class (10–C, 10–B), What to set ("From the book", "Dhruva writes it", "Reading"), Due (Mon 12 Oct, Tue 13 Oct, Thu 15 Oct), an optional note, preview line "Today's lesson in 10–C was '8.1 Finding all ratios from one ratio'. Ex 8.1 Q4–7 from the book." and "Send to 10–C"; toast "Homework set for 10–C · due Tue 13 Oct · students and parents see it on the app. Dhruva checks the pages when they come in."
- Dhruva help: reads each page, matches answers with the teacher's key, detects copying, blur and wrong ordering.
- Rules: only items Dhruva is unsure about need the teacher; returning pushes marks to students and parents.

Question papers (Desktop: PREP > "Question papers" · Phone: Prep > "Question paper")

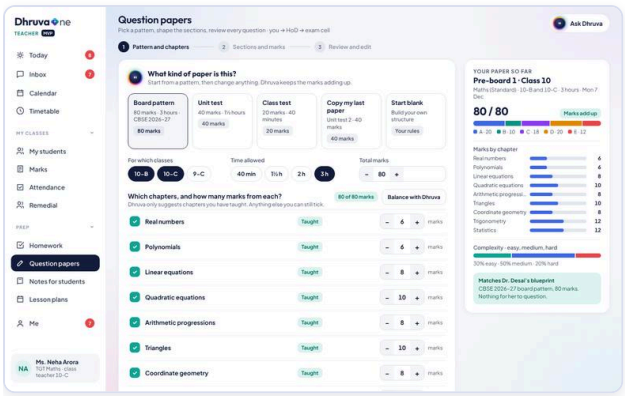

Desktop · Papers step1

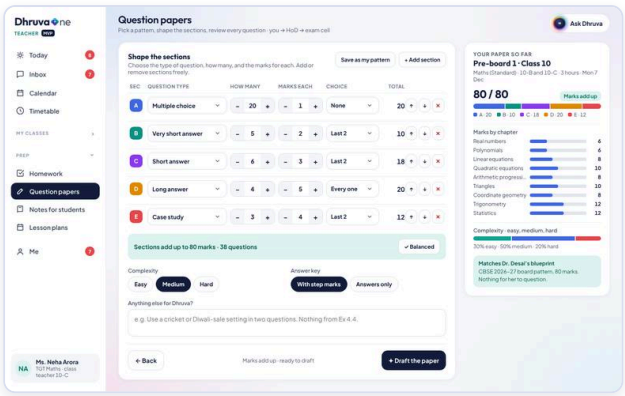

Desktop · Paper sections

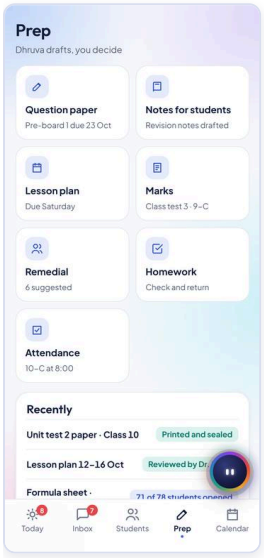

Phone · Prep

- What it shows: "Pick a pattern, shape the sections, review every question · you → HoD → exam cell". Three steps: "1 Pattern and chapters", "2 Sections and marks", "3 Review and edit".
- Step 1: choose "Board pattern (80 marks · 3 hours · CBSE 2026–27)", "Unit test (40 marks · 1½ hours)", "Class test (20 marks · 40 minutes)", "Copy my last paper (Unit test 2 · 40 marks)" or "Start blank". Rules: classes 10–B / 10–C / 9–C, time (40 min, 1½ h, 2 h, 3 h), total marks stepper. Chapters list with a tick, "Taught / Teaching from 19 Oct / Not started" and a marks stepper per chapter (Real numbers 6, Polynomials 6, Linear equations 8, Quadratic equations 10, Arithmetic progressions 8, Triangles 10, Coordinate geometry 8, Trigonometry 12, Statistics 12); a meter "80 of 80 marks" and button "Balance with Dhruva" (toast "Chapter marks balanced to 80"). Side panel "YOUR PAPER SO FAR: Pre-board 1 · Class 10, Maths (Standard) 10–B and 10–C, 3 hours, Mon 7 Dec", 80/80 "Marks add up", section bars A 20, B 10, C 18, D 20, E 12, marks by chapter, complexity "30% easy · 50% medium · 20% hard", and a blueprint check: "Matches Dr. Desai's blueprint: CBSE 2026–27 board pattern, 80 marks. Nothing for her to question." (if changed: "Differs from Dr. Desai's blueprint · She will see exactly what you changed when you send it, so add a reason if you like"). A chain "You → Dr. Desai (HoD check) → Exam cell (Print and seal) → Exam day Mon 7 Dec".
- Step 2: table of sections (A Multiple choice 20 × 1 = 20; B Very short answer 5 × 2 = 10; C Short answer 6 × 3 = 18; D Long answer 4 × 5 = 20; E Case study 3 × 4 = 12). Per section: question type (Multiple choice, Assertion and reason, Fill in the blank, Very short answer, Numerical problem, Short answer, Case study, Long answer), how many (– +), marks each (– +), choice (None / Last 2 / Every one), reorder ↑ ↓, remove ×; "+ Add section"; "Save as my pattern" (toast "Saved as 'My Maths pattern' · pick it next time from the first step"); total line "Sections add up to 80 marks · 38 questions ✓ Balanced"; complexity (Easy/Medium/Hard); answer key ("With step marks", "Answers only"); free-text "Anything else for Dhruva?"; "← Back" and "✦ Draft the paper" (flashes "Marks add up to N of 80 · use Balance with Dhruva" if not balanced; success "Draft ready · 38 questions · every one can be edited").
- Step 3: for each section, Dhruva's questions with chapter, difficulty chip and marks; per question "Another question", "Pin", "Delete"; per section "✦ Redraft section" (toast "Section A redrafted · pinned questions kept"), "+ Write a question", "✦ Ask Dhruva for one"; top buttons "Fill the gaps" (toast "Dhruva filled the gaps to the pattern · your questions are kept") and "✦ Redraft all" ("Redrafted · pinned questions kept"); "N more drafted by Dhruva · open the Word file or print preview to read them all". Side actions: "Send to Dr. Desai" (disabled with "N marks still to add" until marks balance; toast "Sent to Dr. Anjali Desai · you'll see her comments here"; the chain moves to "Reviewing"), "Print" (dialog: copies, space for answers; toast "Sent to the printer · N pages · marked DRAFT" until sent, with "Saved as PDF · maths-paper-draft.pdf"), "Word file" ("Word file downloaded · edit it and upload it back if you like").

- Dhruva help: drafts the whole paper to the pattern and balances marks, difficulty mix and chapters; keeps pinned questions on redraft.
- Rules: marks must equal the total before sending; only taught chapters are suggested (others can still be ticked); board-pattern papers are checked against the HoD's blueprint; flow is teacher to HoD to exam cell.

Notes for students (Desktop: PREP > "Notes for students" · Phone: Prep > "Notes for students")

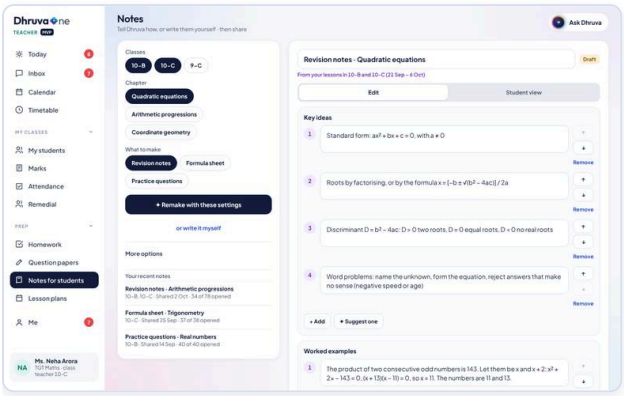

Desktop · Notes draft

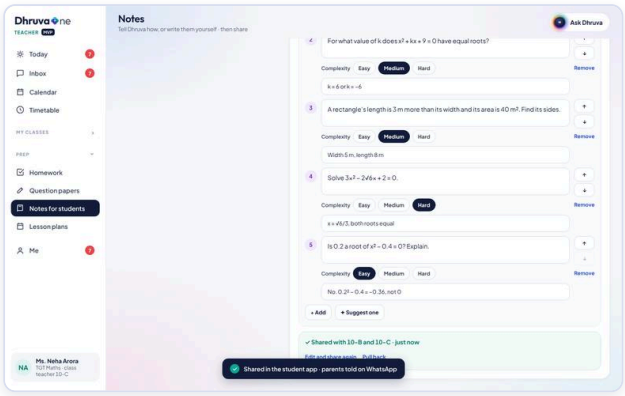

Desktop · Notes shared

- What it shows: "Tell Dhruva how, or write them yourself · then share". Controls: Classes (10–B, 10–C, 9–C), Chapter (Quadratic equations, Arithmetic progressions, Coordinate geometry), What to make (Revision notes, Formula sheet, Practice questions), "✦ Remake with these settings", "or write it myself", "More options" (level, number of worked examples and practice questions, mix, language). "Your recent notes" (Revision notes · Arithmetic progressions, shared 2 Oct, 34 of 78 opened; Formula sheet · Trigonometry 37 of 38; Practice questions · Real numbers 40 of 40).
- Draft area: "Draft · From your lessons in 10–B and 10–C (21 Sep – 6 Oct)" with "Edit / Student view" toggle; sections Key ideas, Worked examples, Practice questions (each item editable with ↑ ↓ Remove, practice items with Easy/Medium/Hard, "+ Add", "✦ Suggest one"). "Share with students: To 10–B, 10–C 78 students · When: Now / Tomorrow 7 am / Sun 6 pm · Parents and downloads: Tell parents too / Students only; PDF allowed / Read in app only". Button "Share with 10–B and 10–C · 78 students".
- Interactions (verified): sharing toasts "Shared in the student app · parents told on WhatsApp" (or "Scheduled for Tomorrow 7 am · you can still edit until then"), the draft chip becomes "Shared", the task card on Today becomes "Revision notes shared · Quadratic equations · 10–B and 10–C", and the panel shows "✓ Shared with 10–B and 10–C · just now" with "Edit and share again" and "Pull back" (toast "Pulled back. Students no longer see it until you share again."). Photo source: "Dhruva read 3 photos of your notes and tidied them · edit anything"; lessons source: "Made from your lessons of 21 Sep – 6 Oct · edit anything". PDF export toasts "PDF downloaded · print it for the class if you like".
- Dhruva help: builds notes from the lesson log or from photos of the teacher's own notes; suggests items; read counts return per class.

Lesson plans (Desktop: PREP > "Lesson plans" · Phone: Prep > "Lesson plan")

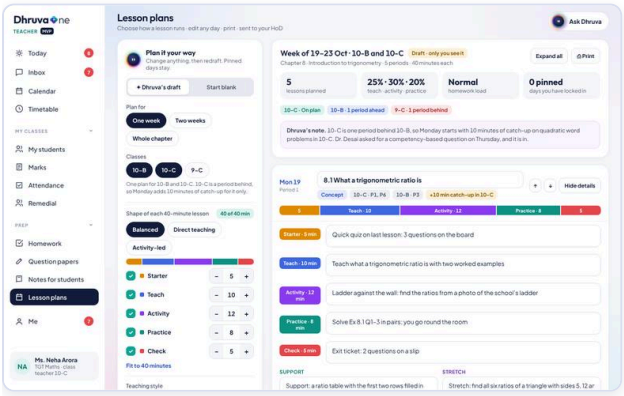

Desktop · Lesson plans

- What it shows: "Choose how a lesson runs · edit any day · print · sent to your HoD". "Plan it your way": mode "✦ Dhruva's draft" or "Start blank"; Plan for One week / Two weeks / Whole chapter; Classes 10–B, 10–C, 9–C (note "One plan for 10–B and 10–C. 10–C is a period behind, so Monday adds 10 minutes of catch-up for it only."); lesson shape for a 40–minute lesson with steppers Starter 5, Teach 10, Activity 12, Practice 8, Check 5 and presets Balanced / Direct teaching / Activity-led with "Fit to 40 minutes" (toast "Adjusted to 40 minutes"); Teaching style (Activity-based, Board work, Mixed); Extras (Support and stretch tasks; Share a student version after Dr. Desai approves); Homework (None / Light / Normal); Check understanding (Friday quiz / Exit tickets only / Nothing extra); What you have in the room (Smart board, GeoGebra, Maths lab kit, Worksheets); free text "Anything else for Dhruva?"; "✦ Redraft with these settings".

- Output: "Week of 19–23 Oct · 10–B and 10–C · Draft · only you see it · Chapter 8 Introduction to trigonometry · 5 periods · 40 minutes each". Summary tiles (5 lessons planned; 25% · 30% · 20% teach · activity · practice; Normal homework; 0 pinned days), pace chips (10–C on plan, 10–B 1 period ahead, 9–C 1 period behind) and "Dhruva's note" about the catch-up and Dr. Desai's competency-based question on Thursday (included). Each day (Mon 19 to Fri 23) has period, type (Concept, Application…), classes and periods, "+10 min catch-up in 10–C", ↑ ↓ reorder, "Show/Hide details" with the five timed blocks, SUPPORT, STRETCH, HOMEWORK, "✦ Another idea for the activity", "✦ Fill this day with Dhruva", "Pin this day". "Expand all", "Print".
- Interactions: "Fill this day" toasts "Dhruva filled <day>"; "Redraft" keeps pinned days ("Redrafted · pinned days kept"); sending requires every period to have a topic and activity ("Add a topic and activity for each lesson first"); "Send to Dr. Anjali Desai" toasts "Sent to Dr. Anjali Desai · she usually reviews by Monday" and the Today task becomes "Lesson plan sent to Dr. Desai". Print dialog (one page / full / cover) toasts "Sent to the printer · N page(s) · marked DRAFT" until sent; "Saved as PDF · lesson-plan-draft.pdf".

Remedial (Desktop: MY CLASSES > "Remedial" · Phone: reached from Students "Review remedial suggestions" or Prep tile "Remedial · 6 suggested")

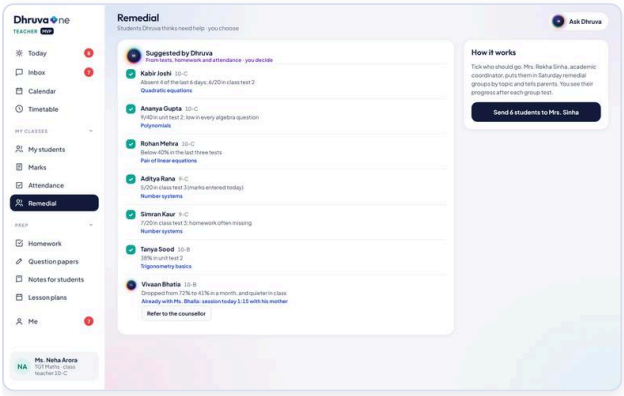

Desktop · Remedial

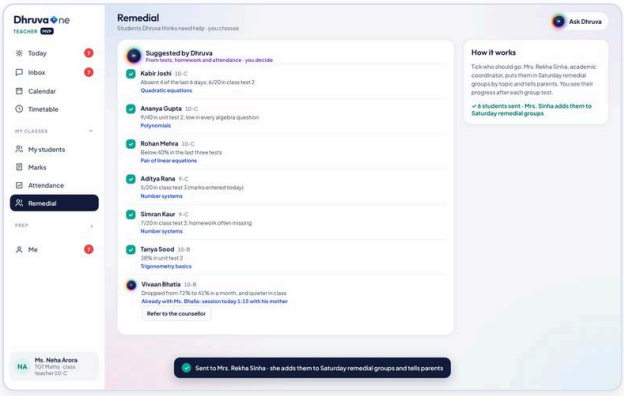

Desktop · Remedial sent

- What it shows: "Students Dhruva thinks need help · you choose · Suggested by Dhruva: from tests, homework and attendance". Six ticked rows with class, reason and topic: Kabir Joshi 10–C (absent 4 of last 6 days; 6/20 in class test 2; Quadratic equations), Ananya Gupta 10–C (9/40; Polynomials), Rohan Mehra 10–C (below 40% in last three tests; Pair of linear equations), Aditya Rana 9–C (5/20 in class test 3 entered today), Simran Kaur 9–C (7/20; homework often missing), Tanya Sood 10–B (38% in UT2; Trigonometry basics). A seventh, Vivaan Bhatia 10–B, is not a remedial case: "Dropped from 72% to 41% in a month, and quieter in class · Already with Ms. Bhalla: session today 1:15 with his mother" with "Refer to the counsellor". Note "How it works: Tick who should go. Mrs. Rekha Sinha, academic coordinator, puts them in Saturday remedial groups by topic and tells parents. You see their progress after each group test."
- Interactions (verified): untick a student to leave them out (the button count changes: "Send 6 students to Mrs. Sinha" becomes 5…); "Send 6 students to Mrs. Sinha" toasts "Sent to Mrs. Rekha Sinha · she adds them to Saturday remedial groups and tells parents" and the list locks to "✓ 6 students sent · Mrs. Sinha adds them to Saturday remedial groups". "Refer to the counsellor" toasts "Referred to Ms. Ritika Bhalla, counsellor · only she sees the reason".
- Rules: wellbeing concerns go to the counsellor, not to remedial; the counsellor alone sees the reason.

Me (Desktop: "Me" with count · Phone: avatar "NA", screen "Me")

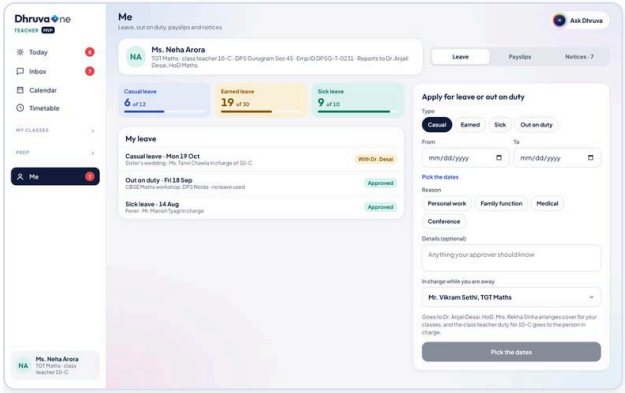

Desktop · Leave form

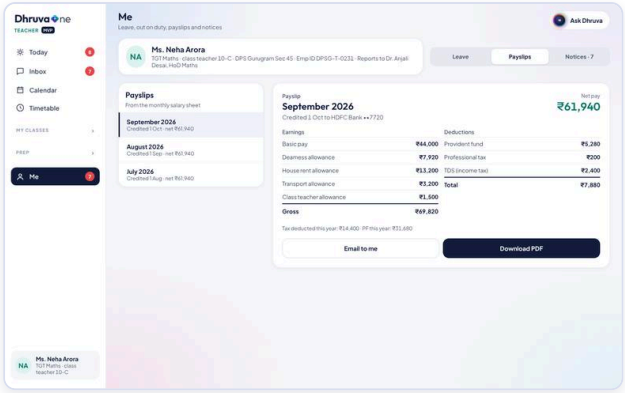

Desktop · Payslip

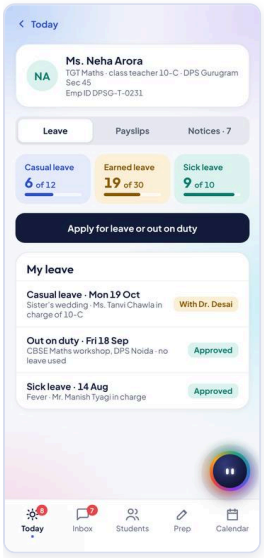

Phone · Me

- What it shows: profile (Ms. Neha Arora, TGT Maths · class teacher 10–C · DPS Gurugram Sec 45 · Emp ID DPSG-T-0231 · reports to Dr. Anjali Desai). Tabs "Leave", "Payslips", "Notices · 7". Balances: Casual 6 of 12, Earned 19 of 30, Sick 9 of 10. "My leave": Casual leave Mon 19 Oct (sister's wedding, Ms. Tanvi Chawla in charge of 10–C) "With Dr. Desai"; Out on duty Fri 18 Sep (CBSE Maths workshop, DPS Noida, no leave used) Approved; Sick leave 14 Aug Approved.
- Apply form: Type (Casual / Earned / Sick / Out on duty), From, To, Reason chips (Personal work, Family function, Medical, Conference), optional details, "In charge while you are away" (Mr. Vikram Sethi, Mr. Manish Tyagi, Ms. Ritu Sharma, all TGT Maths). Route note: "Goes to Dr. Anjali Desai, HoD. Mrs. Rekha Sinha arranges cover for your classes, and the class teacher duty for 10–C goes to the person in charge." Send toasts "Sent to Dr. Anjali Desai, HoD · <name> will be in charge" and about 4.5 s later "Your leave is approved by Dr. Anjali Desai" (or "Out on duty approved by …"); an out-on-duty request shows "Out on duty · <dates> · Waiting for Dr. Desai", then "Approved · cover arranged" on Today.
- Payslips: September/August/July 2026, "Credited 1 Oct · net ₹61,940". Detail (verified): Credited to HDFC Bank ••7720; Earnings Basic ₹44,000, DA ₹7,920, HRA ₹13,200, Transport ₹3,200, Class teacher allowance ₹1,500, Gross ₹69,820; Deductions PF ₹5,280, Professional tax ₹200, TDS ₹2,400, Total ₹7,880; "Tax deducted this year: ₹14,400 · PF this year: ₹31,680"; "Email to me", "Download PDF".
- Notices: from the principal, HoD, group office and HR (phone list: Mr. V.K. Shunglu "October salary before Dussehra", "Diwali greetings and break dates", Group HR "Health insurance: add family members by 23 Oct", Ms. Neelam Mehra "Staff meeting, Saturday 10 Oct at 12:30 pm", "Term 1 exam duty roster"); unread dots; some need "Confirm" (toast "Confirmed · <sender> can see it"); "mark all read".

Switch profile (phone only)

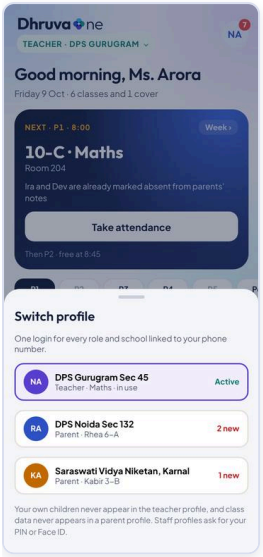

Phone · Switch profile

- What it shows: tapping "TEACHER · DPS GURUGRAM ⌄" opens "Switch profile · One login for every role and school linked to your phone number." Rows: NA "DPS Gurugram Sec 45 · Teacher · Maths · in use · Active"; RA "DPS Noida Sec 132 · Parent · Rhea 6–A · 2 new"; KA "Saraswati Vidya Niketan, Karnal · Parent · Kabir 3–B · 1 new". Footnote: "Your own children never appear in the teacher profile, and class data never appears in a parent profile. Staff profiles ask for your PIN or Face ID."

Ask Dhruva (Desktop: header button · Phone: orb)

Gaps / differences between desktop and phone

- Desktop has a left navigation with grouped MY CLASSES and PREP and a split-pane layout (list on the left, detail on the right) for Inbox, Students and Homework. Phone has five tabs (Today, Inbox, Students, Prep, Calendar) and pushed screens; Prep is a tile grid (Question paper, Notes for students, Lesson plan, Marks, Remedial, Homework, Attendance) with a "Recently" list.
- Desktop has a dedicated Timetable page (day and week); phone reaches the week from "Week ›". Desktop Me is a nav item; phone Me is the avatar. The switch-profile sheet exists on the phone only.
- Desktop Today shows 8 tasks, phone 7. The phone Inbox thread screen is a full page; the desktop reply sits in a side pane.
- The same flows (attendance, marks, homework review, paper builder, notes, plan, remedial, leave, payslips) exist on both; the large tables (paper step 2, plan details, roster) are easier on desktop.
- Not verified by click-through on phone: the paper, notes and plan editors and the broadcast composer (confirmed in source to share the same logic as desktop).

PART 3

Operations

HR and Payroll

Finance and Accounts

Admissions and CRM

Security and IT

Transport and Bus Attendant

OPERATIONS · DESKTOP · PHONE

HR and Payroll

One person runs staff records, attendance corrections, leave that affects pay, four separate payrolls, hiring, onboarding and exits for 296 staff, with Dhruva preparing each step and asking for one decision at a time.

Who uses it. Ms. Nandini Rao, "HR & payroll executive", DPS Gurugram Sec 45 (Emp ID DPSG-S-0215, reports to Ms. Neelam Mehra, Principal). Product badge in the header: "PEOPLE & PAYROLL" with an "MVP" tag.

On the following pages:

- Today (Desktop: "Today" · Phone: "Today")
- Employees (Desktop: "Employees" · Phone: "People")
- Attendance and leave (Desktop: "Attendance & leave" · Phone: "Requests")
- Payroll (Desktop: "Payroll" · Phone: "Payroll")
- Hiring and onboarding (Desktop: "Hiring & onboarding" · Phone: reached from Today button "Hiring and onboarding", no tab)
- Exits (Desktop only: "Exits" · Phone: "Exits are on the desktop")
- Me (Desktop: "Me" · Phone: avatar "NR" top right)

Business summary

HR and payroll for a 296-person campus normally means chasing HoDs for approvals, reconciling attendance against salary sheets, and discovering errors after money has left the bank. DhruvaOne turns this into a short, ordered queue. Dhruva reads the attendance, leave, timetable, gate log and last month's salary sheet, prepares the October run, and lists only what a human must decide: an IFSC mismatch, a duplicated arrears line, a missing UAN, an agency invoice that does not match the gate log, a claim for more periods than were taught.

Payroll is not one run. The design shows four separate payrolls (Teaching, Non-teaching, Contract, Visiting and part-time), each with its own basis (monthly salary, fixed fee or invoice, per period), pay date, earnings, deductions and approver. Salaries can be paid early (for example before Dussehra) with attendance locked to a cut-off date. The principal approves from her phone, and the owner/principal send notices to staff that HR can see on the "Me" page. Hiring (shortlists the AI has already read), joiner checklists and a full exit checklist (documents, clearance, assets, final settlement) sit in the same place. Every record change is logged.

Daily story (what Dhruva surfaces first)

Friday 9 October, Gurugram Sec 45. The Today page opens with "Good morning, Ms. Rao" and one card at a time, "6 THINGS NEED YOU · 1 OF 6", in this order:

1. **"Run October payroll early"**, "Salaries go out Mon 19 Oct, before Dussehra · Dhruva prepared the run and found 5 exceptions across 4 payrolls". Buttons "Open payroll" and "Later ›".
2. "4 attendance corrections to verify" (button "Verify all").
3. "3 leave issues affect pay" ("Use suggestions").
4. "2 people join on Monday" ("Send reminders"). Logins and ID cards are ready, 5 checklist items still open.
5. "Alok Jain's exit: 2 items open" ("Chase both"): laptop not returned, accounts clearance pending.
6. "5 documents expire in 30 days" ("Request renewals"): police verification for 3 drivers and guards, 2 contracts end 31 Oct.

Beneath the card, on desktop an "Up next" list shows the next four items; on phone a row of 6 dots shows position. "See all 6 for today · 0 done" expands the list. Doing an item (or tapping "Later ›") brings the next one forward; the counter updates ("done" count and red badges on the side navigation).

Screens

Today (Desktop: "Today" · Phone: "Today")

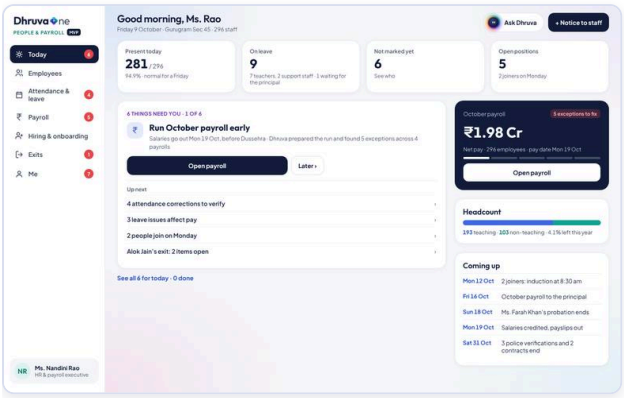

Desktop · Today

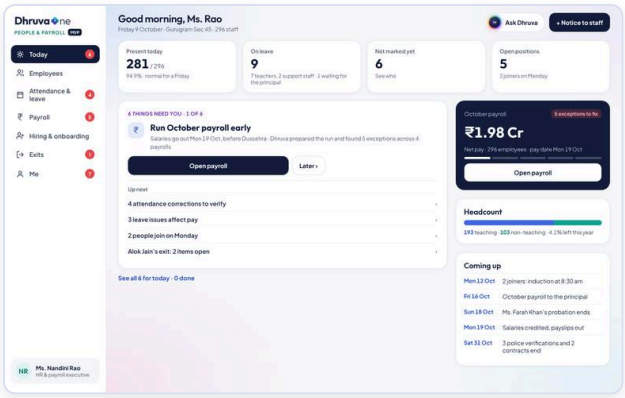

Desktop · Start

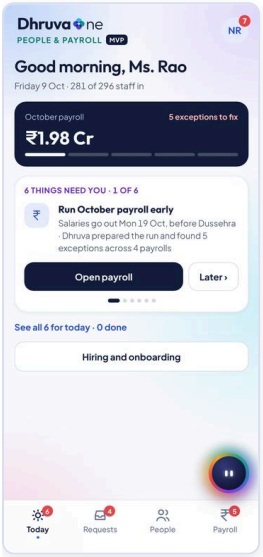

Phone · Today

- **What it shows (desktop):** four KPI tiles: "Present today 281 / 296 · 94.9% · normal for a Friday"; "On leave 9 · 7 teachers, 2 support staff · 1 waiting for the principal"; "Not marked yet 6 · See who"; "Open positions 5 · 2 joiners on Monday". The focus card (above), a dark "October payroll" card ("5 exceptions to fix", "₹1.98 Cr", "Net pay · 296 employees · pay date Mon 19 Oct", a 5-segment progress bar, button "Open payroll"), a "Headcount" card (blue/green bar: "193 teaching · 103 non-teaching · 4.1% left this year") and a "Coming up" list: Mon 12 Oct "2 joiners: induction at 8:30 am"; Fri 16 Oct "October payroll to the principal"; Sun 18 Oct "Ms. Farah Khan's probation ends"; Mon 19 Oct "Salaries credited, payslips out"; Sat 31 Oct "3 police verifications and 2 contracts end".
- **What it shows (phone):** "Friday 9 Oct · 281 of 296 staff in", the dark payroll card (exceptions, ₹1.98 Cr, progress bar), the focus card with six pager dots, "See all 6 for today · 0 done", and a "Hiring and onboarding" button. The NR avatar (top right, red badge 7) opens "Me". A floating Dhruva orb sits bottom right. Bottom tabs: "Today 6", "Requests 4", "People", "Payroll 5".
- **Functions:** "Open payroll" (opens Payroll with the Teaching run selected); "Later ›" (defers to the next card); "Verify all", "Use suggestions", "Send reminders", "Chase both", "Request renewals" (each does the whole step in one tap, see below); KPI "Not marked yet 6 / See who" (jumps to attendance, Today's attendance); "+ Notice to staff" (desktop header); "Ask Dhruva" (desktop header) or orb (phone).
- **Interactions and messages:** "Verify all" flashes "4 corrections verified · attendance updated". "Use suggestions" flashes "3 leave issues settled · staff told on the app". "Send reminders" flashes "Imran Qureshi and Sneha Joshi reminded on WhatsApp" and the card becomes "Joiners reminded". "Chase both" flashes "Accounts cleared · laptop returned to the IT store" and the card becomes "Alok Jain's exit cleared · Final settlement ready to send". "Request renewals" flashes "3 police verification forms sent · 2 renewals drafted for the principal" and becomes "Renewals requested". "+ Notice to staff" flashes "Notice to staff opened · Dhruva can draft it". Payroll card text changes with progress ("With the principal", "Paid · credits Mon 19 Oct").
- **Dhruva help:** prepared the payroll run and its exceptions before HR opens the app. Suggested questions in the chat: "What changed in pay since September?", "Whose probation ends this month?", "Which documents expire soon?". Answers carry a source line ("September and October salary sheets", "Staff records", "Staff documents") and small stat chips. For other questions the MVP replies "In the MVP I help with staff records, attendance, leave, payroll, hiring and exits. I answer from your records and show the source."

- **Rules and edge cases:** a card disappears once its condition is met. The queue is the same list on desktop and phone.

Employees (Desktop: "Employees" · Phone: "People")

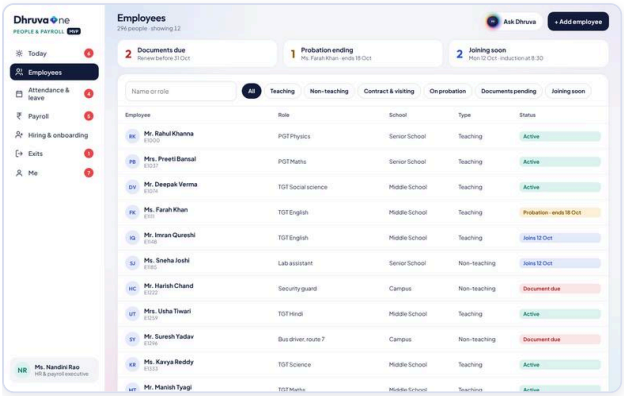

Desktop · Employees

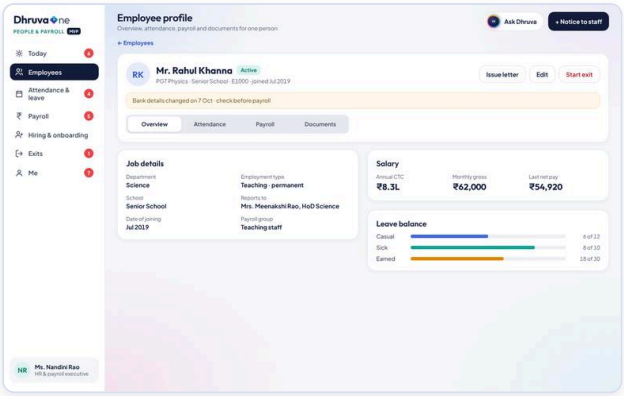

Desktop · Profile

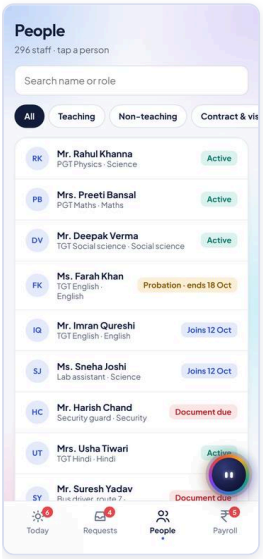

Phone · People

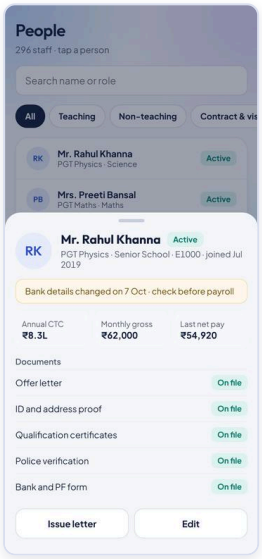

Phone · Person sheet

- **What it shows:** "296 people · showing 12". Three smart tiles (desktop): "2 Documents due · Renew before 31 Oct", "1 Probation ending · Ms. Farah Khan · ends 18 Oct", "2 Joining soon · Mon 12 Oct · induction at 8:30". Filter pills: "All", "Teaching", "Non-teaching", "Contract & visiting", "On probation", "Documents pending", "Joining soon". Table columns: Employee, Role, School, Type, Status. Sample: Mr. Rahul Khanna E1000 PGT Physics, Senior School, Teaching, Active; Ms. Farah Khan "Probation · ends 18 Oct"; Mr. Imran Qureshi "Joins 12 Oct"; Mr. Harish Chand Security guard "Document due"; Mr. Suresh Yadav Bus driver route 7 "Document due"; Mr. Rajendra Singh Swimming coach (contract); Ms. Ankita Sood Visiting music teacher. Footer "Showing 12 of 296 · click anyone to open their profile". Schools shown: Senior School, Middle School, Primary School, Campus, Campus office.
- **Functions:** search box (matches name, role, department); filter pills; the three tiles act as filters (tap again to clear); when a filter is on, a bar offers an action and "+ Save as my view" (saved filters appear as chips under "My views" and the label becomes "✓ Saved to My views"); header button "+ Add employee"; clicking a row opens the profile (desktop page, phone bottom sheet).
- **Bar actions:** Documents due: "Request renewals" -> flash "Renewal requests sent · police verification forms and contract drafts", then "Sent ✓". On probation: "Ask HoD for review" -> "Asked the HoD for Ms. Farah Khan's review", then "Asked ✓". Joining soon: "Send induction reminder" -> "Imran and Sneha asked for the missing items", then "Reminded ✓". Saving: "Saved · find it under My views" / "Removed from My views". "+ Add employee" flashes "New employee: Dhruva fills what it can from the offer letter".
- **Profile (desktop page "Employee profile", phone sheet "Person"):** header with initials, name, status chip, role, school, employee ID, joining date, a yellow alert where relevant (for Mr. Khanna: "Bank details changed on 7 Oct · check before payroll"). Buttons: "Issue letter" (flash "Letter templates: experience, salary certificate, NOC · Dhruva fills them in"), "Edit" ("Record opened for editing · changes are logged"), "Start exit" (opens Exits, "Start an exit for <name> from the Exits page"), "← Employees". Four tabs on desktop: **Overview** (Department, Employment type with "permanent" or "probation", School, Reports to, Date of joining, Payroll group; Salary: Annual CTC ₹8.3L, Monthly gross ₹62,000, Last net pay ₹54,920; Leave balance bars Casual 6 of 12, Sick 8 of 10, Earned 18 of 30); **Attendance** (October calendar coloured for present, holiday, leave, late; one-line summary such as "7 present · 1 late · 1 holiday so far"; new joiners show "Starts on 12 Oct"); **Payroll** (last six months of payslips, gross and net, tap opens "Payslip for September 2026 opened"); **Documents** (Offer letter, ID and address proof, Qualification certificates, Police verification, Bank and PF form, each with a status chip; tap on a missing item flashes "

<document> requested from <name>"). Contract staff show "No leave: paid a fixed fee as per contract"; visiting staff show "No leave: paid for periods taught". Phone sheet shows the same with Annual CTC, Monthly gross, Last net pay and the document list plus "Issue letter" and "Edit".

- **Dhruva help:** "Whose probation ends this month?" -> Ms. Farah Khan (TGT English) on 18 Oct; HoD Mrs. Anita Joshi's review is due; confirmation letter already drafted. "Which documents expire soon?" -> three police verifications and two contracts on 31 Oct.
- **Rules and edge cases:** document status for joiners: Offer letter Signed, ID and address Received, Police verification Missing, Bank and PF form Pending. Edits are logged.

Attendance and leave (Desktop: "Attendance & leave" · Phone: "Requests")

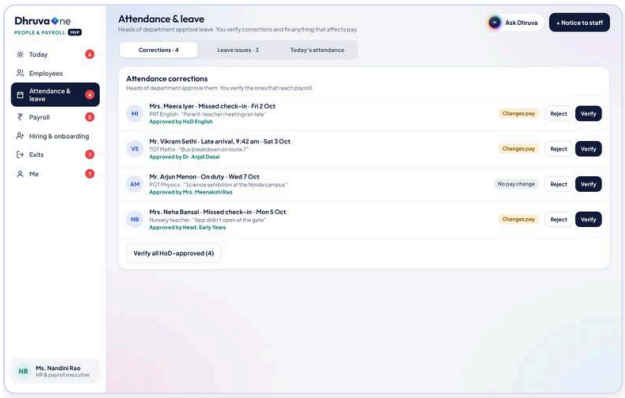

Desktop · Leave corrections

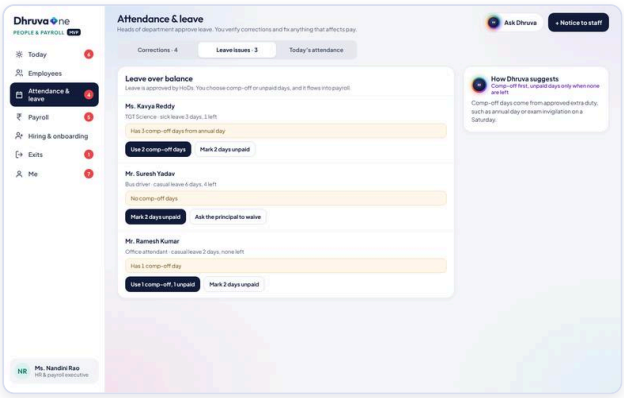

Desktop · Leave issues

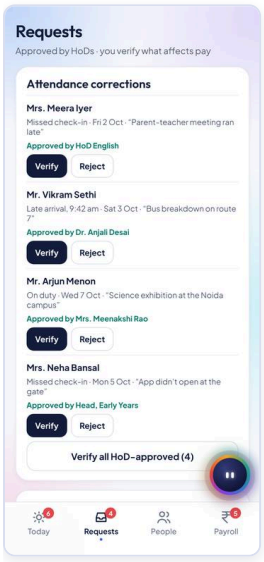

Phone · Requests

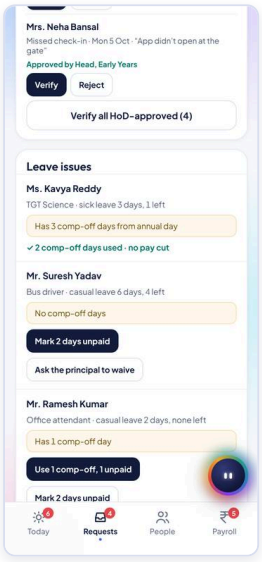

Phone · Requests after comp

- **What it shows:** "Heads of department approve leave. You verify corrections and fix anything that affects pay." Desktop has three tabs, "Corrections · 4", "Leave issues · 3", "Today's attendance". The phone "Requests" tab ("Approved by HoDs · you verify what affects pay") stacks Attendance corrections and Leave issues on one screen; "Today's attendance" is desktop only (on phone Today's numbers are in the "Today" page header only).
- **Corrections (all HoD-approved):** Mrs. Meera Iyer, Missed check-in Fri 2 Oct ("Parent-teacher meeting ran late", approved by HoD English, Changes pay); Mr. Vikram Sethi, Late arrival 9:42 am Sat 3 Oct ("Bus breakdown on route 7", approved by Dr. Anjali Desai, Changes pay); Mr. Arjun Menon, On duty Wed 7 Oct ("Science exhibition at the Noida campus", approved by Mrs. Meenakshi Rao, No pay change); Mrs. Neha Bansal, Missed check-in Mon 5 Oct ("App didn't open at the gate", approved by Head Early Years, Changes pay). Buttons per row: "Verify" -> chip "✓ Verified"; "Reject" -> "Rejected · person told". Footer "Verify all HoD-approved (4)" -> "4 corrections verified · attendance updated", then "✓ All verified".
- **Leave issues (leave over balance):** HoDs approve leave; HR chooses comp-off or unpaid days and the choice flows into payroll. Ms. Kavya Reddy (TGT Science, sick leave 3 days, 1 left; has 3 comp-off days from annual day): "Use 2 comp-off days" or "Mark 2 days unpaid". Mr. Suresh Yadav (bus driver, casual 6 days, 4 left; no comp-off): "Mark 2 days unpaid" or "Ask the principal to waive". Mr. Ramesh Kumar (office attendant, casual 2 days, none left; has 1 comp-off): "Use 1 comp-off, 1 unpaid" or "Mark 2 days unpaid". A box "How Dhruva suggests: Comp-off first, unpaid days only when none are left. Comp-off days come from approved extra duty, such as annual day or exam invigilation on a Saturday." Once chosen the row shows "✓ 2 comp-off days used · no pay cut" (phone, verified by click).
- **Today's attendance (desktop):** "Present by group": Teaching 186 of 193, Non-teaching 95 of 103. "Not marked yet · 6" (Mr. Kishan Lal, security guard, night shift ended 7 am; Mrs. Geeta Rao; Mr. Pankaj Mehta; Ms. Tanvi Chawla; Mr. Dinesh Rawat; Mrs.

Lata Sharma, librarian) with button "Remind all 6" -> "6 staff reminded to mark attendance" (also the text "Reminder sent · they can check in with one tap from Today" shown for individuals). "On leave today" (9, "Showing 4 of 9"): Mr. Arjun Menon Sick 9–12 Oct approved by HoD Science; Ms. Meera Iyer Sick 9–12 Oct "Waiting for Ms. Neelam Mehra"; Mr. Anil Kapoor, Mrs. Sunita Bhatia, Mr. Deepak Rawat, Mrs. Kavita Rao, Ms. Pooja Malik (Casual today, each with approving HoD); Mrs. Seema Kohli Earned 8–12 Oct, approved by the Principal; Mr. Suresh Kumar housekeeping sick, approved by HR.

- **Dhruva help:** corrections were checked against the timetable before being listed. Suggestion buttons carry Dhruva's recommended choice.
- **Rules and edge cases:** each correction is tagged "Changes pay" or "No pay change". Payroll cannot be locked until all corrections are verified (see Payroll). Unpaid days feed the "Leave without pay" line of the run (–₹6,700 for non-teaching).

Payroll (Desktop: "Payroll" · Phone: "Payroll")

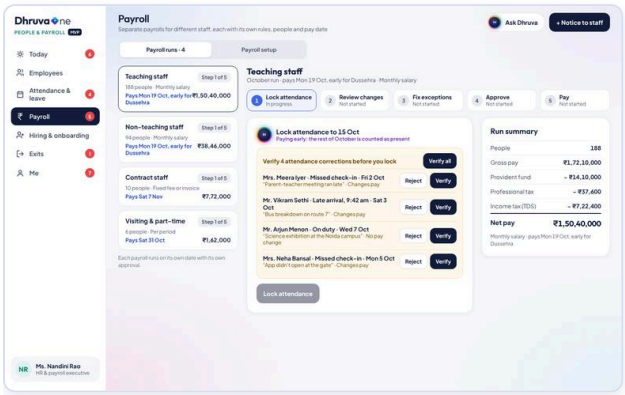

Desktop · Payroll

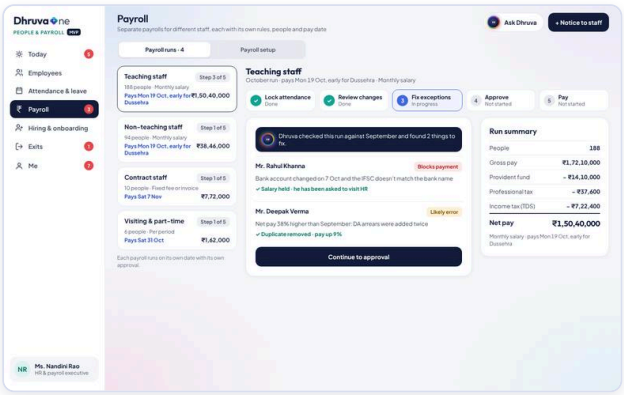

Desktop · Payroll exceptions

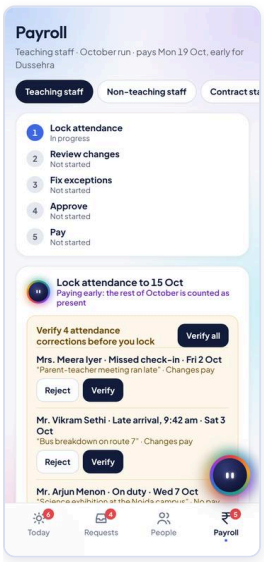

Phone · Payroll

- **What it shows:** "Separate payrolls for different staff, each with its own rules, people and pay date". Desktop has two tabs, "Payroll runs · 4" and "Payroll setup". The left list shows the four runs with step, headcount, basis, pay date, net: Teaching staff, "188 people · Monthly salary", Pays Mon 19 Oct (early for Dussehra), ₹1,50,40,000; Non-teaching staff, 94 people, Mon 19 Oct, ₹38,46,000; Contract staff, 10 people, "Fixed fee or invoice", Sat 7 Nov, ₹7,72,000; Visiting & part-time, 6 people, "Per period", Sat 31 Oct, ₹1,62,000. Footnote "Each payroll runs on its own date with its own approval." Total line "All payrolls this month: ₹1,98,20,000 net across 4 runs". Phone: four pills ("Teaching staff", "Non-teaching staff", "Contract staff", "Visiting & part-time") instead of a list; there is no Payroll setup tab on phone.
- **Five steps per run** (a stepper: "Lock attendance", "Review changes", "Fix exceptions", "Approve", "Pay"; step 1 is renamed "Collect invoices" for fee payrolls, "Count periods" for per-period, "Count sessions" or "Count days" for those bases):

1. **Lock attendance** (monthly): "Lock attendance to 15 Oct · Paying early: the rest of October is counted as present". Warning "Verify 4 attendance corrections before you lock" with the four correction rows (Verify/Reject, "Verify all"). "Lock attendance" button is dimmed and flashes "Verify the 4 attendance corrections first" until all are verified; then flashes "Attendance locked to 15 Oct · rest of the month counted as present". For contract: "9 of 10 invoices received. Mr. Gurpreet Singh's is due tomorrow; it can join the next run if late." Button "Use the 9 invoices received" -> "9 invoices locked · a late invoice joins the next run". For per-period/sessions: "Count periods taught: 278 periods by 6 people, from the timetable and class attendance", button "Use these counts" -> "Counts locked for this run".

2. **Review changes** (what changed since September): joiners from 12 Oct +₹58,400 (paid for 20 days); 1 leaver (Mr. Alok Jain, last day 30 Sep) –₹61,200; 6 confirmations (increments after probation) +₹27,600; DA arrears Jul-Sep for 193 teachers + ₹4,82,500; Leave without pay –₹6,700 (shows "3 leave issues not settled yet" and ₹0 until HR settles them); Agency invoice Sunrise Facility Services (14 housekeeping staff) ₹4,20,000; Periods taught 1–15 Oct ₹1,80,000. Button "Changes look right".
3. **Fix exceptions:** "Dhruva checked this run against September and found N things to fix." Each exception has two choices plus "Open employee". Teaching: Mr. Rahul Khanna, "Blocks payment", bank account changed 7 Oct and IFSC does not match the bank name: "Hold salary and ask him" (-> "Salary held · he has been asked to visit HR") or "Mark as verified" (-> "Verified · paid to the new account"). Mr. Deepak Verma, "Likely error", net pay 38% higher, DA arrears added twice: "Remove the duplicate" (-> "Duplicate removed · pay up 9%") or "Keep both" (-> "Kept · note added for the principal"). Non-teaching: Mr. Harish Chand, "Needs info", no UAN so PF cannot be filed: "Ask him for his UAN" (-> "Asked on WhatsApp · PF filed when it arrives") or "Pay now, file PF later" (-> "Paid · PF to be filed in November"). Contract: Sunrise Facility Services, "Check invoice", invoice is for 14 people daily but the gate log shows 13 on 3 days: "Pay ₹4,11,000 for days worked" (-> "Paying ₹4,11,000 · note sent to the agency") or "Pay the full invoice". Visiting: Ms. Ankita Sood, "Check periods", claim 52 periods, timetable and class attendance show 48: "Pay for 48 periods" (-> "Paying 48 periods · ₹19,440 net") or "Pay for 52 periods" (-> "Paying 52 periods · HoD to confirm"). The continue button reads "2 left to fix" and is disabled until all are resolved, then "Continue to approval".
4. **Approve:** "Ms. Neelam Mehra gets the summary, what changed and Dhruva's checks on her phone." Button "Send for approval" -> flash "Sent to Ms. Neelam Mehra"; the run shows "With principal"; after a few seconds the sample auto-approves ("Ms. Neelam Mehra approved Teaching staff").
5. **Pay:** "Dhruva makes the ICICI salary-account bank file for this run and sends it on the pay date." Button "Send bank file and release payslips" (or "...payment statements" for non-monthly). Flash "Teaching staff paid · 188 payslips on Mon 19 Oct, early for Dussehra"; closing line "Teaching staff paid on Mon 19 Oct, early for Dussehra · 188 payslips go out that morning."

- **Run summary panel (always visible):** People 188; Gross pay ₹1,72,10,000; Provident fund – ₹14,10,000; Professional tax – ₹37,600; Income tax (TDS) – ₹7,22,400; Net pay ₹1,50,40,000 ("Monthly salary · pays Mon 19 Oct, early for Dussehra"). Contract and visiting runs show fee/period lines and TDS 10%.
- **Payroll setup (desktop only):** list of payrolls with "Pays 1st of the month · next Mon 19 Oct, early for Dussehra"; "+ New payroll" (creates "New payroll"; Dhruva suggests "4 coaches are paid per session, but sit in contract staff or no payroll at all. Pay them per session on the 25th?" -> "Use suggestion" -> "Sports coaches set up · 4 coaches moved in"). Edit form: "Payroll name"; "Pay basis" (Monthly salary, Fixed fee or invoice, Per period, Per session, Per day); "Pay date" (1st of the month, 7th, 25th, Last working day; if the 25th is a Sunday it moves to Sat 24 Oct); "Earnings" toggles (Basic, DA, HRA, Transport, Night duty, Contract fee, Per-period rate, Per-session rate); "Deductions" (PF 12%, ESI, Professional tax, TDS on salary, TDS 2% (194C), TDS 10% (194J)); "Approval" (Principal approves; HoD confirms, principal approves; Principal approves invoices over ₹1 lakh); membership: "In this payroll · 188", "Showing 4 of 188" with "Remove" and an "Add people" list showing which payroll each person is in ("Add"); alert "Mr. Kunal Mehta (basketball coach) signed a contract on 5 Oct but isn't in any payroll, so he wouldn't be paid." with "Add to this payroll" (-> "Mr. Kunal Mehta added to..."). "Save payroll" -> "Saved · '<name>' · changes apply from the next run, <date>". Removing/adding flashes "<name> removed from / added to <payroll>".
- **Dhruva help:** pre-computes the run, compares with September, writes each exception with a recommended first choice; "What changed in pay since September?" -> net pay rises about ₹5 lakh, mostly DA arrears; two joiners add ₹58,400, one leaver takes off ₹61,200, six confirmations add ₹27,600.
- **Rules and edge cases:** steps are sequential and gated (verify corrections before lock; fix all exceptions before approval). Contract invoices over ₹1 lakh go to the principal. Staff are in exactly one payroll; unassigned people are flagged.

Hiring and onboarding (Desktop: "Hiring & onboarding" · Phone: reached from Today button "Hiring and onboarding", no tab)

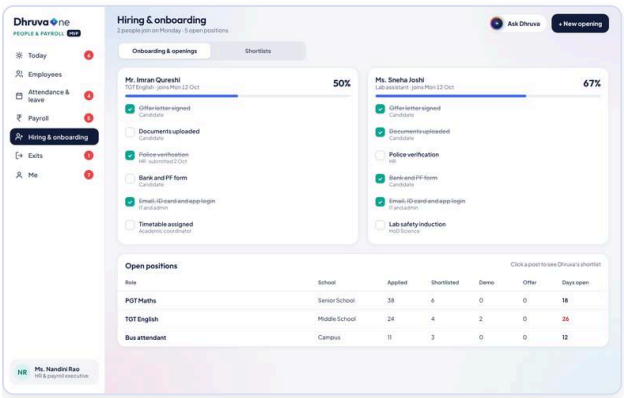

Desktop · Hiring onboarding

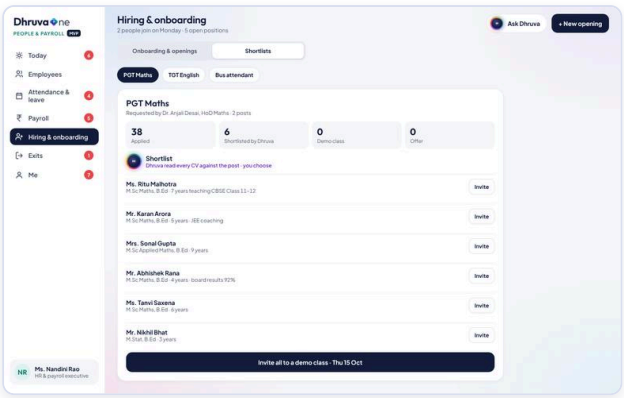

Desktop · Hiring shortlist

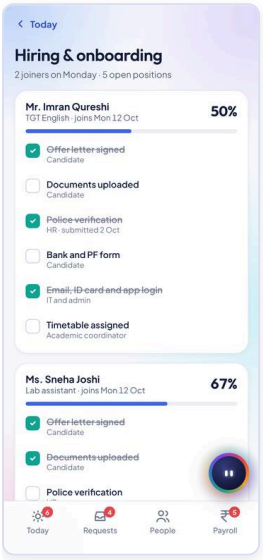

Phone · Hiring

- **What it shows:** "2 people join on Monday · 5 open positions". Two tabs on desktop ("Onboarding & openings", "Shortlists"); on phone one scroll. Joiner checklists with percentage: Mr. Imran Qureshi, TGT English, joins Mon 12 Oct, 50%: Offer letter signed (Candidate), Documents uploaded (Candidate), Police verification (HR · submitted 2 Oct), Bank and PF form (Candidate), Email, ID card and app login (IT and admin), Timetable assigned (Academic coordinator). Ms. Sneha Joshi, Lab assistant, 67%: Offer letter signed, Documents uploaded, Police verification (HR), Bank and PF form, Email ID card and app login, Lab safety induction (HoD Science). Tapping an item toggles its tick and the percentage bar updates.
- **Open positions table:** columns Role, School, Applied, Shortlisted, Demo, Offer, Days open. PGT Maths (Senior School) 38 / 6 / 0 / 0 / 18 days; TGT English (Middle School) 24 / 4 / 2 / 0 / 26 days (days open over 20 shown in red); Bus attendant (Campus) 11 / 3 / 0 / 0 / 12 days. Tap a post to see Dhruva's shortlist.
- **Shortlist:** "Requested by Dr. Anjali Desai, HoD Maths · 2 posts". Funnel: Applied 38, "Shortlisted by Dhruva" 6, Demo class 0, Offer 0. "Dhruva read every CV against the post · you choose": Ms. Ritu Malhotra (M.Sc Maths, B.Ed, 7 years teaching CBSE Class 11–12), Mr. Karan Arora (JEE coaching), Mrs. Sonal Gupta, Mr. Abhishek Rana (board results 92%), Ms. Tanvi Saxena, Mr. Nikhil Bhat. Each has "Invite" (-> "<name> invited to a demo class"); "Invite all to a demo class · Thu 15 Oct" (-> "Demo classes booked for Thu 15 Oct · the HoD is told", then "✓ All invited for Thu 15 Oct"). TGT English is requested by Mrs. Anita Joshi (HoD English); Bus attendant by the Transport in-charge (candidates: Mrs. Kamla Devi, 5 years, lives on route 7; Mrs. Sunita Rawat, first-aid trained; Mrs. Pushpa Negi).
- **Functions elsewhere:** header "+ New opening" -> "New opening: pick the post · Dhruva writes the advert"; the Today "Send reminders" button reminds joiners on WhatsApp.
- **Rules:** the HoD or in-charge who requested the post is told when demo classes are booked.

Exits (Desktop only: "Exits" · Phone: "Exits are on the desktop")

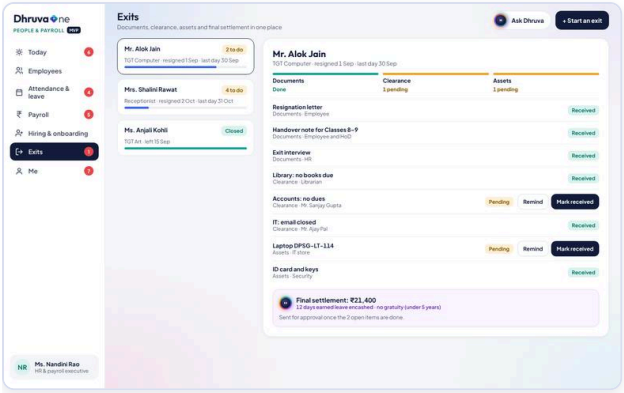

Desktop · Exits

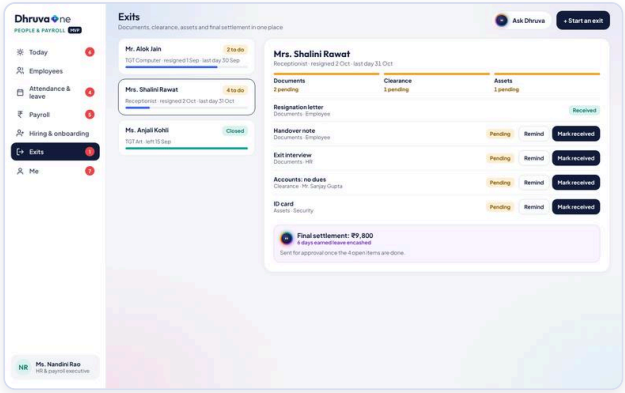

Desktop · Exit rawat

- **What it shows:** "Documents, clearance, assets and final settlement in one place". Left list: Mr. Alok Jain ("2 to do", TGT Computer, resigned 1 Sep, last day 30 Sep), Mrs. Shalini Rawat ("4 to do", Receptionist, resigned 2 Oct, last day 31 Oct), Ms. Anjali Kohli ("Closed", TGT Art, left 15 Sep, "Paid on 30 Sep"). Selected person shows three stages with "N pending" / "Done": **Documents** (Resignation letter, Handover note for Classes 8–9, Exit interview), **Clearance** (Library: no books due; Accounts: no dues, Mr. Sanjay Gupta; IT: email closed, Mr. Ajay Pal), **Assets** (Laptop DPSG-LT-114, ID card and keys). Each item shows owner ("Employee and HoD", "Librarian", "IT store", "Security") and status "Received"/"Pending". Pending items have "Remind" (-> "Reminder sent to <owner>") and "Mark received".
- **Settlement:** "Final settlement: ₹21,400 · 12 days earned leave encashed · no gratuity (under 5 years)". Shown as "Sent for approval once the 2 open items are done." When none remain, button "Send settlement for approval" -> "Final settlement sent to Ms. Neelam Mehra for approval". Mrs. Rawat: ₹9,800, 6 days earned leave encashed.
- **Header button:** "+ Start an exit" -> "Start an exit: pick the person and last day · Dhruva lists every step". From a profile, "Start exit" jumps here.
- **Rules:** final settlement is blocked until every document, clearance and asset line is received; approval goes to the Principal.

Me (Desktop: "Me" · Phone: avatar "NR" top right)

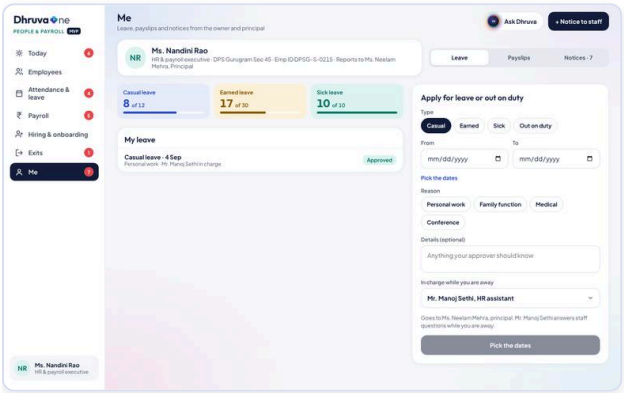

Desktop · Me

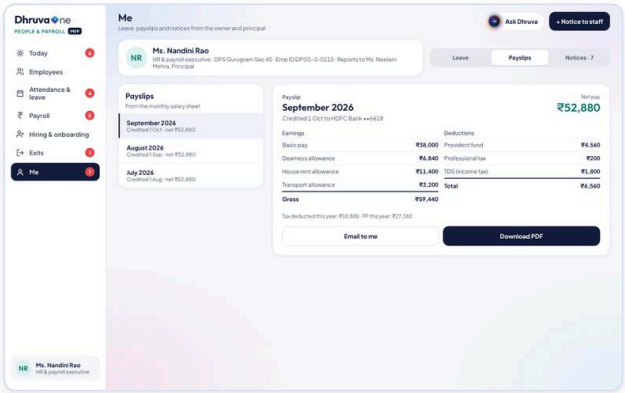

Desktop · Me payslip

- **What it shows:** HR's own staff page: "Leave, payslips and notices from the owner and principal". Leave balances: Casual leave 8 of 12, Earned leave 17 of 30, Sick leave 10 of 10; "My leave" history (Casual leave · 4 Sep, "Personal work · Mr. Manoj Sethi in charge", Approved). Tabs "Leave", "Payslips", "Notices · 7".
- **Apply for leave or out on duty:** Type pills "Casual", "Earned", "Sick", "Out on duty"; From/To date pickers (no past dates); half-day choices when one day; Reason pills "Personal work", "Family function", "Medical", "Conference"; "Details (optional)"; "In charge while you are away" (Mr. Manoj Sethi, HR assistant / Mr. Sanjay Gupta, accounts). Out on duty adds "What is the duty?" and "Where" (e.g. DPS Noida). Routing text: leave goes to Ms. Neelam Mehra (principal); more than 3 days goes to the principal then the group HR head. Submit flashes "Sent to Ms. Neelam Mehra, principal · Mr. Manoj Sethi will be in charge", or for duty "Out on duty approved by...".
- **Payslips:** From the monthly salary sheet: September 2026 "Credited 1 Oct · net ₹52,880" and earlier months; detail "Payslip September 2026 · Credited 1 Oct to HDFC Bank ••6618", Net pay ₹52,880, Earnings (Basic ₹38,000, DA ₹6,840, HRA ₹11,400, Transport ₹3,200, Gross ₹59,440), Deductions (PF ₹4,560, Professional tax ₹200, TDS ₹1,800, Total ₹6,560), "Tax deducted this year: ₹10,800 · PF this year: ₹27,360". Buttons "Email to me" ("Payslip emailed to hr@dpsggn.in") and "Download PDF".
- **Notices:** from owner and principal; some need "Confirm" and show "Confirmed · <name> can see it" once acknowledged; unread dot and count in nav badge ("Me 7").

Gaps and differences between desktop and phone

- Phone has 4 tabs (Today, Requests, People, Payroll); Hiring comes from a button on Today; Me from the avatar.
- Desktop only: Exits (phone toast "Exits are on the desktop"), Payroll setup tab and payroll list, Today's attendance tab (present by group, not marked yet, on leave today), KPI tiles, Coming up list, Headcount, smart filter tiles and "My views", employee profile with Attendance calendar and six-month payslip list (phone sheet shows summary and documents only), "+ Notice to staff", "+ Add employee", "+ Start an exit", "+ New opening".
- Phone only: pager dots on the focus card, floating Dhruva orb, bottom sheets for person and Dhruva chat.
- Shared: the same data, the same step-by-step payroll, the same decisions and messages.

OPERATIONS · DESKTOP · PHONE

Finance and Accounts

One calm screen that tells the accounts head what needs a decision today (move salary money, clear bank lines, fix Tally, approve bills), then shows the numbers; every rupee is checked, approved by a second person and posted to Tally automatically.

Who uses it. Accounts in-charge (sample: Mr. Sanjay Gupta, DPS Gurugram Sec 45, Emp ID DPSG-S-0112, reports to the principal Ms. Neelam Mehra). Works with the accounts executive (Ms. Priya Nair), the fee counter (Mr. Mohit Kalra), the accounts assistant (Mr. Anil Sharma), the principal (second approver) and the school's CA (Mr. Rakesh Bansal).

On the following pages:

- Today (Desktop: "Today" · Phone: "Home")
- Approvals (Desktop: "Approvals" with count · Phone: opened from the "Approve" tile; shown as "Today > Approvals")
- Fees (Desktop: "Fees" · Phone: "Fees" screen from the Fees tile)
- Purchase bills (Desktop: Payments > "Purchase bills" · Phone: "Bills" screen)
- Vendors (Desktop: Payments > "Vendors" · Phone: not shown, phone tapping desktop-only sections flashes "That section is on the desktop")
- Inventory (Desktop: Payments > "Inventory" · phone: not present, only the reorder alert and requisitions)
- Bank reconciliation (Desktop: Bank and Tally > "Bank reconciliation" · Phone: "Bank" tab with count)
- Tally sync (Desktop: Bank and Tally > "Tally sync" · Phone: not a screen; the Tally alert card runs "Fix and resync")
- Accounts: Vouchers, Ledgers, Setup (Desktop: "Accounts" with segments Vouchers / Ledgers / Setup · Phone: not available)
- Reports (Desktop: "Reports" hub · Phone: "Reports" tab)
- Compliance and month-end (Desktop: "Compliance and month-end" with count 3 · Phone: opened from Home "Compliance" row, screen "Compliance")
- Alerts (Phone only: "Alerts" tab with count)
- Me (Desktop: "Me" with unread count · Phone: avatar "SG" top right, screen "Me")
- Ask Dhruva (Desktop: "Ask Dhruva" button on every screen · Phone: floating orb)

Business summary

Finance in a school is a daily chain of small, risky jobs: fee money arriving by UPI, card, cash and cheque, bills to approve, vendors to pay with the right TDS, bank statements to match and a Tally file to keep in step. DhruvaOne lets the accounts in-charge start the day with "6 things need you" instead of hunting through registers. Dhruva has already matched 1,184 of 1,212 bank lines, worked out TDS on each vendor, compared each bill with its purchase order and goods receipt, and filled in the deposit slip. The accounts head only confirms or chooses. Controls are built in: nobody can approve their own entry, anything above ₹2 L also needs the principal, every action is logged, and every voucher reaches Tally with its receipt or bill number so auditors can trace it. Month-end close, statutory filings (TDS, PF, ESI, GST, ITR-7) and the year lock are guided checklists, not memory work. The phone version is a lighter "pocket CFO": approve, check the bank, see cash and dues, and ask Dhruva questions.

Daily story (one thing at a time)

Friday 9 October, 9 am. "Good morning, Mr. Gupta · what needs you first, then the numbers." The page opens on a single card, "6 THINGS NEED YOU · 1 OF 6":

1. **Move ₹1.55 Cr to the salary account by Fri 16 Oct** (salaries of ₹1.98 Cr go out Mon 19 Oct, early, before Dussehra; ICICI salary account has ₹48 L). Button "Schedule transfer". Result: card turns to "Salary account funded · Transfer scheduled for Fri 16 Oct · contra voucher sent to Tally", flash "₹1.55 Cr transfer from HDFC to ICICI scheduled for Fri 16 Oct · principal approves on her phone".
2. **Bank reconciliation: 28 lines need you** (button "Review" opens the bank screen).
3. **3 vouchers didn't reach Tally** (button "Fix and resync": a missing ledger, an old GSTIN, a missing cost centre; all three fixed in one tap).

4. **Deposit yesterday's counter cash and cheques** (₹1,84,500 cash and 4 cheques; "Make deposit slip").
5. **2 purchase bills to approve** (button "Review bills"; 1 has a higher rate).
6. **3 items below reorder level** (A4 paper 38 reams, lab gloves 6 boxes, printer toner 2; "Raise requisitions"). "Later ›" moves to the next card without doing it; the list below the card ("Up next") shows the following items with a chevron; "See all 6 for today · 0 done" expands the whole list. Counts fall as items are done (6 to 5, etc.) and the sidebar/tab badges follow. Below the task card the numbers appear: Approvals waiting, month-end progress, assets, liabilities, income and expense, recent vouchers, and the "Cash coming and going" calendar. When all six are done the card reads as finished and the person can go through Approvals, Fees and Reports.

Screens

Today (Desktop: "Today" · Phone: "Home")

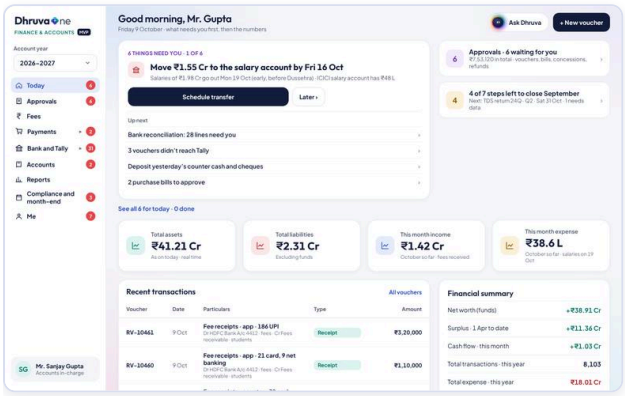

Desktop · Today

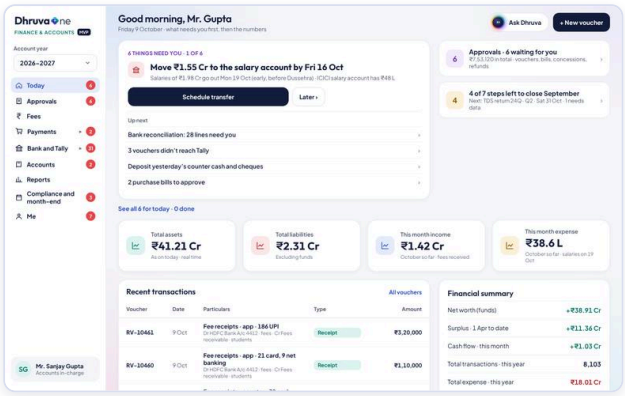

Desktop · Start

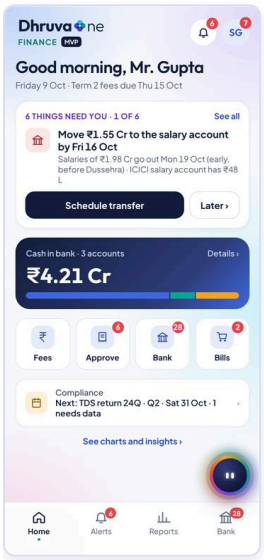

Phone · Home

- What it shows (desktop): header "Good morning, Mr. Gupta", buttons "Ask Dhruva" and "+ New voucher"; the one-at-a-time task card; two tiles "Approvals · 6 waiting for you · ₹7,53,120 in total · vouchers, bills, concessions, refunds" and "4 of 7 steps left to close September · Next: TDS return 24Q · Q2 · Sat 31 Oct · 1 needs data"; KPI tiles "Total assets ₹41.21 Cr (as on today · real time)", "Total liabilities ₹2.31 Cr (excluding funds)", "This month income ₹1.42 Cr (October so far · fees received)", "This month expense ₹38.6 L (October so far · salaries on 19 Oct)"; "Recent transactions" table (Voucher, Date, Particulars, Type, Amount) with link "All vouchers"; "Financial summary" (Net worth (funds) +₹38.91 Cr, Surplus 1 Apr to date +₹11.36 Cr, Cash flow this month +₹1.03 Cr, Total transactions this year 8,103, Total expense this year ₹18.01 Cr); "Cash coming and going" (Mon 12 Oct Term 2 fee reminders second round + ₹42 L expected; Thu 15 Oct Diesel – ₹2.1 L; Fri 16 Oct transfer to salary account – ₹1.55 Cr; Mon 19 Oct October salaries – ₹1.98 Cr; Sat 7 Nov TDS for October – ₹8.5 L).
- What it shows (phone): header "Good morning, Mr. Gupta · Friday 9 Oct · Term 2 fees due Thu 15 Oct", bell with count (6) and avatar "SG" with notice count (7); the same one-at-a-time card with "See all"; "Cash in bank · 3 accounts ₹4.21 Cr" with "Details ›"; four quick tiles "Fees", "Approve (6)", "Bank (28)", "Bills (2)"; "Compliance: Next: TDS return 24Q · Q2 · Sat 31 Oct · 1 needs data ›"; link "See charts and insights ›". Bottom tabs: Home, Alerts (6), Reports, Bank (28).
- Functions: task buttons as listed above; "Later ›"; "See all"; tile taps (Approvals tile goes to Approvals; month-end tile goes to Compliance and month-end); "All vouchers" goes to Accounts; "+ New voucher" opens the voucher form (see Accounts); on

phone each quick tile opens its screen (Bank is a tab; Fees, Approve, Bills open as pushed screens with a back link "Today"/"Home").

- Interactions: tapping an action runs it at once (no extra confirmation) and shows a toast for about 2.6 seconds; the card re-renders to a "done" state with a tick. Phone cash card opens a bottom sheet drill-down (see Reports/insights below).
- Dhruva help: Dhruva prepared every card (reconciliation suggestions, Tally fixes, deposit slip, bill matching). "Ask Dhruva" opens a panel "Answers from your records, with sources" with three suggested questions (see Ask Dhruva).
- Rules & edge cases: counts are live (reconciliation shows "HDFC September reconciled · Books match the bank · report sent to Tally" at zero; Tally shows "Tally in sync · All vouchers posted · next sync 9:30 am"). The list is ordered by urgency (red salary transfer first).

Approvals (Desktop: "Approvals" with count · Phone: opened from the "Approve" tile; shown as "Today > Approvals")

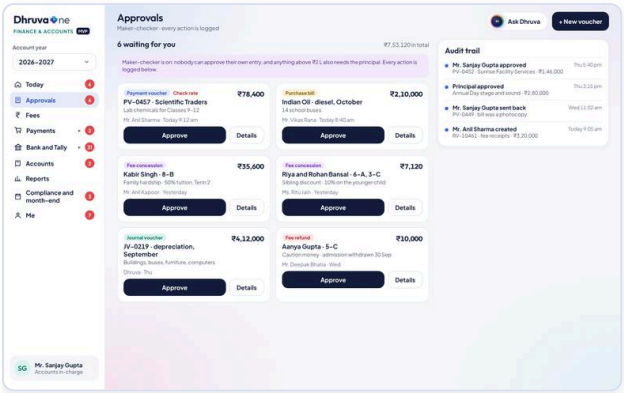

Desktop · Approvals

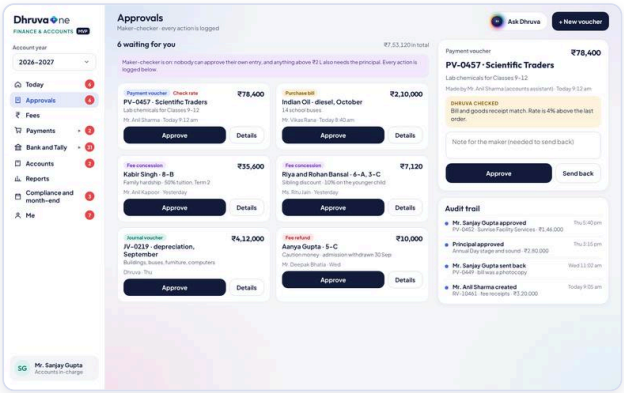

Desktop · Approval detail

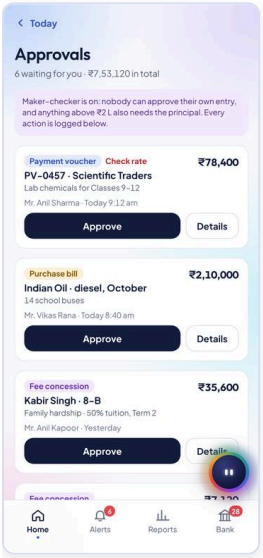

Phone · Approvals

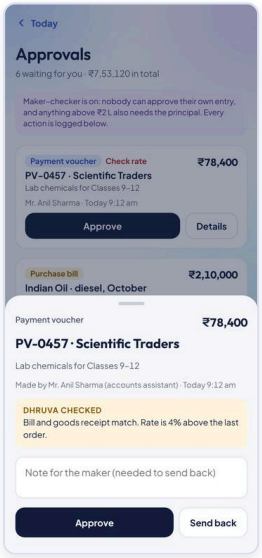

Phone · Approval sheet

- What it shows: "6 waiting for you · ₹7,53,120 in total" and the rule banner "Maker–checker is on: nobody can approve their own entry, and anything above ₹2 L also needs the principal. Every action is logged below." Six cards, each with a type chip, title, purpose, amount, who made it and when:
- Payment voucher PV-0457 · Scientific Traders, lab chemicals for Classes 9–12, ₹78,400, Mr. Anil Sharma (accounts assistant) today 9:12 am; flagged "Check rate" (rate 4% above last order).
- Purchase bill, Indian Oil diesel October, 14 buses, ₹2,10,000, Mr. Vikas Rana (transport in-charge); above ₹2 L so the principal approves after.
- Fee concession, Kabir Singh 8–B, family hardship 50% tuition Term 2, ₹35,600, Mr. Anil Kapoor (class teacher); within the 50% policy limit, income certificate attached; after the accounts head checks, the principal recommends and the owner gives final approval.
- Fee concession, Riya and Rohan Bansal 6–A / 3–C, sibling discount 10%, ₹7,120, Ms. Ritu Jain (admissions).
- Journal voucher JV-0219 depreciation September, ₹4,12,000, created by Dhruva from the fixed-asset register (needed to close September; above ₹2 L).
- Fee refund, Aanya Gupta 5–C, caution money, admission withdrawn 30 Sep, ₹10,000, Mr. Deepak Bhatia (front office); bank details verified. A running "Audit trail" lists recent actions (e.g. "Mr. Sanjay Gupta approved PV-0452 · Sunrise Facility Services ·

₹1,46,000 · Thu 5:40 pm", "Principal approved Annual Day stage and sound · ₹2,80,000", "Mr. Sanjay Gupta sent back PV-0449 · bill was a photocopy", "Mr. Anil Sharma created RV-10461").

- Functions: per card "Approve" and "Details". Details opens a panel (desktop: inline below the list; phone: bottom sheet) with the maker, an amber/green "DHRUVA CHECKED" note (e.g. "Bill and goods receipt match. Rate is 4% above the last order."), a note box "Note for the maker (needed to send back)", and buttons "Approve" and "Send back".
- Interactions (verified): tap "Approve" on a card: it greys to "✓ Approved" and the count and total drop; toast "Approved · Mr. Anil Sharma is told" (maker is notified). For an item above ₹2 L (Indian Oil, JV-0219) the card shows "✓ Approved · with the principal" and the toast reads "Approved · sent to the principal for the second approval". "Send back" in Details marks the card "↩ Sent back" (phone verified: count went 6 to 5, ₹7,53,120 to ₹6,74,720) and toasts "Sent back to Mr. Anil Sharma with your note"; the note is written into the audit trail. A new line "You approved / You sent back · item · amount · Just now" is added at the top of the audit trail (6 lines shown).
- Dhruva help: every card carries Dhruva's pre-check; the depreciation journal is computed by Dhruva at the asset-register rates.
- Rules & edge cases: maker-checker (no self-approval); ₹2 L two-level rule; concessions follow a chain (accounts check, principal recommends, owner approves) and are also sent from the Fees screen; sending back requires a note.

Fees (Desktop: "Fees" · Phone: "Fees" screen from the Fees tile)

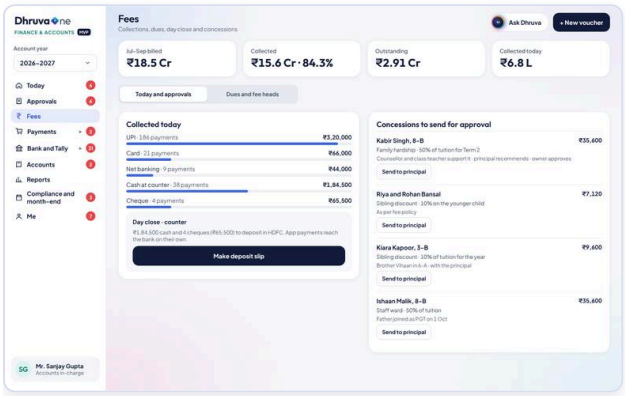

Desktop · Fees

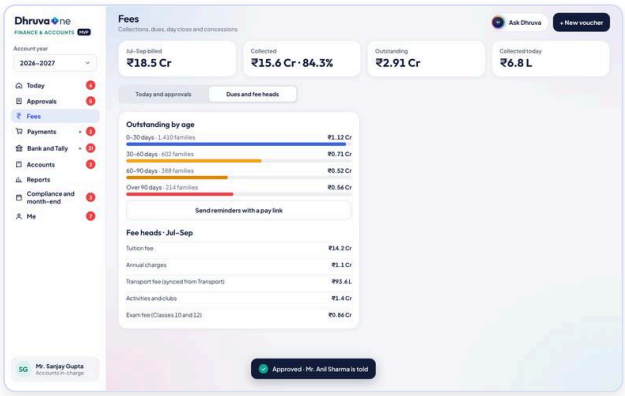

Desktop · Fees dues

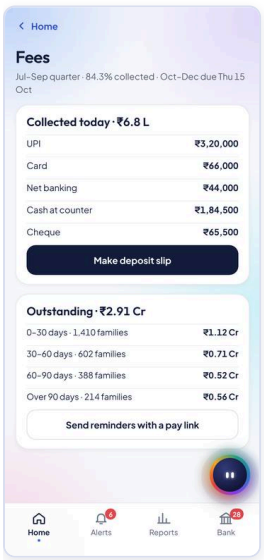

Phone · Fees

- What it shows: Jul–Sep billed ₹18.5 Cr, collected ₹15.6 Cr (84.3%), outstanding ₹2.91 Cr, collected today ₹6.8 L. Two segments (desktop): "Today and approvals" and "Dues and fee heads".
- Today: "Collected today" by mode: UPI 186 payments ₹3,20,000; Card 21 ₹66,000; Net banking 9 ₹44,000; Cash at counter 38 ₹1,84,500; Cheque 4 ₹65,500. "Day close · counter": "₹1,84,500 cash and 4 cheques (₹65,500) to deposit in HDFC. App payments reach the bank on their own." Button "Make deposit slip". "Concessions to send for approval": Kabir Singh 8–B ₹35,600 (hardship; counsellor and class teacher support it, principal recommends, owner approves), Riya and Rohan Bansal ₹7,120 (sibling discount, as per policy), Kiara Kapoor 3–B ₹9,600 (sibling, brother Vihaan in 6–A), Ishaan Malik 8–B ₹35,600 (staff ward 50%, father joined as PGT on 1 Oct). Each has "Send to principal".
- Dues: "Outstanding by age" 0–30 days ₹1.12 Cr (1,410 families), 30–60 ₹0.71 Cr (602), 60–90 ₹0.52 Cr (388), over 90 days ₹0.56 Cr (214); button "Send reminders with a pay link"; "Fee heads · Jul–Sep": Tuition fee ₹14.2 Cr, Annual charges ₹1.1 Cr, Transport fee (synced from Transport) ₹93.6 L, Activities and clubs ₹1.4 Cr, Exam fee (Classes 10 and 12) ₹0.86 Cr.

- Functions / interactions: "Make deposit slip" turns the card into a done state and toasts "Deposit slip ready to print · contra voucher sent to Tally". "Send to principal" on a concession toasts "Sent to Ms. Neelam Mehra · the journal posts to Tally once she approves" and the row shows done. "Send reminders with a pay link" changes to "✓ Reminders sent to 2,614 families" with toast "WhatsApp reminders with a pay link sent · 90+ day families get a call list for the counter".
- Dhruva help: slip pre-filled for the HDFC deposit; reminders drafted with a pay link; the 90+ day group becomes a call list.
- Rules & edge cases: app payments need no deposit; concessions never post until the principal (and owner for hardship) approve; sibling and staff-ward concessions follow the fee policy. Phone shows the same blocks stacked (collected today, deposit, outstanding by age, reminders) under "Jul–Sep quarter · 84.3% collected · Oct–Dec due Thu 15 Oct".

Purchase bills (Desktop: Payments > "Purchase bills" · Phone: "Bills" screen)

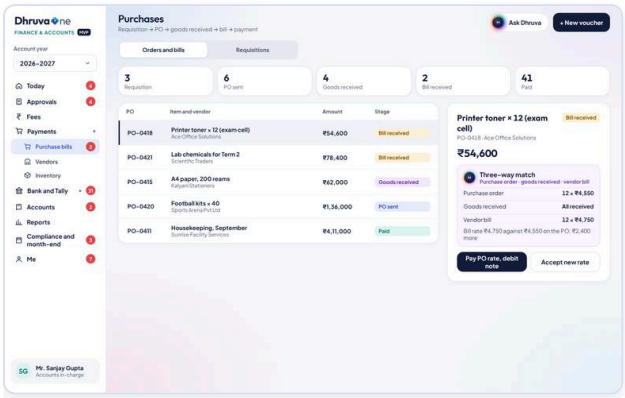

Desktop · Purchases threeway

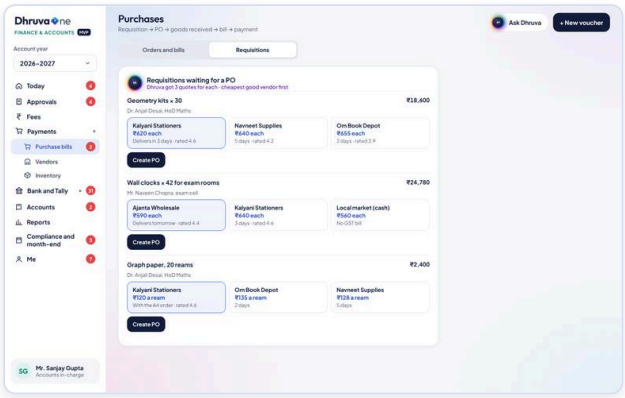

Desktop · Requisitions quotes

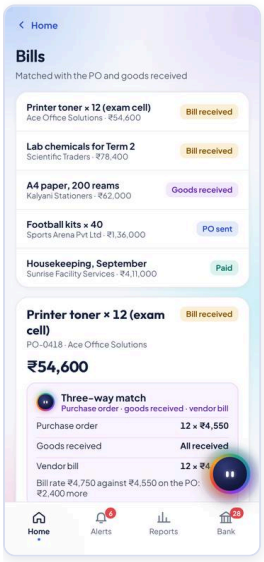

Phone · Bills threeway

- What it shows: "Requisition → PO → goods received → bill → payment" with stage counts (Requisition 3, PO sent 6, Goods received 4, Bill received 2, Paid 41). Segments "Orders and bills" and "Requisitions". List: PO-0418 Printer toner × 12 (exam cell) Ace Office Solutions ₹54,600 Bill received; PO-0421 Lab chemicals for Term 2 Scientific Traders ₹78,400 Bill received; PO-0415 A4 paper 200 reams Kalyani Stationers ₹62,000 Goods received (190 of 200 reams received, bill should be for 190); PO-0420 Football kits × 40 Sports Arena ₹1,36,000 PO sent (approved by principal, over ₹50,000, delivery due 15 Oct); PO-0411 Housekeeping September Sunrise ₹4,11,000 Paid (paid 27 Sep, TDS 2% deducted).
- Functions: pick a row to see the "Three-way match": Purchase order 12 × ₹4,550, Goods received "All received", Vendor bill 12 × ₹4,750, and the alert "Bill rate ₹4,750 against ₹4,550 on the PO: ₹2,400 more". Buttons for a mismatch: "Pay PO rate, debit note" and "Accept new rate". A clean match shows an approve button (flash "Purchase voucher posted to Tally · payment scheduled for Fri 16 Oct with TDS").
- Interactions (verified on phone): "Accept new rate" sets the PO to Paid, hides the buttons, text "Nothing to approve at this stage. Approved bills post to Tally as purchase vouchers; payments as payment vouchers, with TDS."; toast "New rate accepted · purchase voucher posted". "Pay PO rate, debit note" toasts "Approved at the PO rate · debit note of ₹2,400 sent to Ace Office Solutions". Requisitions tab: each request (Geometry kits × 30, HoD Maths, ₹18,600; Wall clocks × 42, exam cell, ₹24,780; Graph paper 20 reams ₹2,400) shows 3 vendor quotes (e.g. Kalyani ₹620 each delivers in 3 days rated 4.6; Navneet ₹640; Om Book Depot ₹655); the lowest/best is pre-selected, tapping another quote selects it, and the button sends the PO: toast "PO sent to <vendor> on email and WhatsApp" and the row shows "✓ PO sent to <vendor>".
- Dhruva help: matches bill to PO and goods receipt, spots rate and quantity differences, gathers 3 quotes.

- Rules & edge cases: POs above ₹50,000 need the principal; the mismatch is never silent; a "Local market (cash)" quote is flagged "No GST bill".

Vendors (Desktop: Payments > "Vendors" · Phone: not shown, phone tapping desktop-only sections flashes "That section is on the desktop")

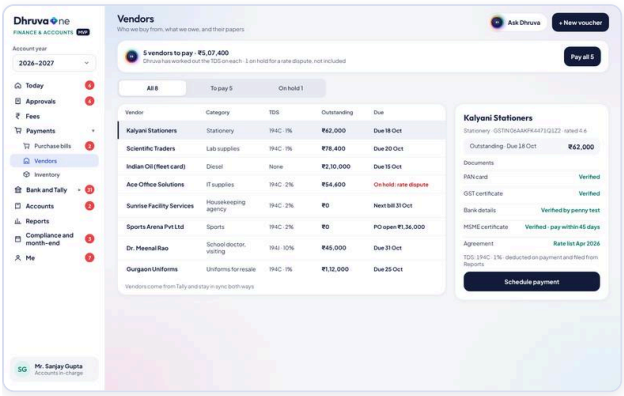

Desktop · Vendors

- What it shows: "5 vendors to pay · ₹5,07,400 · Dhruva has worked out the TDS on each · 1 on hold for a rate dispute, not included"; button "Pay all 5"; filter segments "All 8 / To pay 5 / On hold 1". Table (Vendor, Category, TDS, Outstanding, Due): Kalyani Stationers 194C 1% ₹62,000 due 18 Oct; Scientific Traders 194C 1% ₹78,400 due 20 Oct; Indian Oil (fleet card) none ₹2,10,000 due 15 Oct; Ace Office Solutions 194C 2% ₹54,600 on hold (rate dispute); Sunrise Facility Services 194C 2% ₹0 next bill 31 Oct; Sports Arena 194C 2% ₹0 PO open ₹1,36,000; Dr. Meenal Rao (visiting doctor) 194J 10% ₹45,000 due 31 Oct; Gurgaon Uniforms 194C 1% ₹1,12,000 due 25 Oct. Footer "Vendors come from Tally and stay in sync both ways".
- Functions: select a vendor to see GSTIN, rating, outstanding and "Documents": PAN card Verified, GST certificate Verified, Bank details "Verified by penny test", MSME certificate "Verified · pay within 45 days", Agreement "Rate list Apr 2026". TDS line: "194C · 1% · deducted on payment and filed from Reports". "Schedule payment" (for a vendor with a balance); for a vendor on hold the button leads to the bill screen.
- Interactions: "Pay all 5" toasts "5 payments scheduled · TDS deducted · vouchers sent to Tally" and every row shows Paid with ₹0; single "Schedule payment" toasts "Payment of ₹62,000 scheduled · TDS deducted · payment voucher sent to Tally".
- Rules & edge cases: held vendors are excluded from "Pay all"; MSME vendors must be paid within 45 days (flagged); TDS section and rate come from the vendor master.

Inventory (Desktop: Payments > "Inventory" · phone: not present, only the reorder alert and requisitions)

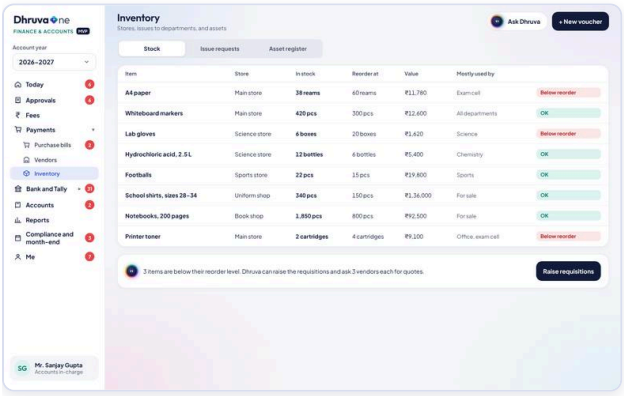

Desktop · Inventory stock

- What it shows: tabs "Stock", "Issue requests", "Asset register". Stock table (item, store, in stock, reorder at, value, mostly used by, status): A4 paper 38 reams (reorder 60) Below reorder; Whiteboard markers 420 pcs OK; Lab gloves 6 boxes (20) Below reorder; Hydrochloric acid 12 bottles OK; Footballs 22 OK; School shirts 340 (uniform shop, for sale) OK; Notebooks 1,850 (book shop) OK; Printer toner 2 cartridges (4) Below reorder. Banner "3 items are below their reorder level. Dhruva can raise the requisitions and ask 3 vendors each for quotes." with "Raise requisitions".
- Issue requests: "40 whiteboard markers · Mrs. Geeta Rao, Primary", "10 reams A4 paper · Mr. Naveen Chopra, exam cell", "2 boxes lab gloves · Mrs. Meenakshi Rao, Science"; each has an issue button; toast "<item> issued · stock updated".
- Asset register: Laptops 64 (₹28.8 L, 3 due for replacement), Projectors and smart boards 98 (₹41.2 L, 2 need repair), Buses 25 (₹4.6 Cr, insurance and fitness tracked in Transport), Lab equipment 412 (₹18.4 L, physical check due Mar 2027), Furniture 3,420 (₹62.0 L).

- Interactions: "Raise requisitions" toasts "3 requisitions raised · Dhruva asked 3 vendors each for quotes", chips change to "Requisition raised".

Bank reconciliation (Desktop: Bank and Tally > "Bank reconciliation" · Phone: "Bank" tab with count)

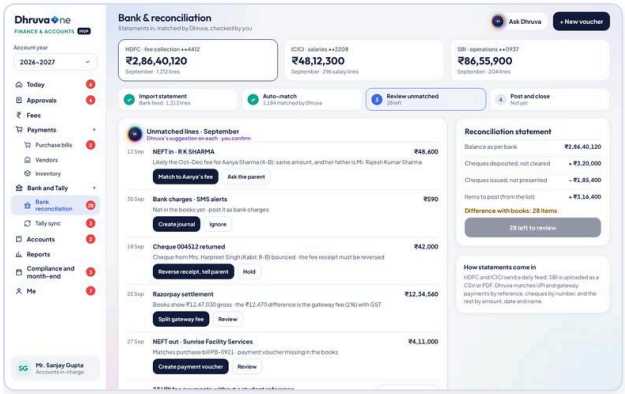

Desktop · Bank reconciliation

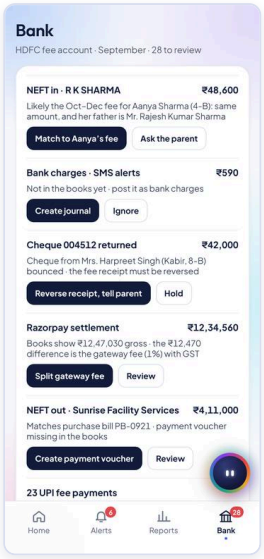

Phone · Bank

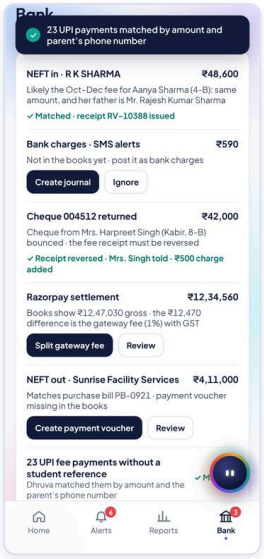

Phone · Bank after actions

- What it shows: three account cards (HDFC fee collection ••4412 ₹2,86,40,120, September 1,212 lines; ICICI salaries ••2208 ₹48,12,300, 296 salary lines; SBI operations ••0937 ₹86,55,900, 204 lines). A four-step bar: "Import statement · Bank feed · 1,212 lines" ✓, "Auto-match · 1,184 matched by Dhruva" ✓, "Review unmatched · 28 left", "Post and close · Not yet". Right panel "Balance as per bank ₹2,86,40,120; Cheques deposited, not cleared + ₹3,20,000; Cheques issued, not presented – ₹1,85,400; Items to post" and "Difference with books: N items".
- Unmatched items, each with Dhruva's suggestion and two buttons (phone and desktop identical):

1. 12 Sep NEFT in · R K SHARMA ₹48,600: "Likely the Oct–Dec fee for Aanya Sharma (4–B): same amount, and her father is Mr. Rajesh Kumar Sharma" → "Match to Aanya's fee" (result "Matched · receipt RV-10388 issued") or "Ask the parent".
2. 30 Sep Bank charges · SMS alerts ₹590, not in books → "Create journal" (JV-0215 posted) or "Ignore".
3. 18 Sep Cheque 004512 returned ₹42,000 (Mrs. Harpreet Singh, Kabir 8–B) → "Reverse receipt, tell parent" (result "Receipt reversed · Mrs. Singh told · ₹500 charge added") or "Hold".
4. 25 Sep Razorpay settlement ₹12,34,560 vs books ₹12,47,030 gross; ₹12,470 gateway fee (1%) with GST → "Split gateway fee" (posted to bank charges) or "Review".
5. 27 Sep NEFT out · Sunrise Facility Services ₹4,11,000 matches PB-0921, payment voucher missing → "Create payment voucher" (PV-0447 created) or "Review".
6. Group: "23 UPI fee payments without a student reference · Dhruva matched them by amount and the parent's phone number" → "Accept 23 matches" (toast "23 UPI payments matched by amount and parent's phone number").

- Interactions (verified on phone): each action turns the item into a "✓ …" line and the "to review" count falls (28 to 27 after the first match; 3 left after items 1, 3 and the group). The second button leaves it "Left for later". When count reaches 0, "Post and close September" becomes active; pressing it toasts "September closed · bank reconciliation statement saved and sent to Tally" and the step becomes "Done". Phone shows the list in the same order with the header "HDFC fee account · September · 28 to review" and no account switcher.
- Dhruva help: auto-matches (parent name, amount, phone), explains differences, drafts the parent message on a bounced cheque.
- Rules & edge cases: a bounced cheque reverses the receipt and adds a ₹500 charge; "Ignore" and "Hold" do not post anything; ICICI and SBI are separate feeds (SBI by statement upload).

Tally sync (Desktop: Bank and Tally > "Tally sync" · Phone: not a screen; the Tally alert card runs "Fix and resync")

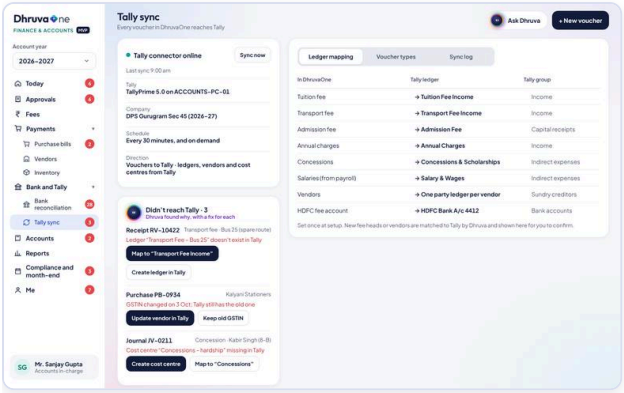

Desktop · Tally sync

- What it shows: "Tally connector online · Sync now · Last sync 9:00 am"; connection card (Tally TallyPrime 5.0 on ACCOUNTS-PC-01; Company DPS Gurugram Sec 45 (2026-27); Schedule every 30 minutes, and on demand; Direction vouchers to Tally, ledgers, vendors and cost centres from Tally). "Didn't reach Tally · 3" with a fix for each: Receipt RV-10422 Transport fee Bus 25: ledger doesn't exist → "Map to 'Transport Fee Income'" or "Create ledger in Tally"; Purchase PB-0934 Kalyani Stationers: GSTIN changed on 3 Oct → "Update vendor in Tally" or "Keep old GSTIN"; Journal JV-0211 Concession Kabir Singh: cost centre missing → "Create cost centre" or "Map to 'Concessions'". Sub-tabs: "Ledger mapping" (Tuition fee → Tuition Fee Income, Income; Transport fee; Admission fee → Capital receipts; Annual charges; Concessions → Concessions & Scholarships, Indirect expenses; Salaries (from payroll) → Salary & Wages; Vendors → one party ledger per vendor, Sundry creditors; HDFC fee account → HDFC Bank A/c 4412), "Voucher types" (Receipts 412, Payments 38, Purchases 21, Journals 9, Contra 3, with notes), "Sync log" (9:00 am 24 sent 0 failed; 8:30 am 31 sent 3 failed; 8:00 am 18 sent, 2 new ledgers from Tally; Yesterday 6 pm day closed, 412 vouchers, trial balance matches).
- Interactions: "Sync now" changes to "Synced just now", toast "Synced with Tally · 6 vouchers sent · 0 failed". Each fix button marks the item "✓ Fixed · posted to Tally"; the Today "Fix and resync" does all three (toast "3 fixed · resynced with Tally · 0 failed"). Footer: "Set once at setup. New fee heads or vendors are matched to Tally by Dhruva and shown here for you to confirm."

Accounts: Vouchers, Ledgers, Setup (Desktop: "Accounts" with segments Vouchers / Ledgers / Setup · Phone: not available)

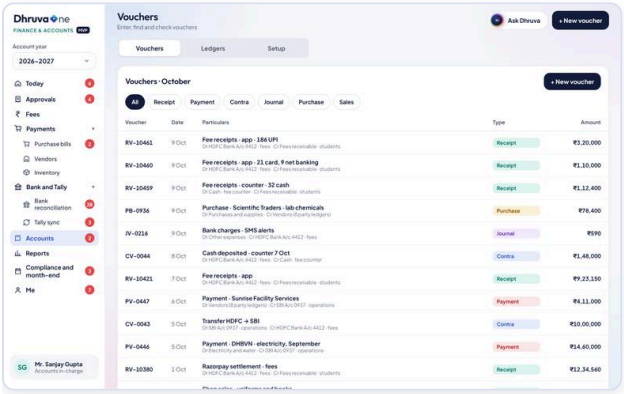

Desktop · Accounts vouchers

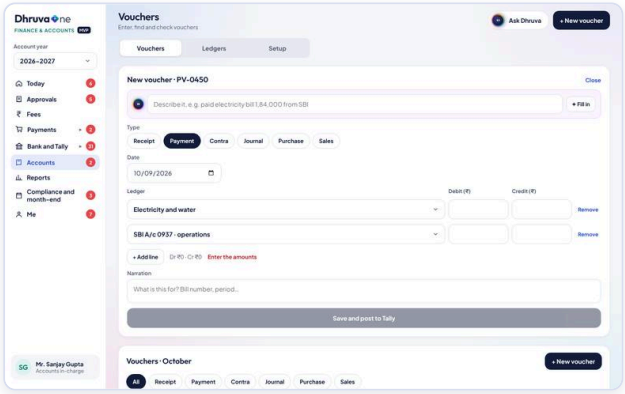

Desktop · New voucher

- Vouchers: "Vouchers · October" table with filters All, Receipt, Payment, Contra, Journal, Purchase, Sales; rows such as RV-10461 Fee receipts · app · 186 UPI Dr HDFC Cr Fees receivable ₹3,20,000; PV-0446 DHBVN electricity ₹14,60,000; CV-0043 Transfer HDFC → SBI ₹10,00,000; SV-3311 shop sales ₹21,600. The tab badge shows new ledger items needing mapping.
- "+ New voucher" (also in the header on every screen): form "New voucher · PV-0450" with a type picker (Receipt, Payment, Contra, Journal, Purchase, Sales; auto-numbering), date, ledger lines with Debit/Credit and "Remove", "Add line", a live total "Dr … · Cr …" and balance check ("Enter the amounts" / "✓ Balanced" / "Difference ₹x"), narration, and "✦ Fill in": type a sentence such as "paid electricity bill 1,84,000 from SBI" and Dhruva fills the ledgers (toast "Dhruva filled the voucher · check the ledgers and save"; with no amount the toast says "Add an amount, e.g. 'paid electricity bill 1,84,000 from SBI'"). Save only enabled when balanced; toast "<no> saved · posted to the ledgers and sent to Tally" and the row appears in the list marked new.
- Ledgers: pills All 30–odd, Assets, Liabilities, Income, Expenses, Funds; ledger list with group, balance and Dr/Cr; detail pane with opening balance, GST/TDS applicability, "In Tally as … · synced", a "report" link that opens the Ledger Report, and "New ledger" (name + group; empty name flashes "Give the ledger a name"; success "Ledger created · it reaches Tally at the next sync").

- Setup list (set once; "Dhruva keeps them in line with Tally"): Ledger mapping (2 new items need a ledger: "Annual Day costume (new fee head)" and "Zoo trip · Class 2 (new fee head)", each with a confirm button, toast "Mapped · ledger created here and in Tally"), Voucher types (numbering and Tally posting), Account year (financial years 2026–27 current, 2025–26 closed and audited 28 Jul 2026, 2024–25 closed; twelve month tiles Locked/Open · current/Future; button to lock September, toast "September locked · no one can post or change September vouchers"; button to create 2027–28, toast "2027–28 created · closing balances carry forward on 1 Apr 2027"), Account main (Delhi Public School Society, registered society, PAN, TAN, GSTIN for uniform and book shop only, 12A and 80G, books begin 1 Apr 2026, Tally company, cost centres Primary, Middle, Senior, Transport, Administration, three bank accounts; edit toasts "Account main is edited by the group finance head and audited each year"), Ledger groups (add group: name + under which main group; "Group created · also created in Tally at the next sync"), Main groups (Funds, Assets, Liabilities, Income, Expenses with group/ledger counts and balances).
- Rules: Account year selector at the top of every page ("2026–2027" / "2025–2026 (closed)"); choosing the closed year toasts "2025–26 is closed and audited · view only".

Reports (Desktop: "Reports" hub · Phone: "Reports" tab)

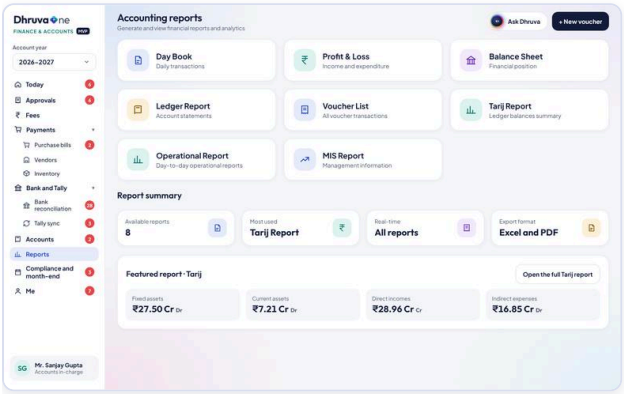

Desktop · Reports hub

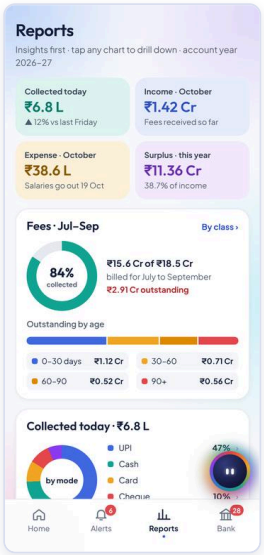

Phone · Reports

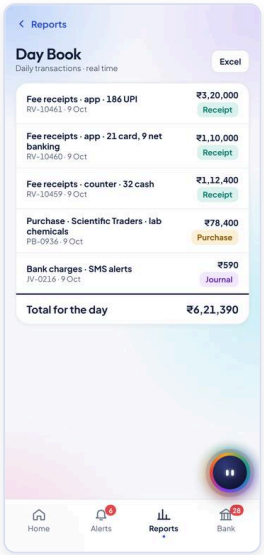

Phone · Report daybook

Phone · Drill hdfc

- Desktop hub: eight report cards (Day Book, Profit & Loss, Balance Sheet, Ledger Report, Voucher List, Tarij Report, Operational Report, MIS Report) plus a summary strip (Available reports 8; Most used Tarij Report; Real-time; Export format Excel and PDF) and a featured Tarij block (Fixed assets ₹27.50 Cr Dr, Current assets ₹7.21 Cr Dr, Direct incomes ₹28.96 Cr Cr, Indirect expenses ₹16.85 Cr Dr) with "Open the full Tarij report". Each opened report has "Back", and buttons for Excel and PDF (toasts "<Report> exported to Excel" / "<Report> saved as PDF"). Day Book shows the day's vouchers with a total; P&L and Balance Sheet group by main group and show "Surplus 38.7% of income" and a balanced check; Ledger Report has a ledger picker (HDFC, SBI, Vendors) with running balance; Voucher List has type pills; Tarij is the trial balance (Dr = Cr ₹59,22,01,620); Operational Report shows the week's collection bars, pending items, and statutory dues; MIS Report shows fee realisation 84.3%, cost per student, salaries ÷ income, surplus margin, income vs expense by month Apr to Sep and budget vs actual.

- Not reachable in the current desktop Reports hub (defined in the design but superseded by the eight-card hub; mention only as "also drafted"): segments "Income and expenses", "Statutory dues" (TDS Oct ₹8,45,600 Sat 7 Nov; PF ₹18,10,000 Sun 15 Nov; ESI ₹1,05,000; Professional tax ₹59,400 Sat 31 Oct; GSTR-1 ₹21,600 Wed 11 Nov, "School fees are exempt; uniforms and books are not"), "Budget vs actual" (Academics 64%, Sports 81%, IT 92% shown red, Transport 55%, Maintenance 71%, Events 38%).
- Phone "Reports" is "Insights first · tap any chart to drill down · account year 2026–27": KPI tiles Collected today ₹6.8 L (▲ 12% vs last Friday), Income October ₹1.42 Cr, Expense October ₹38.6 L, Surplus this year ₹11.36 Cr (38.7% of income); "Fees · Jul–Sep" ring 84% (₹15.6 Cr of ₹18.5 Cr) with "By class ›"; "Outstanding by age" bars; "Collected today ₹6.8 L by mode" donut (UPI 47%, Cash 27%, Card 10%, Cheque 10%, Net banking 6%); "Fees collected this week" bars Mon 9.8 L to Fri 6.8 L; "Income and expenses" Apr to Sep green/amber; "Coming up" calendar; and the same eight report cards below (phone Day Book opens with an "Excel" button).
- Drill-down (phone, verified): tap any chart or "Cash in bank › Details" and a bottom sheet opens with breadcrumbs, a total and bars. Examples: Cash in bank → HDFC / SBI / ICICI → the account's October entries (e.g. Razorpay settlement ₹12.35 L in, Transfer to SBI ₹10.00 L out) and a button "Reconcile this account" which jumps to the Bank tab; Collected today → mode → by class group; Income October → head → by school section; Expenses October → six heads → vouchers; Fees Jul–Sep → class group → section → families due, largest first (Mr. Rakesh Bansal ₹72,400 and so on) with "Send WhatsApp reminders to all"; Outstanding by age → bucket → families, with "Send reminders with a pay link" or "Add all 214 to the counter call list" for 90+; every sheet has "‹ Back one level" and Close.
- Dhruva help: report data is real-time; "Ask Dhruva" answers questions from the same books.

Compliance and month-end (Desktop: "Compliance and month-end" with count 3 · Phone: opened from Home "Compliance" row, screen "Compliance")

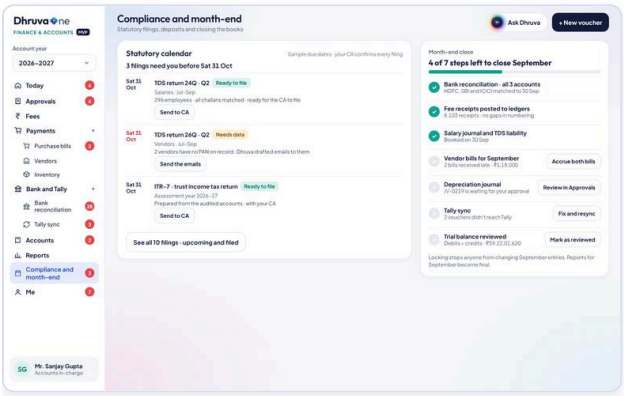

Desktop · Compliance monthend

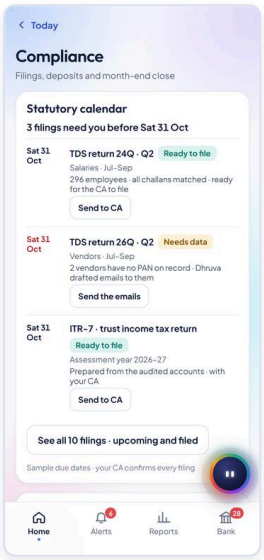

Phone · Compliance

- What it shows: "Statutory calendar · Sample due dates · your CA confirms every filing · 3 filings need you before Sat 31 Oct": TDS return 24Q Q2 (salaries, 296 employees, all challans matched) "Ready to file"; TDS return 26Q Q2 (vendors, "2 vendors have no PAN on record · Dhruva drafted emails to them") "Needs data"; ITR-7 trust income tax return AY 2026–27 "Ready to file". "See all 10 filings · upcoming and filed" reveals TDS deposit October (about ₹8.5 L, Dhruva reminds on 5 Nov), GSTR-1 October (about ₹18.4 L outward supplies), PF ECR (296 members), ESI (44 members), GSTR-3B 20 Nov, and filed ones (Form 10B filed 28 Sep; TDS deposit Sep paid 6 Oct, challan 00412).
- "Month-end close · 4 of 7 steps left to close September": Bank reconciliation all 3 accounts ✓; Fee receipts posted (8,103, no gaps) ✓; Salary journal and TDS liability ✓; Vendor bills for September (2 bills late, ₹1,18,000, button "Accrue both bills"); Depreciation journal (JV-0219 waiting; button "Review in Approvals"); Tally sync (3 failed; "Fix and resync"); Trial balance reviewed (debits = credits ₹59,22,01,620; "Mark as reviewed"). A progress bar fills. When every step is done the button "lock September" is enabled with the note "Locking stops anyone from changing September entries. Reports for September become final."
- Interactions (verified on phone): "Send to CA" on a ready filing toasts "TDS return 24Q · Q2 sent to your CA with the working files", the count falls to "2 filings need you", and the row later reads "Sent to Mr. Rakesh Bansal, CA · you'll see the acknowledgement here". "Send the emails" (needs data) toasts "Emails sent to both vendors · PANs added when they reply" and the filing becomes ready to send. Month-end buttons mark the step done with a result line ("2 bills accrued · ₹1,18,000", "All vouchers in Tally", "Reviewed by you · just now"); "Review in Approvals" jumps to the depreciation card. Lock: toast "September locked · changes now need the principal's approval" and the page says "September is closed and locked".
- Rules: dates are sample; the CA confirms every filing; once locked, changes need the principal.

Alerts (Phone only: "Alerts" tab with count)

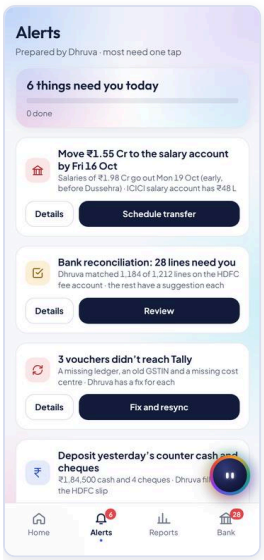

Phone · Alerts

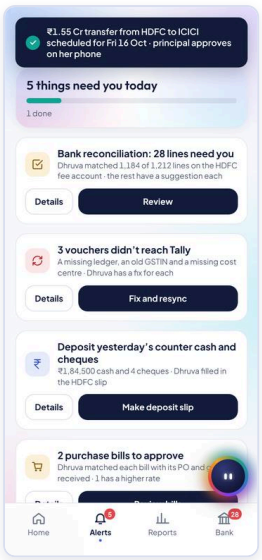

Phone · Alerts after transfer

- What it shows: "Prepared by Dhruva · most need one tap · 6 things need you today · 0 done"; the same six cards as Today, each with "Details" and its action button. Verified: "Schedule transfer" moves the card to a done row ("Salary account funded · Transfer scheduled for Fri 16 Oct · contra voucher sent to Tally ✓"), header becomes "5 things need you today · 1 done", and the tab badge falls to 5. "Review" and "Review bills" jump to the Bank tab and Bills screen.

Me (Desktop: "Me" with unread count · Phone: avatar "SG" top right, screen "Me")

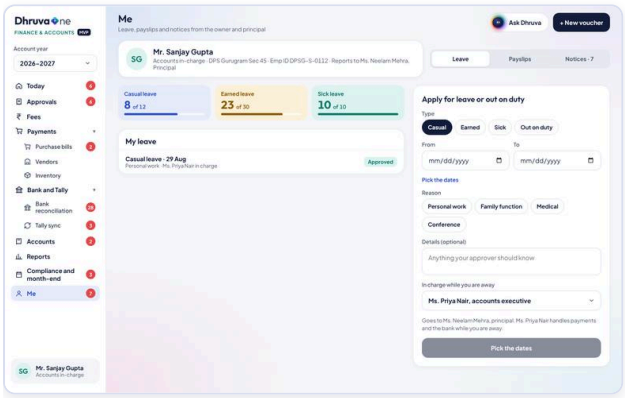

Desktop · Me

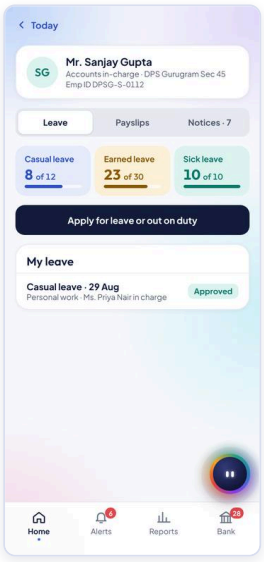

Phone · Me

- What it shows: profile (Mr. Sanjay Gupta, Accounts in-charge · DPS Gurugram Sec 45 · Emp ID DPSG-S-0112 · reports to Ms. Neelam Mehra). Tabs "Leave", "Payslips", "Notices · 7". Leave balances: Casual 8 of 12, Earned 23 of 30, Sick 10 of 10. "My leave" history (Casual leave 29 Aug, Approved). "Apply for leave or out on duty": Type (Casual/Earned/Sick/Out on duty), From, To, Reason chips (Personal work, Family function, Medical, Conference), optional details, "In charge while you are away" (Ms. Priya Nair accounts executive, Mr. Mohit Kalra fee counter). Route note: "Goes to Ms. Neelam Mehra, principal. Ms. Priya Nair handles payments and the bank while you are away." For more than 3 days: "Goes to Ms. Neelam Mehra, then the group finance head, because it is more than 3 days." After sending, toast "Sent to Ms. Neelam Mehra, principal · Ms. Priya Nair will be in charge" and later "Your leave is approved by Ms. Neelam Mehra" (about 4.5 seconds).
- Payslips: September/August/July 2026, "Credited 1 Oct · net ₹42,600" (phone verified); detail sheet shows earnings (Basic ₹30,000, DA ₹5,400, HRA ₹9,000, Transport ₹3,200), deductions (PF ₹3,600, Professional tax ₹200, TDS ₹1,200), net, year-to-date tax and PF, with "Download PDF" and "Email to me" (toasts "payslip downloaded (PDF)" / "Payslip emailed to accounts@dpsggn.in"). Footer: "Payslips come from the payroll HR runs in DhruvaOne, approved by the principal."
- Notices: owner (Mr. V.K. Shunglu: "October salary before Dussehra", "Diwali greetings and break dates"), group office, group HR ("Health insurance: add family members by 23 Oct") and principal notices; unread dot, "mark all read"; some need acknowledgement ("Confirm"), toast "Confirmed · <sender> can see it".

Ask Dhruva (Desktop: "Ask Dhruva" button on every screen · Phone: floating orb)

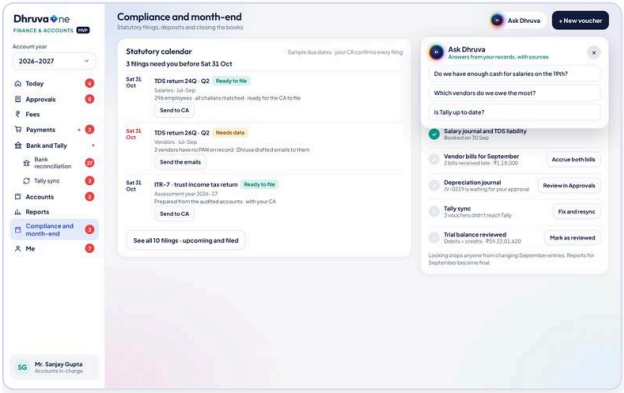

Desktop · Ask dhruva

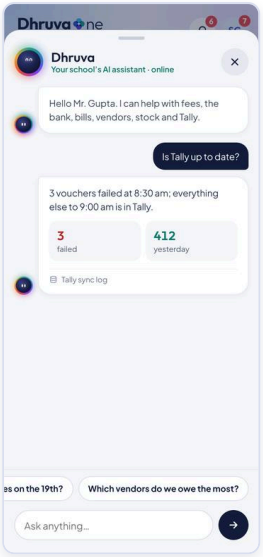

Phone · Chat answer

- What it shows: desktop panel "Answers from your records, with sources" with three questions; phone chat sheet "Dhruva · Your school's AI assistant · online · Hello Mr. Gupta. I can help with fees, the bank, bills, vendors, stock and Tally." with the same three suggested questions plus a typing box.
- Sample answers: "Do we have enough cash for salaries on the 19th?" → "Yes, after a transfer… ₹1.55 Cr needs to move from the HDFC fee account (₹2.86 Cr) by Fri 16 Oct. That still leaves ₹1.31 Cr there." (chips ₹1.55 Cr to move, ₹1.31 Cr left in HDFC; source "Bank feeds and October payroll"). "Which vendors do we owe the most?" → Indian Oil ₹2.1 L, Gurgaon Uniforms ₹1.12 L, Scientific Traders ₹78,400, Kalyani ₹62,000; last two are MSME (45 days). "Is Tally up to date?" → "Nearly: 3 vouchers failed at 8:30 am…" (3 failed, 412 sent yesterday).
- Interactions: phone shows a thinking state ("Checking your records…") for about 1.5 s, then the answer, stat chips and a source line; asked questions leave the suggestions list; unmatched questions get "In the MVP I help with fees, the bank, bills, vendors, stock and Tally. I answer from your books and show the source."

Gaps / differences between desktop and phone

- Phone has four tabs (Home, Alerts, Reports, Bank) plus pushed screens for Approvals, Fees, Bills, Compliance and Me. Desktop has the full set: Vendors, Inventory, Tally sync, Accounts (vouchers, ledgers, setup), full Reports hub and Account year selector. On phone, tapping a desktop-only section shows "That section is on the desktop".
- Phone has an Alerts tab and drill-down sheets on every chart; desktop shows the same alerts as the Today card and puts figures in tables.
- Voucher entry, ledger and master setup, month lock, Tally mapping and requisition quotes exist on desktop only. Approvals, bank matching, bill approval, filings send-to-CA and month-end steps work on both.
- Phone has no account-year selector and no switch-profile sheet on the finance board (that sheet appears on the teacher phone board).

OPERATIONS · DESKTOP · PHONE

Admissions and CRM

A simple admissions CRM where Dhruva rates every enquiry (hot, warm, cold), proposes exactly one next step per family, writes the WhatsApp, builds the campus-tour route, and keeps seats, offers and waitlists honest, from first enquiry to fee-paid admission.

Who uses it. Ms. Isha Bhardwaj, "Admissions counsellor", DPS Gurugram Sec 45 (Emp ID DPSG-S-0198, reports to Ms. Neelam Mehra, Principal). Product badge: "ADMISSIONS" with "MVP" tag.

On the following pages:

Today (Desktop: "Today" · Phone: "Today") · Enquiries and Families (Desktop: "Enquiries" · Phone: "Families") · Family record (Desktop: page "Family" under Enquiries · Phone: bottom sheet "Family") · Campus tours (Desktop: "Campus tours" · Phone: "Tours") · Seats and offers (Desktop: "Seats & offers" · Phone: "Seats") · Campaigns (Desktop only: "Campaigns") · Reports (Desktop only: "Reports") · Me (Desktop: "Me" · Phone: avatar IB)

Business summary

Admissions is a revenue function that is usually run from notebooks and WhatsApp. DhruvaOne gives the counsellor a single pipeline for the 2027–28 season (612 enquiries so far, 58 admitted against 410 seats) and a short list each morning: who to welcome, who to follow up, which tours are today, which offers expire on Sunday, which seats have freed up. Every family record carries a temperature, a stage, a next step with one button, the call history, documents, the fee, and the bus availability for their stop. Dhruva writes the welcome and follow-up messages from the last call, builds each campus tour route from what the parents said they want to see, suggests the follow-up after the tour from how interested they were, offers freed seats to the waitlist by date and sibling priority, and shows where families drop off and which sources actually convert. Fees paid in the app update admissions automatically. Counts and names are sample data.

Daily story (one thing at a time)

Friday 9 October, admissions 2027–28. Today opens with "Good morning, Ms. Bhardwaj" and "6 THINGS NEED YOU · 1 OF 6":

1. **"3 new enquiries since last evening"**: "Dhruva rated them: 2 hot, 1 warm · welcome WhatsApp and first calls ready" -> "Send welcome and book calls" (flash "Welcome sent to 3 families · calls booked for this morning"; card becomes "New enquiries welcomed · Welcome sent · first calls booked for 10 am"; the Enquiries nav badge 3 clears).
2. "9 follow-ups overdue": "Dhruva wrote a personal WhatsApp for each, from their last call" -> "Send follow-ups" ("9 follow-ups sent on WhatsApp"; "9 personal messages sent · replies come to this inbox").
3. "2 campus tours today": "Ira (KG) at 10:30 am and Advik (Class 11) at 12:00 · routes built from what they want to see" -> "Open tours".
4. "2 offers expire on Sunday": "Vanya (Class 6) and Arjun (Class 1) · admission fee not paid yet" -> "Remind families" ("Fee reminders with a pay link sent to 2 families"; "Pay link sent to both families").
5. "Nursery: 2 seats free after 2 families declined": "18 on the waitlist · Dhruva picked the next 2 by date and sibling priority" -> "Offer to next 2" ("Offers sent to the next 2 Nursery families"; "Offers valid for 7 days · the waitlist moved up").
6. "Open House, Sat 17 Oct: 126 registered": "Reminder ready in English and Hindi, with the programme and parking" -> "Send reminder" ("Reminder sent to 126 families"; "Sent to 126 families in English and Hindi"). The heading counts down ("5 THINGS NEED YOU · 1 OF 5", "See all 6 for today · 1 done", verified by clicking); "Later ›" defers.

Screens

Today (Desktop: "Today" · Phone: "Today")

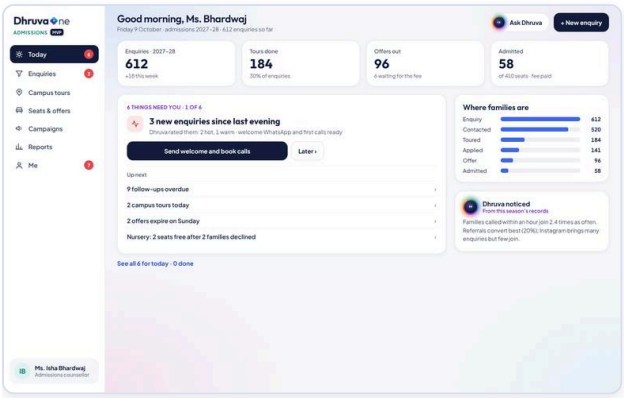

Desktop · Today

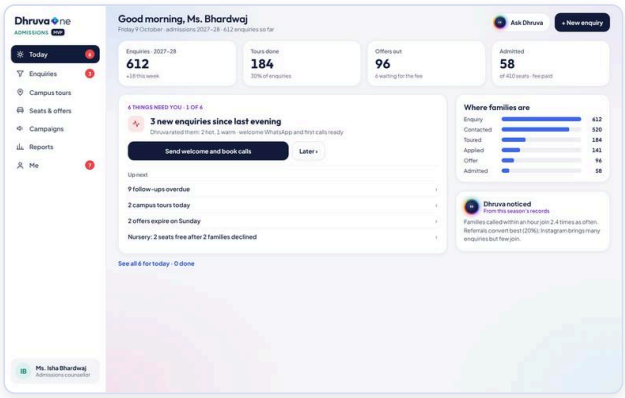

Desktop · Start

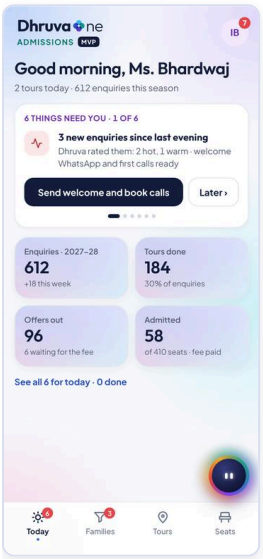

Phone · Today

- **What it shows (desktop):** four KPI tiles: "Enquiries · 2027–28 · 612 · +18 this week"; "Tours done · 184 · 30% of enquiries"; "Offers out · 96 · 6 waiting for the fee"; "Admitted · 58 · of 410 seats · fee paid". The focus card with "Up next" list (9 follow-ups overdue, 2 campus tours today, 2 offers expire on Sunday, Nursery 2 seats free,...). "Where families are": Enquiry 612, Contacted 520, Toured 184, Applied 141, Offer 96, Admitted 58. "Dhruva noticed · From this season's records": "Families called within an hour join 2.4 times as often. Referrals convert best (20%); Instagram brings many enquiries but few join." Header: "Ask Dhruva", "+ New enquiry".
- **What it shows (phone):** "2 tours today · 612 enquiries this season", the focus card (pager dots, "Later ›", "See all 6 for today · 0 done"), and the same four KPI tiles that are tappable (Enquiries -> Families, Tours done -> Tours, Offers out and Admitted -> Seats). Bottom tabs: "Today 6", "Families 3", "Tours", "Seats". Avatar IB with badge 7 opens "Me". Campaigns and Reports are not on phone (toast "Campaigns and reports are on the desktop").
- **Functions:** the six action buttons; "Later ›"; "See all"; KPI tiles (phone); "+ New enquiry" (desktop).
- **Dhruva help:** rates enquiries, writes messages, picks waitlist candidates, drafts the Open House reminder. Suggested questions: "Which families should I call first today?" (Neha Kapoor for Aarav, Nursery, and Ritu Chawla for Kabir, Class 6, both hot and new last evening; then Rahul Jain, whose offer for Vanya expires Sunday), "Which grades still have seats?" (Class 9 under 25% filled, 2 of 20; Class 3 has 10 seats left; Nursery nearly full with 18 on the waitlist), "Where do families drop off?" (between contact and tour: 520 contacted, 184 toured; Saturday tours apply 1.6 times as often). Answers show stat chips and a source ("Enquiries and offers", "Seats and offers", "Funnel, 2027–28").

Enquiries and Families (Desktop: "Enquiries" · Phone: "Families")

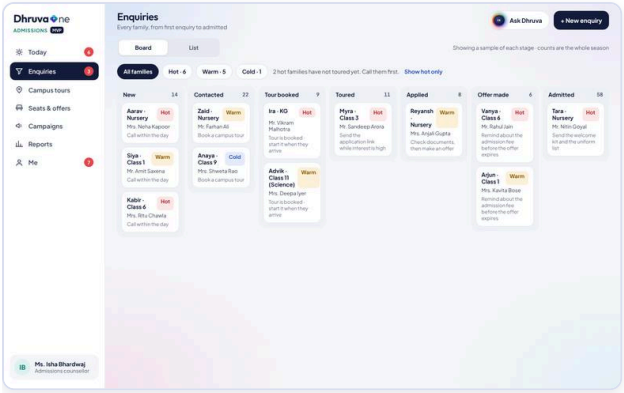

Desktop · Enquiries

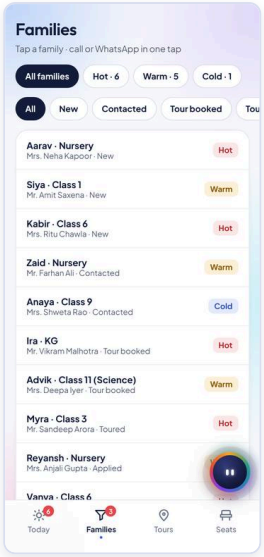

Phone · Families

- **What it shows:** "Every family, from first enquiry to admitted". Desktop has two views, "Board" (a column per stage) and "List"; phone has one list. Stages: "New", "Contacted", "Tour booked", "Toured", "Applied", "Offer made", "Admitted", with season counts (New 14, Contacted 22, Tour booked 9, Toured 11, Applied 8, Offer made 6, Admitted 58; "Showing a sample of each stage · counts are the whole season"). Each card shows child and grade, parent, temperature chip (Hot red, Warm amber, Cold blue) and Dhruva's next step text (for example "Call within the day", "Book a campus tour", "Tour is booked · start it when they arrive", "Send the application link while interest is high", "Check documents, then make an offer", "Remind about the admission fee before the offer expires", "Send the welcome kit and the uniform list").
- **Filters:** temperature pills "All families", "Hot · 6", "Warm · 5", "Cold · 1"; a banner "2 hot families have not toured yet. Call them first." with "Show hot only"; stage pills in List view and on phone ("All", "New", "Contacted", "Tour booked", "Toured", "Applied", "Offer made").
- **Sample families:** Aarav, Nursery (Mrs. Neha Kapoor, Website, hot, new); Siya, Class 1 (Mr. Amit Saxena, Google search, warm); Kabir, Class 6 (Mrs. Ritu Chawla, Referral, hot); Zaid, Nursery (Mr. Farhan Ali, Walk-in); Anaya, Class 9 (Mrs. Shweta Rao, Instagram, cold, asked about scholarships); Ira, KG (Mr. Vikram Malhotra, Open House, tour today 10:30); Advik, Class 11 Science (Mrs. Deepa Iyer, tour today 12:00, wants to meet the Physics HoD); Myra, Class 3 (Mr. Sandeep Arora, toured Wed 7 Oct); Reyansh, Nursery (Mrs. Anjali Gupta, applied, birth certificate missing); Vanya, Class 6 (Mr. Rahul Jain, offer expires Sun 11 Oct); Arjun, Class 1 (Mrs. Kavita Bose, asked to pay in two parts); Tara, Nursery (Mr. Nitin Goyal, admitted, fee ₹65,000 paid on 6 Oct).
- **New enquiry (desktop; "+ New enquiry" in the header, opens a panel on the Enquiries page):** fields "Parent", "Child" (text), "Applying for" pills (Nursery, KG, Class 1, Class 6, Class 9, Class 11), "How they heard" pills (Walk-in, Phone call, Referral, Website); buttons "Cancel" and **"Save · first call due today"** (flash "<child> added · first call due today · welcome WhatsApp sent"; the family is added as a New, Warm record: "Added at the front desk just now"). Not present on the phone board.
- **Dhruva help:** temperature, next step, and message drafting per family.

Family record (Desktop: page "Family" under Enquiries · Phone: bottom sheet "Family")

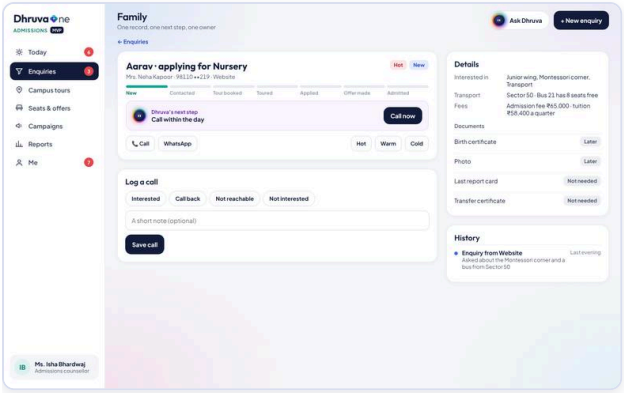

Desktop · Family

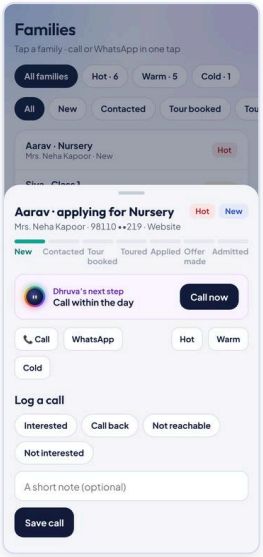

Phone · Family sheet

- **What it shows:** "← Enquiries" (desktop); child, "applying for <grade>", parent, masked phone ("98110 ••219"), source (for example "Referral · Mrs. Pooja Sharma", "Referral · staff"); temperature chip and stage chip; a 7-step stage bar (New to Admitted). "Dhruva's next step" card with one button (see below). "📞 Call" (flash "Calling Mrs. Neha Kapoor · 98110 ••219") and "WhatsApp" (flash "WhatsApp to Mrs. Neha Kapoor · Dhruva drafted it from the last call"). Temperature override pills "Hot", "Warm", "Cold". "Log a call": outcome pills "Interested", "Call back", "Not reachable", "Not interested", a note, and "Save call".
- **Next-step button by stage and result:** New -> "Call now" (flash "Call logged · moved to Contacted"); Contacted -> "Book a tour" ("Tour booked for Sat 10 Oct, 11 am · WhatsApp confirmation sent with map and parking"); Tour booked -> "Start tour" ("Tour started · tick stops on the Tours page", opens Tours); Toured -> "Send application link" ("Application link sent on WhatsApp"); Applied -> "Make an offer" ("Offer letter sent · valid for 7 days"); Offer made -> "Record fee paid" ("Admission fee recorded · <child> is admitted · accounts and the class teacher told"); Admitted -> "Send welcome kit" ("Welcome kit and uniform list sent").
- **Log a call:** requires an outcome ("Pick how the call went"); on save: "Call logged · next follow-up set", the call is added at the top of History as "Call · interested / call back / not reachable / not interested", note and "Just now"; for a New family a reachable call moves the stage to Contacted; "Not reachable" flashes "Logged · Dhruva will remind you to try again at 5 pm". Verified by clicking: Aarav moved New -> Contacted and the next step changed to "Book a campus tour".
- **Details (desktop):** "Interested in" (for example "Junior wing, Montessori corner, Transport"), "Transport" (stop and bus availability, for example "Sector 50 · Bus 21 has 8 seats free", "Sector 47 · Bus 7 is full, Bus 3 has 2 seats", "Not needed"); "Fees" ("Admission fee ₹65,000 · tuition ₹58,400 a quarter" for Nursery and KG; "₹40,480 a quarter" for Classes 1–5; "₹71,200 a quarter" for higher classes); "Documents" (Birth certificate, Photo, Last report card, Transfer certificate with Received, Later, Missing, Not needed, Before joining); "History" (first entry: "Enquiry from Website · <their question> · Last evening"). Phone sheet shows the stage bar, next step, call/WhatsApp, temperature and the call log, without the Details, Fees, Documents and History blocks.
- **Dhruva help:** drafts WhatsApp from the last call; fills transport availability from the live route lists (links to the Transport board data).

Campus tours (Desktop: "Campus tours" · Phone: "Tours")

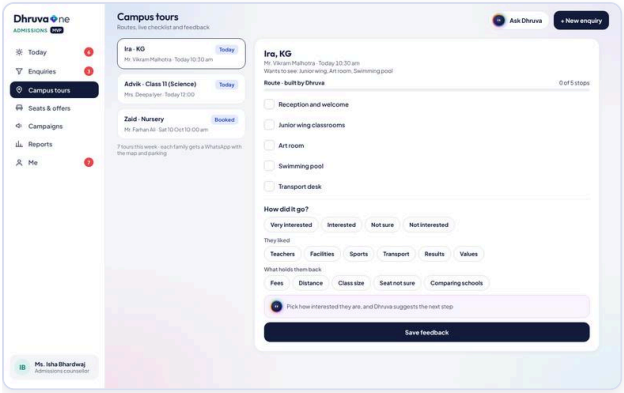

Desktop · Campus tours

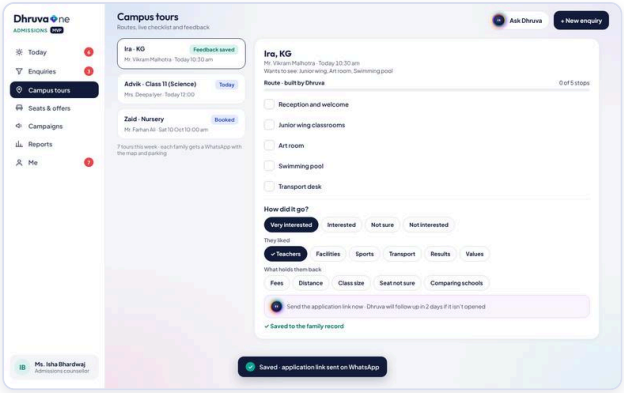

Desktop · Tour feedback saved

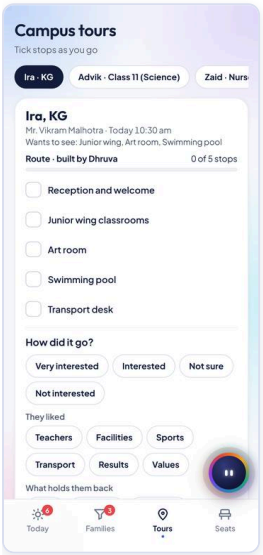

Phone · Tours

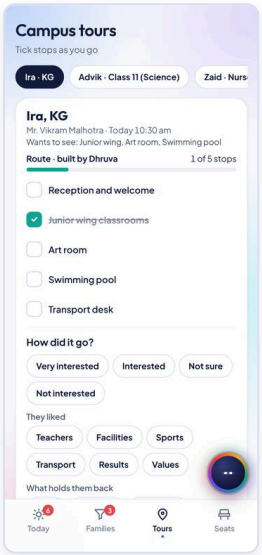

Phone · Tour checklist

- **What it shows:** "Routes, live checklist and feedback" (phone: "Tick stops as you go"). Left list: Ira, KG (Mr. Vikram Malhotra, Today 10:30 am, "Today"), Advik, Class 11 Science (Mrs. Deepa Iyer, Today 12:00), Zaid, Nursery (Mr. Farhan Ali, Sat 10 Oct 10:00 am, "Booked"). Note "7 tours this week · each family gets a WhatsApp with the map and parking".
- **Route (built by Dhruva, from what they want to see):** "Wants to see: Junior wing, Art room, Swimming pool"; stops: Reception and welcome, Junior wing classrooms, Art room, Swimming pool, Transport desk (for Advik: Reception and welcome, Physics and Chemistry labs, Meet Mr. Rahul Khanna PGT Physics, Library and JEE corner, Fee counter; for Zaid: Reception, Junior wing, Play area, Canteen). Tap a stop to tick it (strikes through, progress "1 of 5 stops" with a bar).
- **Feedback "How did it go?":** pills "Very interested", "Interested", "Not sure", "Not interested"; "They liked" (Teachers, Facilities, Sports, Transport, Results, Values; multi-select with a tick); "What holds them back" (Fees, Distance, Class size, Seat not sure, Comparing schools). Dhruva's suggestion changes with the interest: Very interested "Send the application link now · Dhruva will follow up in 2 days if it isn't opened"; Interested "Send the application link and a fee break-up · follow up on Monday"; Not sure "Share a short video of the classes they missed · call back on Wednesday"; Not interested "Close kindly and keep for next year"; default "Pick how interested they are, and Dhruva suggests the next step".
- **Save feedback:** needs an interest choice ("Pick how interested they are"). Very interested or Interested: flash "Saved · application link sent on WhatsApp", family moves to Applied; otherwise "Saved · follow-up set" and stays Toured. The tour chip becomes "Feedback saved", and "✓ Saved to the family record" appears.
- **Rules:** the route is generated from the interests recorded on the family record; saving feedback changes the stage.

Seats and offers (Desktop: "Seats & offers" · Phone: "Seats")

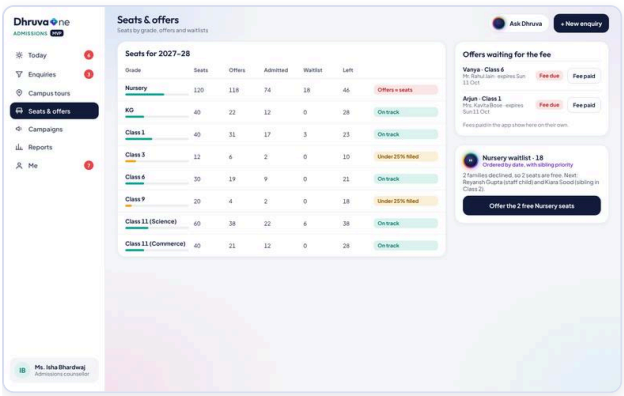

Desktop · Seats offers

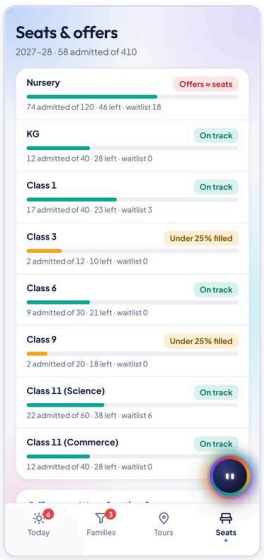

Phone · Seats

- **What it shows:** "Seats by grade, offers and waitlists". Table "Seats for 2027–28": Grade, Seats, Offers, Admitted, Waitlist, Left, status chip. Nursery 120/118/74/18/46 "Offers ≈ seats" (red); KG 40/22/12/0/28; Class 1 40/31/17/3/23; Class 3 12/6/2/0/10 "Under 25% filled" (amber); Class 6 30/19/9/0/21; Class 9 20/4/2/0/18 "Under 25% filled"; Class 11 Science 60/38/22/6/38; Class 11 Commerce 40/21/12/0/28 (others "On track", green). Each row has a fill bar (amber when under 25%). Phone shows the same as cards ("74 admitted of 120 · 46 left · waitlist 18"), header "2027–28 · 58 admitted of 410".
- **Offers waiting for the fee:** Vanya, Class 6 (Mr. Rahul Jain) and Arjun, Class 1 (Mrs. Kavita Bose), "expires Sun 11 Oct", chip "Fee due" (becomes "Reminded" after the Today reminder, "Fee paid" when paid). Desktop button **"Fee paid"** per offer (flash "Vanya admitted · fee recorded · accounts told", Class 6 admitted count rises). Note: "Fees paid in the app show here on their own." Phone shows the offers with their chip only (no button).
- **Nursery waitlist · 18 (desktop):** "Ordered by date, with sibling priority. 2 families declined, so 2 seats are free. Next: Reyansh Gupta (staff child) and Kiara Sood (sibling in Class 2)." Button "Offer the 2 free Nursery seats" (flash "Offers sent to the next 2 Nursery families"; "✓ Offers sent to the next 2"). The Today card does the same on phone.
- **Rules:** waitlist ordered by date with sibling and staff-child priority; offers valid 7 days; status tags driven by fill percentage.

Campaigns (Desktop only: "Campaigns")

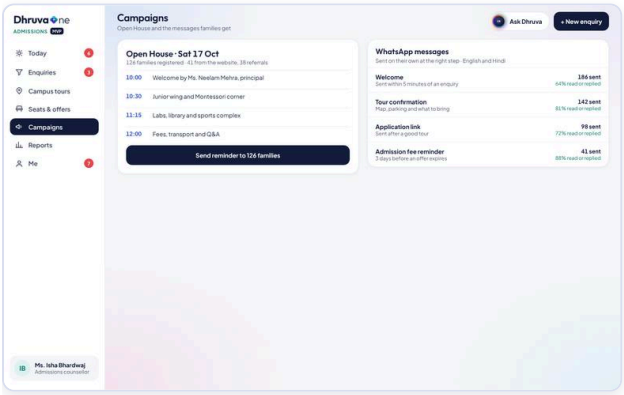

Desktop · Campaigns

- **What it shows:** "Open House and the messages families get". "Open House · Sat 17 Oct": "126 families registered · 41 from the website, 38 referrals"; programme: 10:00 Welcome by Ms. Neelam Mehra, principal; 10:30 Junior wing and Montessori corner; 11:15 Labs, library and sports complex; 12:00 Fees, transport and Q&A. Button "Send reminder to 126 families" (flash "Reminder sent to 126 families"; "✓ Reminder sent to 126 families").
- **WhatsApp messages** ("Sent on their own at the right step · English and Hindi"): "Welcome · Sent within 5 minutes of an enquiry · 186 sent · 64% read or replied"; "Tour confirmation · Map, parking and what to bring · 142 sent · 81% read or replied"; "Application link · Sent after a good tour · 98 sent · 72% read or replied"; "Admission fee reminder · 3 days before an offer expires · 41 sent · 88% read or replied".

Reports (Desktop only: "Reports")

Desktop · Reports

- **What it shows:** "Where families drop off, and which sources work". "Funnel · 2027–28 so far": Enquiry 612, Contacted 520 (85% of previous), Toured 184 (35%), Applied 141 (77%), Offer 96 (68%), Admitted 58 (60%), with bars. Insight: "The biggest drop is between contact and tour (35%). Saturday tour slots fill first." "Which sources bring families who join": Source / Enquiries / Admitted / Conversion: Referral 74 / 15 / 20.3%; Website 210 / 18 / 8.6%; Walk-in 96 / 11 / 11.5%; Open House 64 / 6 / 9.4%; Google search 128 / 7 / 5.5%; Instagram 40 / 1 / 2.5% (bars green at 10% or more).

Me (Desktop: "Me" · Phone: avatar IB)

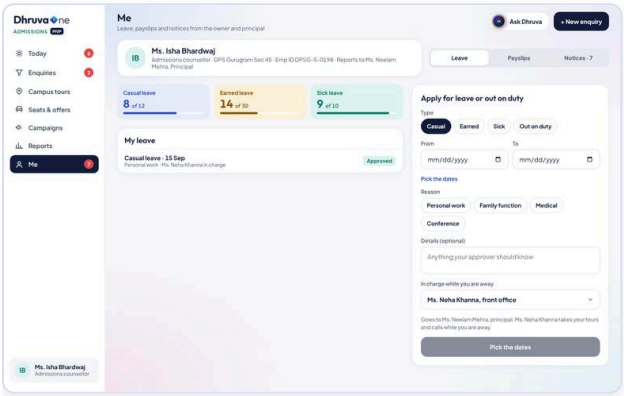

Desktop · Me

- Same staff-self page as other roles: Casual 8 of 12, Earned 14 of 30, Sick 9 of 10; apply for leave or out on duty (Type, From/To, Reason pills, Details, "In charge while you are away": Ms. Neha Khanna, front office, or Mr. Rohan Vij, admissions assistant); routing "Goes to Ms. Neelam Mehra, principal. Ms. Neha Khanna takes your tours and calls while you are away" (over 3 days also to the group HR head); payslips; "Notices · 7" from owner and principal.

Gaps and differences between desktop and phone

- Phone tabs: Today, Families, Tours, Seats. **Desktop only:** Enquiries Board view with column counts, "+ New enquiry" panel, Campaigns, Reports, the "Where families are" funnel and "Dhruva noticed" card on Today, the fuller family record (Details, Fees, Documents, History), "Fee paid" button on offers, the Nursery waitlist block with "Offer the 2 free Nursery seats" (on phone this is done from the Today card).
- Phone: KPI tiles act as shortcuts into tabs; Family opens as a bottom sheet with call, WhatsApp, temperature, next step and call log.
- Tours and the next-step flow work identically on both.

OPERATIONS · DESKTOP · PHONE

Security and IT

One desk for everything that can go wrong on campus, from an unknown man at a gate to a dead strongroom camera: every problem becomes a job, Dhruva suggests who should take it, and the in-charge assigns it in one tap.

Who uses it. Mr. Rakesh Thakur, "Security & IT in-charge", DPS Gurugram Sec 45 (Emp ID DPSG-S-0177, reports to Ms. Neelam Mehra, Principal). Product badge: "SECURITY & IT" with "MVP" tag.

On the following pages:

Today (Desktop: "Today" · Phone: "Today") · Jobs (Desktop: "Jobs" · Phone: "Jobs") · Gate (Desktop: "Gate" · Phone: "Gate") · Systems (Desktop: "Systems" tab · Phone: no tab, reached from the Today row "Systems: 4 of 6 working") · Team (Desktop: "Team" · Phone: "Team") · Me (Desktop: "Me" · Phone: avatar RT at top of Today)

Business summary

Schools handle security and IT through phone calls, WhatsApp forwards and memory. In DhruvaOne anyone can report a problem from their app; the Security and IT in-charge sees a single list of "jobs" from report to resolved, with priority and a suggested owner. Dhruva groups repeat reports (nine teachers reporting the same Wi-Fi fault become one job) and suggests the best available person ("free now, 1 minute away", "fixed this switch in August"). The same desk covers the gate (visitor approvals and check-out, early pickups checked against the authorised list), the health of systems (internet, Wi-Fi, CCTV, smart boards, printers, backup), and the team (guards at posts, technicians' workload and a fair night roster for the Diwali break). The result is faster response, a record of who did what, and no child leaving with an unlisted adult. Exam readiness (for example the strongroom camera before Term 1 papers) is checked proactively.

Daily story (one thing at a time)

Friday 9 Oct, 9:12 am. Today opens with "Good morning, Mr. Thakur" and the first of "6 THINGS NEED YOU · 1 OF 6":

1. **"Unknown man near Gate 2 for 40 minutes"**: "Reported by Mrs. Usha Tiwari · Mr. Harish Chand is free and 1 minute away". Buttons "Send Harish" and "Later ›". Tapping "Send Harish" flashes "Mr. Harish Chand assigned · told on his phone"; about 3 seconds later a second toast reports back from the guard: "Harish: he is a cab driver for a parent · sent to reception", and the card turns into "Gate 2: Harish is on it · Updates come to you as he reports back".
2. "Early pickup: uncle not on the list": "Kiara Kapoor, 3–B · Mr. Vinod Kapoor is waiting at Gate 1" -> button "Call her mother" -> "Mrs. Neha Kapoor confirmed · pickup allowed and logged".
3. "Strongroom camera offline": "Term 1 papers are sealed there and exams start Monday · Mr. Sunil Kumar is on campus" -> "Assign Sunil".
4. "Wi-Fi down on Senior block 2nd floor": "9 teachers reported it; Dhruva made it one job · Mr. Ajay Pal is free" -> "Assign Ajay".
5. "3 visitors waiting over 10 minutes": "Their hosts haven't approved yet" -> "Nudge hosts" -> "Hosts nudged", then after a moment "All 3 visitors approved · badges printed".
6. "Diwali break: 3 nights without a guard": "22, 24 and 25 Oct · Dhruva can fill them fairly" -> "Fill with Dhruva" -> "3 nights filled · guards told on WhatsApp". After each action the next card comes forward; the heading counts down ("4 THINGS NEED YOU · 1 OF 4", "See all 6 for today · 2 done", verified by clicking). Done cards change wording to a status ("Gate 2: Harish is on it", "Strongroom camera: Sunil assigned · The exam cell has been told", "Wi-Fi: Ajay assigned · Teachers told it is being fixed", "Early pickup confirmed · Mother confirmed on a call · pickup logged with photo", "Visitors approved · Badges printed at the gate", "Diwali break nights covered · Guards told · no one does more than 2 nights").

Screens

Today (Desktop: "Today" · Phone: "Today")

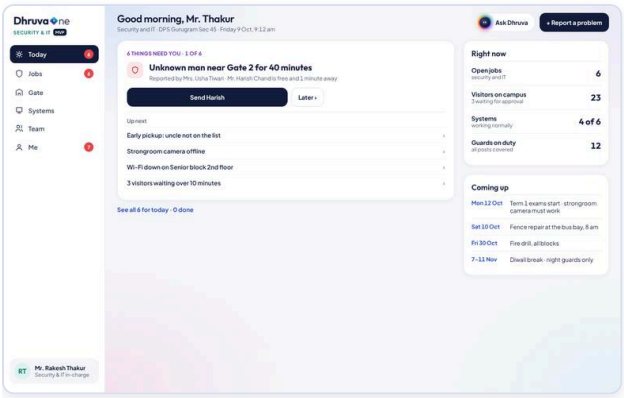

Desktop · Today

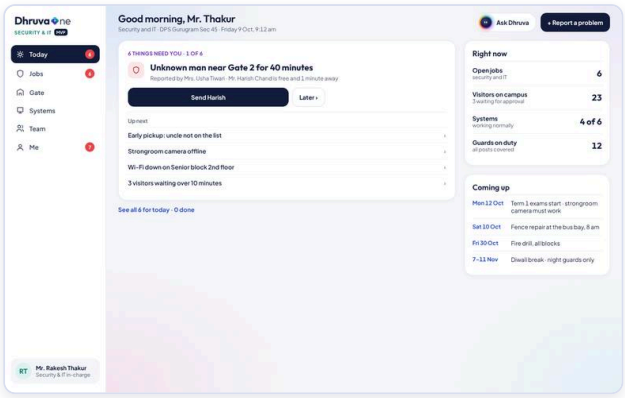

Desktop · Start

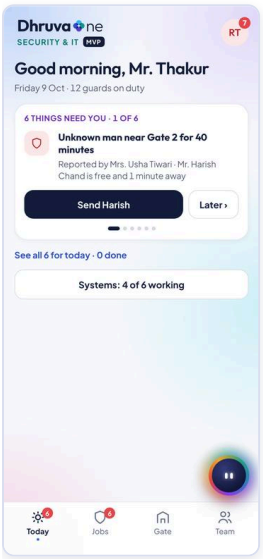

Phone · Today

- **What it shows (desktop):** the focus card; an "Up next" list of the next four items (each row jumps to that item); "Right now" tiles: "Open jobs 6 · security and IT", "Visitors on campus 23 · 3 waiting for approval", "Systems 4 of 6 · working normally" (becomes "6 of 6" once the camera and Wi-Fi jobs are resolved), "Guards on duty 12 · all posts covered"; "Coming up": Mon 12 Oct "Term 1 exams start · strongroom camera must work"; Sat 10 Oct "Fence repair at the bus bay, 8 am"; Fri 30 Oct "Fire drill, all blocks"; 7–11 Nov "Diwali break · night guards only". Header: "Ask Dhruva" and "+ Report a problem" (opens Jobs). Left navigation with red badges: Today 6, Jobs 6, Me 7.
- **What it shows (phone):** greeting "Friday 9 Oct · 12 guards on duty", the focus card with pager dots, "See all 6 for today · 0 done", and a row button "Systems: 4 of 6 working" that opens the Systems screen (phone has no Systems tab). Bottom tabs: "Today 6", "Jobs 6", "Gate", "Team". RT avatar with badge 7 at top right opens "Me". Dhruva orb floating.
- **Functions:** the six action buttons above; "Later ›"; "See all... done" (expands or hides the full list); "Up next" rows (desktop) jump to a card; header "+ Report a problem"; "Ask Dhruva".
- **Dhruva help:** pre-ranks the six items, suggests the person for each one, and merges duplicate reports. Questions offered in the assistant: "What is still open today?" (six jobs, one urgent, two high), "Is everything ready for Monday's exams?" (camera offline, 42 wall clocks unchecked; PA and exam cell printer ready), "How many visitors came this week?" (312 this week, 41 today, average approval wait 4 minutes). Each answer has stat chips and a source ("Jobs log", "Systems and the exam cell checklist", "Gate register").
- **Rules and edge cases:** completed items stay counted in the "done" total; an assignment moves the linked job from New to Assigned.

Jobs (Desktop: "Jobs" · Phone: "Jobs")

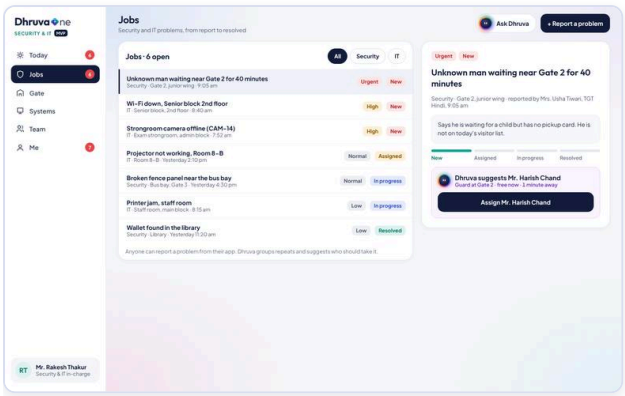

Desktop · Jobs

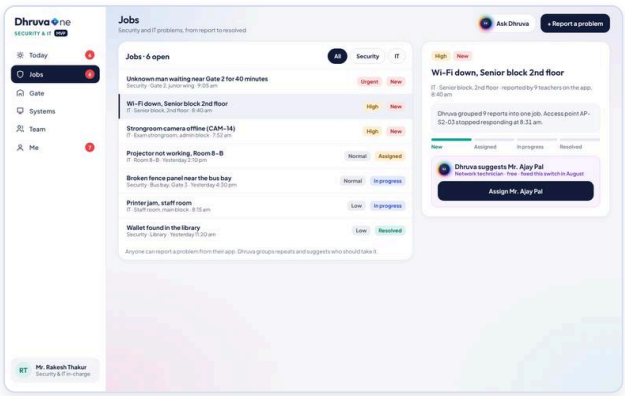

Desktop · Job detail

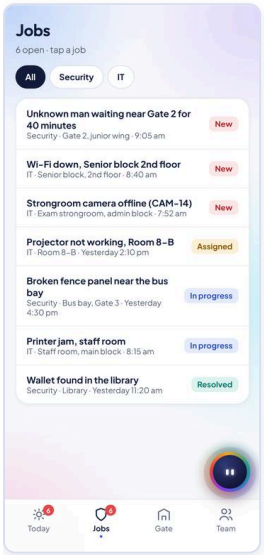

Phone · Jobs

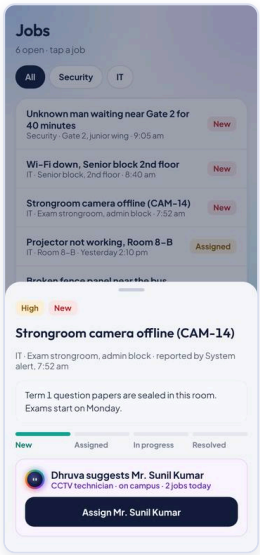

Phone · Job sheet

- **What it shows:** "Security and IT problems, from report to resolved". "Jobs · 6 open" (phone: "6 open · tap a job"), filter pills "All", "Security", "IT". Each row shows title, type, location, report time, a status chip and (desktop) a priority chip. Sample: Unknown man waiting near Gate 2 for 40 minutes (Security, Gate 2 junior wing, 9:05 am, Urgent, New); Wi-Fi down, Senior block 2nd floor (IT, 8:40 am, High, New); Strongroom camera offline CAM-14 (IT, exam strongroom admin block, 7:52 am, High, New); Projector not working Room 8–B (IT, yesterday 2:10 pm, Normal, Assigned to Mr. Sunil Kumar); Broken fence panel near the bus bay (Security, Bus bay Gate 3, yesterday 4:30 pm, Normal, In progress, a guard is posted there until the contractor fixes it Saturday morning); Printer jam, staff room (IT, Low, In progress, teachers use the library printer meanwhile); Wallet found in the library (Security, Low, Resolved, returned to Mr. Arjun Menon at 1:05 pm). Sorted New, Assigned, In progress, Resolved. Footnote "Anyone can report a problem from their app. Dhruva groups repeats and suggests who should take it."
- **Job detail (desktop right panel, phone bottom sheet "Job"):** title, priority and status chips, type, location, "reported by" (for example "Mrs. Usha Tiwari, TGT Hindi", "9 teachers on the app", "System alert"), time, a description (for instance "Says he is waiting for a child but has no pickup card. He is not on today's visitor list.", "Dhruva grouped 9 reports into one job. Access point AP-S2–03 stopped responding at 8:31 am.", "Term 1 question papers are sealed in this room. Exams start on Monday."), a four-step progress bar "New / Assigned / In progress / Resolved", and a "Dhruva suggests" box naming a person with the reason (Mr. Harish Chand "Guard at Gate 2 · free now · 1 minute away"; Mr. Ajay Pal "Network technician · free · fixed this switch in August"; Mr. Sunil Kumar "CCTV technician · on campus · 2 jobs today").
- **Functions:** "Assign <name>" (flash "<name> assigned · told on his phone"); once assigned the panel shows "With <name>" and two buttons, "Mark in progress" and "Mark resolved" (resolved flashes "Resolved · <reporter> told" and adds an entry to Recently fixed on the Systems screen); row tap opens the detail; filter pills; "+ Report a problem" (opens this screen, the form itself is not shown, the reporting is done from other users' apps).
- **Interactions:** assign -> in progress -> resolved, each moves the status chip and progress bar. The Gate 2 job triggers a simulated report-back from the guard 3 seconds after assignment.
- **Dhruva help:** groups duplicate reports, ranks priority, proposes assignee with reason and availability.
- **Rules and edge cases:** Today badge and Jobs badge reflect open count (6). Security and IT jobs share one list; the filter splits them.

Gate (Desktop: "Gate" · Phone: "Gate")

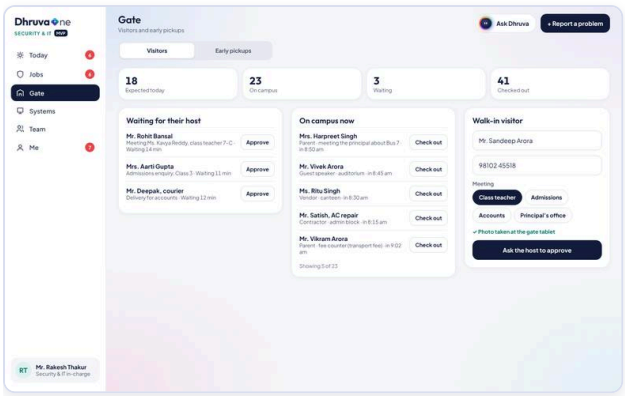

Desktop · Gate

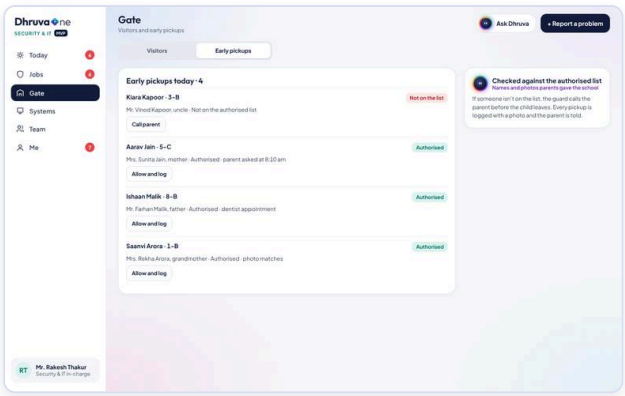

Desktop · Early pickups

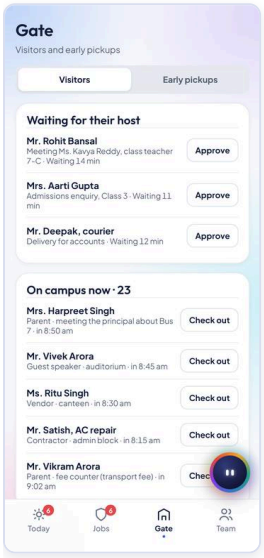

Phone · Gate

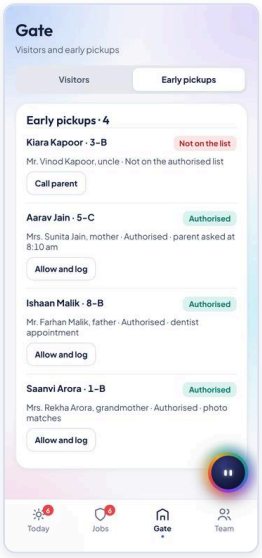

Phone · Pickups

- **What it shows:** "Visitors and early pickups" with two tabs, "Visitors" and "Early pickups".
- **Visitors tab:** counters "18 Expected today", "23 On campus", "3 Waiting", "41 Checked out" (phone shows "On campus now · 23"). "Waiting for their host": Mr. Rohit Bansal (meeting Ms. Kavya Reddy, class teacher 7–C, waiting 14 min), Mrs. Aarti Gupta (admissions enquiry, Class 3, 11 min), Mr. Deepak, courier (delivery for accounts, 12 min), each with "Approve" (flash "<name> approved · badge printed"). "On campus now" (showing 5 of 23): Mrs. Harpreet Singh (parent meeting the principal about Bus 7, in 8:50 am), Mr. Vivek Arora (guest speaker, auditorium), Ms. Ritu Singh (vendor, canteen), Mr. Satish AC repair (contractor, admin block), Mr. Vikram Arora (parent at fee counter, 9:02 am), each with "Check out" (flash "<name> checked out", on-campus count drops by one, checked-out count rises).
- **Walk-in visitor (desktop panel):** Meeting pills "Class teacher", "Admissions", "Accounts", "Principal's office"; "✓ Photo taken at the gate tablet"; button "Ask the host to approve" -> "Host asked to approve · usually under 5 minutes", then "✓ Sent to the host for approval". (Phone Visitors tab shows the lists; the walk-in form is shown on desktop.)
- **Early pickups tab:** "Early pickups today · 4". Each row: child and class, collecting person and relationship, authorised or not. Kiara Kapoor 3–B, Mr. Vinod Kapoor (uncle), "Not on the list" -> "Call parent" (-> "Parent confirmed · pickup allowed and logged with photo", row shows "✓ Parent confirmed on call · logged"); Aarav Jain 5–C, mother, "Authorised · parent asked at 8:10 am"; Ishaan Malik 8–B, father, "Authorised · dentist appointment"; Saanvi Arora 1–B, grandmother, "Authorised · photo matches": "Allow and log" (-> "<child> signed out · parent told", row "✓ Allowed and logged"). Note on desktop: "Checked against the authorised list: names and photos parents gave the school. If someone isn't on the list, the guard calls the parent before the child leaves. Every pickup is logged with a photo and the parent is told."
- **Dhruva help:** matches names and photos with the authorised list; pre-flags the unlisted uncle; supplies the "Nudge hosts" automation.
- **Rules and edge cases:** pickup of an unlisted adult always requires a parent call; every pickup logged with photo and parent notified.

Systems (Desktop: "Systems" tab · Phone: no tab, reached from the Today row "Systems: 4 of 6 working")

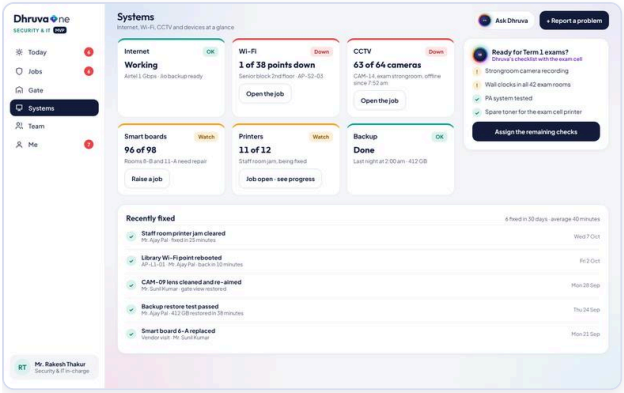

Desktop · Systems

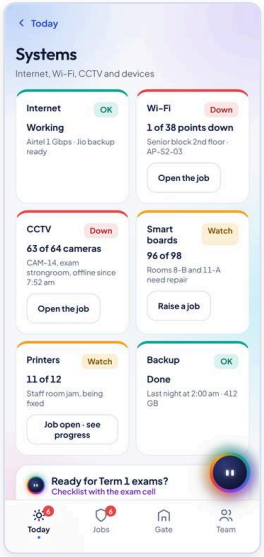

Phone · Systems

- **What it shows:** "Internet, Wi-Fi, CCTV and devices at a glance": six tiles with status chip OK/Watch/Down and a coloured top border: "Internet OK · Working · Airtel 1 Gbps · Jio backup ready"; "Wi-Fi Down · 1 of 38 points down · Senior block 2nd floor · AP-S2-03"; "CCTV Down · 63 of 64 cameras · CAM-14, exam strongroom, offline since 7:52 am"; "Smart boards Watch · 96 of 98 · Rooms 8-B and 11-A need repair"; "Printers Watch · 11 of 12 · Staff room jam, being fixed"; "Backup OK · Done · Last night at 2:00 am · 412 GB". Then "Ready for Term 1 exams?" checklist ("Dhruva's checklist with the exam cell"): Strongroom camera recording (!), Wall clocks in all 42 exam rooms (!), PA system tested (check), Spare toner for the exam cell printer (check); and "Recently fixed · 6 fixed in 30 days · average 40 minutes" with five entries (Staff room printer jam, Library Wi-Fi AP-L1-01, CAM-09 lens, Backup restore test 412 GB in 38 minutes, Smart board 6-A replaced).
- **Functions:** tile action buttons: Wi-Fi and CCTV "Open the job" (jumps to Jobs with that job selected; reads "Job open · see progress" once assigned); Printers "Job open · see progress"; Smart boards "Raise a job" -> "Job raised for the 2 smart boards · Mr. Sunil Kumar assigned, Rooms 8-B and 11-A", the button becomes "✓ Job raised · Mr. Sunil Kumar" and a "Smart boards job raised" entry appears in Recently fixed with a "..." marker; "Assign the remaining checks" (desktop) -> "Wall clock check assigned · due Saturday", button "✓ Checks assigned to Ajay and Sunil".
- **Live linkage:** resolving the Wi-Fi or CCTV job turns the tiles to "Working / All access points up" or "64 of 64 cameras / All recording", the Today tile to "6 of 6", the exam checklist item to done, and adds "Senior block Wi-Fi restored" or "Strongroom camera back online" to Recently fixed.
- **Rules:** the status colour comes from linked jobs, so IT status is not manually edited.

Team (Desktop: "Team" · Phone: "Team")

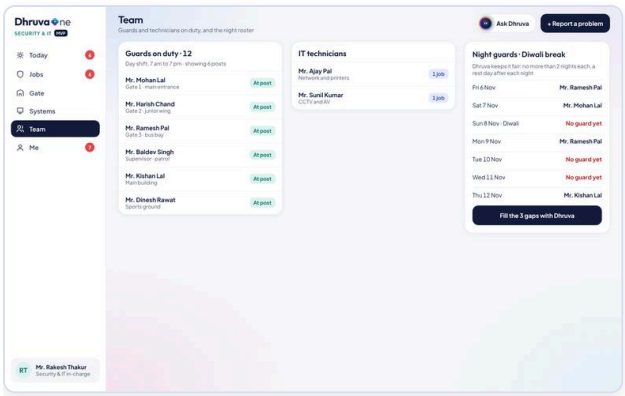

Desktop · Team

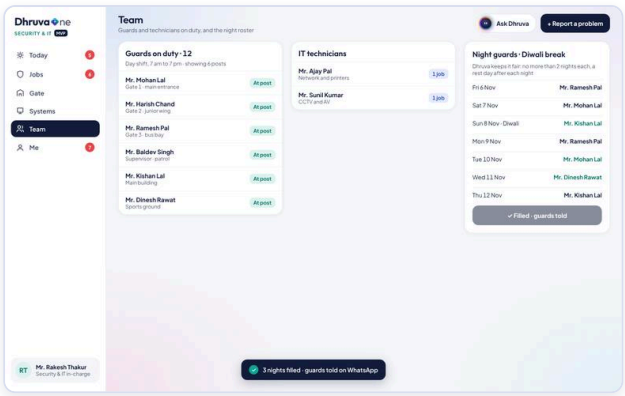

Desktop · Team filled

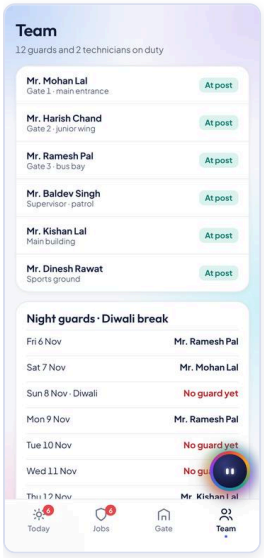

Phone · Team

- **What it shows:** "Guards and technicians on duty, and the night roster". "Guards on duty · 12 · Day shift, 7 am to 7 pm · showing 6 posts" (phone heading "12 guards and 2 technicians on duty"): Mr. Mohan Lal Gate 1 main entrance; Mr. Harish Chand Gate 2 junior wing; Mr. Ramesh Pal Gate 3 bus bay; Mr. Baldev Singh supervisor patrol; Mr. Kishan Lal main building; Mr. Dinesh Rawat sports ground, each "At post" (Harish shows "On a job" while on the Gate 2 job). "IT technicians": Mr. Ajay Pal (network and printers), Mr. Sunil Kumar (CCTV and AV), each with a live job count ("1 job"). "Night guards · Diwali break": "Dhruva keeps it fair: no more than 2 nights each, a rest day after each night". Roster Fri 6 Nov to Thu 12 Nov with gaps shown red as "No guard yet" (Sun 8 Nov Diwali, Tue 10 Nov, Wed 11 Nov).
- **Functions:** "Fill the 3 gaps with Dhruva" -> "3 nights filled · guards told on WhatsApp", gaps become Mr. Kishan Lal (8 Nov), Mr. Mohan Lal (10 Nov), Mr. Dinesh Rawat (11 Nov) in green, button "✓ Filled · guards told".

Me (Desktop: "Me" · Phone: avatar RT at top of Today)

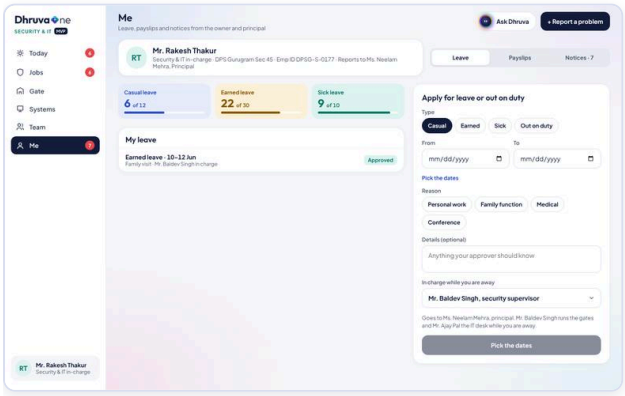

Desktop · Me

- **What it shows and does:** same staff-self page as other roles: leave balances Casual 6 of 12, Earned 22 of 30, Sick 9 of 10; "My leave" (Earned leave 10–12 Jun, "Family visit · Mr. Baldev Singh in charge", Approved); tabs Leave, Payslips, Notices · 7. Apply for leave or out on duty: Type (Casual, Earned, Sick, Out on duty), From/To dates, Reason (Personal work, Family function, Medical,

Conference), "Details (optional)", "In charge while you are away" (Mr. Baldev Singh, security supervisor / Mr. Ajay Pal, IT technician). Routing text: "Goes to Ms. Neelam Mehra, principal. Mr. Baldev Singh runs the gates and Mr. Ajay Pal the IT desk while you are away"; leave over 3 days goes to the principal and then the group HR head. Payslip: bank PNB ••3054; Basic ₹36,000, DA ₹6,480, HRA ₹10,800, Transport ₹3,200, Night duty allowance ₹2,500; deductions PF ₹4,320, Professional tax ₹200, TDS ₹1,500; "Email to me" (to itdesk@dpsggn.in) and "Download PDF". Notices from owner and principal with unread dots and "Confirm" where acknowledgement is needed ("Confirmed · <name> can see it").

Gaps and differences between desktop and phone

- Phone has four tabs (Today, Jobs, Gate, Team); Systems is a screen opened from Today ("Systems: 4 of 6 working"), Me from the avatar.
- Desktop adds: "Up next" list, "Right now" tiles, "Coming up", the walk-in visitor panel, "Assign the remaining checks" on the exam checklist, a priority chip on each job row, side-by-side list and detail on Jobs.
- Phone shows job details in a bottom sheet "Job"; during the render test the sheet stayed open when switching tab, so it needs the Close scrim to dismiss.
- Systems, Team, Gate and job flows work identically on both.

OPERATIONS · DESKTOP · PHONE

Transport and Bus Attendant

The attendant taps children and stops on the bus, and that tapping drives everything the in-charge sees, from where every bus is (no GPS needed) to the message each parent receives; the in-charge handles breakdowns, late buses, safety checks, route changes, fleet papers, transport fees and reports with Dhruva's drafts.

Who uses it. (1) Mr. Vinod Bhatt, "Transport in-charge", DPS Gurugram Sec 45 (Emp ID DPSG-S-0133, reports to Ms. Neelam Mehra, Principal), desktop and phone. (2) Mrs. Geeta Devi, "Bus attendant, Bus 7" (Emp ID DPSG-S-0261, reports to Mr. Vinod Bhatt), phone only, English and Hindi. Product badges: "TRANSPORT" and "BUS ATTENDANT", each with "MVP".

On the following pages:

Today (Desktop: "Today" · Phone: "Today") · Live board (Desktop: "Live board" · Phone: "Live") · Safety checks (Desktop: "Safety checks" · Phone: "Safety") · Parent messages (Desktop: "Parent messages" · Phone: "Messages") · Routes and students (Desktop only: "Routes & students") · Fleet (Desktop only: "Fleet") · Transport fees (Desktop only: "Transport fees") · Reports (Desktop only: "Reports") · Me (Desktop: "Me" · Phone: avatar VB top right) · Trip, morning pickup (Phone: "Trip" with "Morning") · Trip, afternoon drop (Phone: "Trip" with "Afternoon") · Children (Phone: "Children") · SOS and help (Phone: "SOS") · Me (Phone: "Me")

Business summary

Transport is the part of school life with the highest parent anxiety and the most phone calls. In DhruvaOne the attendant on each bus has a one-handed, large-button phone screen (English or Hindi) where one tap per child tells the parent "On Bus 7 at 7:21" and one tap at each stop updates the live board. The Transport in-charge sees all 24 buses and 1,046 children at once, with an emergency banner when a bus breaks down, and acts in one tap: send the spare bus and tell all 38 families in English and Hindi, call an attendant who has not started, tell the families of a late bus their new stop time. Safety is built in: headcount (bus taps against class attendance), speed and route alerts from GPS, cover for absent drivers and attendants, and a strict afternoon handover where a child is released only to someone on the parent-approved list or with a parent code, otherwise the child stays on the bus and the in-charge and the parent are told. Back-office jobs (route changes with seat and fee impact, fleet documents, fee reconciliation against the fee ledger, monthly reports for the principal) are in the same place. All data is sample.

Daily story (one thing at a time)

In-charge, Friday 9 Oct, morning pickup (24 buses, 1,046 children).

- A red **"EMERGENCY · NOW"** banner sits above everything: "Bus 14 broke down at Ambience Mall: 22 children on board since 7:14 am · engine overheating · spare Bus 25 is 14 minutes away · Dhruva wrote the message to 38 families". Buttons "Send spare bus and tell parents" and "Call bus". Tapping the first flashes "Bus 25 sent with Mr. Kishore · 38 families told · school informed"; the banner is replaced by "Bus 14 handled · spare Bus 25 reaches the children at 7:31 am · parents told" and the live board shows Bus 14 "Late · Spare Bus 25 reaches them 7:31 am".
- Then "6 THINGS NEED YOU · 1 OF 6" (Bus 14 is removed from the list as it is in the banner):

1. "Bus 21 hasn't started": "Mrs. Meena hasn't tapped Start · the bus was due out at 6:50 am" -> "Call Mrs. Meena" (flash "Calling Mrs. Meena…", then "Bus 21 left at 7:02 am · 34 families told it is 12 minutes late").
2. "Bus 9 is 18 minutes late": "Sector 53 underpass is waterlogged · new times worked out for every stop" -> "Tell parents" ("36 families told the new time for their stop").
3. "Routes 7 and 12: review with parents Mon 12 Oct, 4 pm": "Pickups moved 35 minutes earlier on 29 Sep · 26 of 38 long-absent students in Classes 9–12 ride these routes · Dhruva drafted 2 options" -> "Send options" ("Two options sent to Ms. Neelam Mehra for Monday's meeting"; the card then says Option A (pickup back to 7:05 am with a second bus) and option B (two extra stops) are with the principal).

4. "5 parent messages": "Late bus, a new pickup person, a stop change, a complaint and a fee question · Dhruva added the facts to each" -> "Open messages".
5. "23 children ride without a transport fee": "Found when fees synced from accounts at 7:20 am · 6 more pay but aren't on any route" -> "Review".
6. "2 buses have papers due this month": "Bus 7 fitness certificate ends 20 Oct · Bus 18 insurance ends 28 Oct" -> "Book renewals" ("Fitness test booked for Bus 7 · Bus 18 insurance renewal sent to accounts").

- Also a "7 safety checks need you" card (2 Headcount, 3 Speed and route, 2 Staff cover). **Attendant, Bus 7:** opens to "Bus 7 · Morning pickup", "31 / 42 on the bus", "Stop 9 / 12", a big "Next stop: Sector 46 market · 5 children · due 7:21" card with "Reached stop", and a "SOS and help" button. At the stop she taps each child; she cannot leave until every child is marked; the parent of each child gets a message the instant she taps.

Screens: Transport in-charge

Today (Desktop: "Today" · Phone: "Today")

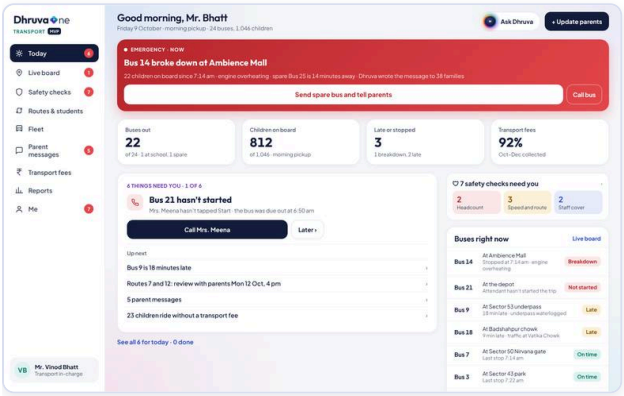

Desktop · Today

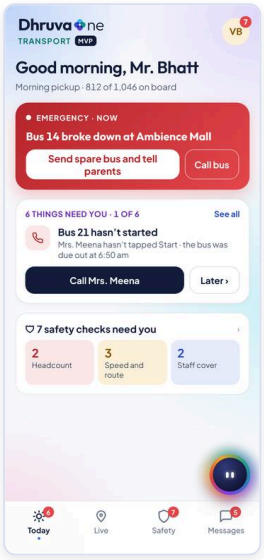

Phone · Today

- **What it shows (desktop):** header "Good morning, Mr. Bhatt · Friday 9 October · morning pickup · 24 buses, 1,046 children", buttons "Ask Dhruva" and "+ Update parents" (flash "Update parents: pick one bus or all · Dhruva drafts in English and Hindi"). Emergency banner (above). KPI tiles: "Buses out 22 · of 24 · 1 at school, 1 spare" (23 after Bus 21 leaves); "Children on board 812 · of 1,046 · morning pickup"; "Late or stopped 3 · 1 breakdown, 2 late" (updates as items are handled); "Transport fees 92% · Oct-Dec collected". The focus card and "Up next" list; a "7 safety checks need you" tile opens Safety checks; "Buses right now" mini-list (Bus 14 Breakdown, Bus 21 Not started, Bus 9 Late, Bus 18 Late, Bus 7/3/12 On time, Bus 5 At school) with "Live board" link. Navigation badges: Today 6, Live board 1, Safety checks 7, Parent messages 5, Me 7.
- **What it shows (phone):** "Good morning, Mr. Bhatt · Morning pickup · 812 of 1,046 on board", the emergency card with "Send spare bus and tell parents" and "Call bus", the focus card ("6 THINGS NEED YOU · 1 OF 6", "See all", "Later ›"), and the safety card "7 safety checks need you · 2 Headcount · 3 Speed and route · 2 Staff cover". Bottom tabs: "Today 6", "Live", "Safety 7", "Messages 5". Phone has no tabs for Routes, Fleet, Fees, Reports.
- **Functions:** all card buttons above; "Call bus" flashes "Calling Mrs. Rani Kumari on Bus 14…" (the attendant); "See all 6 for today · 0 done"; KPI tiles.
- **Dhruva help:** pre-wrote the breakdown message to 38 families, worked out each stop's new time for Bus 9, drafted routes 7 and 12 options. Suggested questions: "Which buses are late most often?" (Bus 9 late 7 of last 10 mornings at the Sector 53 underpass; leaving the Arcadia stop 8 minutes earlier would fix most of it), "Is transport paying for itself?" (fees about ₹31.2 lakh a month against ₹19.2 lakh cost; only Bus 14 runs at a loss this month), "Which buses have seats free?" (Bus 12 has 8, Bus 21 has 8, Bus 9 has 6; Bus 7 and Bus 18 are full). Each answer has a source ("Attendant stop taps, last 10 school days", "Fee ledger (synced 7:20 am) and transport expenses", "Route lists").

Live board (Desktop: "Live board" · Phone: "Live")

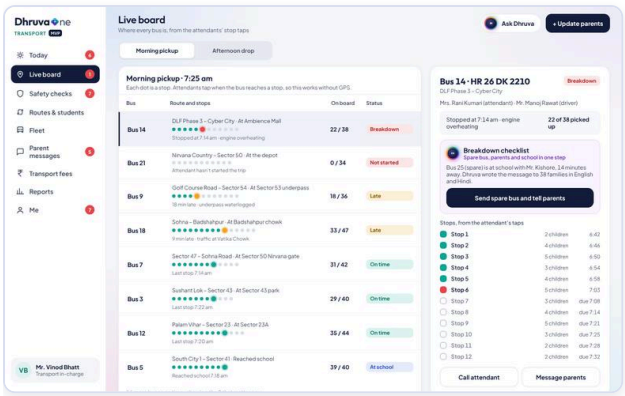

Desktop · Live board

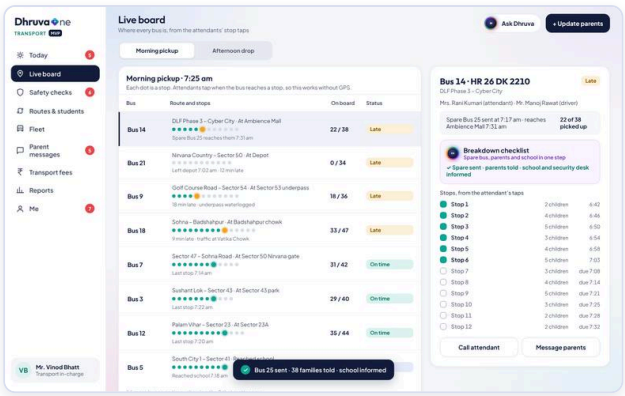

Desktop · Live spare sent

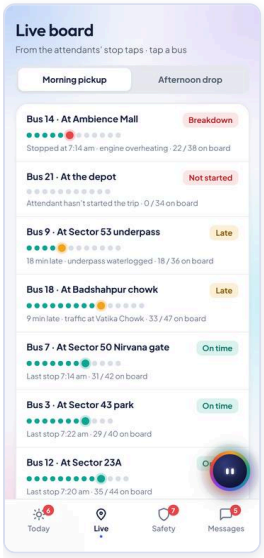

Phone · Live

- **What it shows:** "Where every bus is, from the attendants' stop taps". Tabs "Morning pickup" / "Afternoon drop". "Morning pickup · 7:25 am: Each dot is a stop. Attendants tap when the bus reaches a stop, so this works without GPS." One row per bus (8 that matter now; "16 more buses on time · showing the 8 that matter now"): Bus 14 DLF Phase 3 - Cyber City, at Ambience Mall, 22/38, Breakdown; Bus 21 Nirvana Country - Sector 50, at the depot, 0/34, Not started; Bus 9 Golf Course Road - Sector 54, at Sector 53 underpass, 18/36, Late (18 min, underpass waterlogged); Bus 18 Sohna - Badshahpur, 33/47, Late (9 min); Bus 7 Sector 47 - Sohna Road, 31/42, On time; Bus 3 Sushant Lok - Sector 43, 29/40, On time; Bus 12 Palam Vihar - Sector 23, 35/44, On time; Bus 5 South City 1 - Sector 41, 39/40, "At school". Each row has a dot trail (green passed, red/amber current dot for breakdown/late).
- **Bus detail (desktop right panel, phone bottom sheet):** "Bus 14 · HR 26 DK 2210", status chip, route, "Mrs. Rani Kumari (attendant) · Mr. Manoj Rawat (driver)", status text and "22 of 38 picked up", a purple "Breakdown checklist · Spare bus, parents and school in one step" with the Dhruva-written message note ("Bus 25 (spare) is at school with Mr. Kishore, 14 minutes away. Dhruva wrote the message to 38 families in English and Hindi.") and "Send spare bus and tell parents" (-> "Bus 25 sent · 38 families told · school informed"); "Stops, from the attendant's taps" (12 stops with children count and time, red dot where the bus stopped, future stops "due 7:08" etc.); "Call attendant" ("Calling <name>…") and "Message parents" ("Message to 38 families on Bus 14 · Dhruva drafted it, you check before it goes").
- **Afternoon drop view:** a log of the afternoon trips: Bus 7 "33 of 41 handed over · 8 on the bus · Next: Sector 44 Apparel House 2:04 pm · last stop Sector 46 market 2:22 pm"; Bus 12 "Zoya Siddiqui (3–A): nobody at the stop · stays on the bus · Mother called · will collect from school at 2:45 pm" (red); Bus 9 "Running 6 minutes late · Parents told the new times"; Bus 3 "All 40 handed over · bus checked empty · Trip closed at 1:58 pm".
- **Rules:** works without GPS (stop taps); status colours: green on time, amber late, red needs you, blue at school.

Safety checks (Desktop: "Safety checks" · Phone: "Safety")

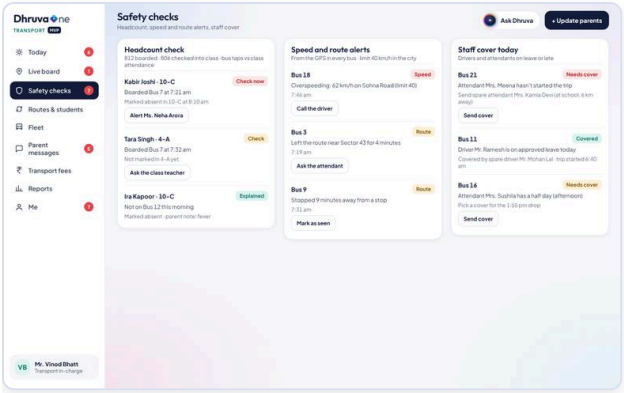

Desktop · Safety checks

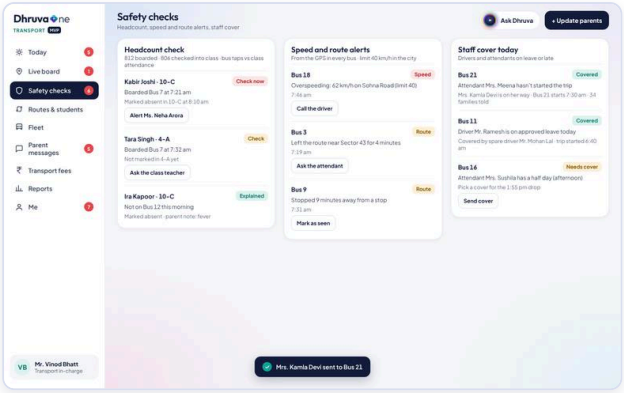

Desktop · Safety cover done

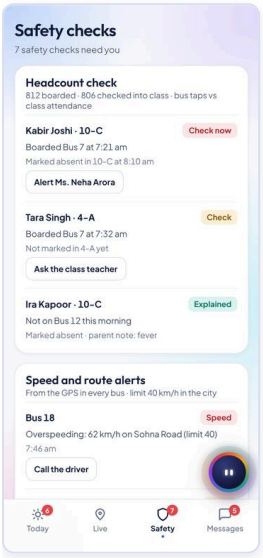

Phone · Safety

- **Headcount check** ("812 boarded · 806 checked into class · bus taps vs class attendance"): Kabir Joshi 10–C, "Boarded Bus 7 at 7:21 am", "Marked absent in 10–C at 8:10 am", chip "Check now", action "Alert Ms. Neha Arora" (flash "Ms. Neha Arora told · Kabir is on campus, not in class"); Tara Singh 4–A, "Boarded Bus 7 at 7:32 am · Not marked in 4–A yet", "Check", action "Ask the class teacher" ("Class teacher asked to mark Tara"); Ira Kapoor 10–C "Explained · Not on Bus 12 this morning · Marked absent · parent note: fever" (no action).
- **Speed and route alerts** ("From the GPS in every bus · limit 40 km/h in the city"): Bus 18 Speed "Overspeeding: 62 km/h on Sohna Road (limit 40)" 7:46 am -> "Call the driver" (flash "Calling Mr. Ajit Singh · logged in the driver's record"); Bus 3 Route "Left the route near Sector 43 for 4 minutes" 7:19 am -> "Ask the attendant"; Bus 9 Route "Stopped 9 minutes away from a stop" 7:31 am -> "Mark as seen" (flash "Logged"); after action the chip reads "Handled".
- **Staff cover today** ("Drivers and attendants on leave or late"): Bus 21 "Needs cover · Attendant Mrs. Meena hasn't started the trip · Send spare attendant Mrs. Kamla Devi (at school, 6 km away)" -> "Send cover" (flash "Mrs. Kamla Devi sent to Bus 21"; row becomes "Covered · Mrs. Kamla Devi is on her way · Bus 21 starts 7:30 am · 34 families told" and Bus 21 on the live board changes to Late); Bus 11 "Covered · Driver Mr. Ramesh is on approved leave today · Covered by spare driver Mr. Mohan Lal · trip started 6:40 am"; Bus 16 "Needs cover · Attendant Mrs. Sushila has a half day (afternoon) · Pick a cover for the 1:55 pm drop" -> "Send cover" (flash "Cover set for Bus 16"; "Mrs. Pushpa (Bus 12) covers both drops · parents told").
- Counters at the top ("7 safety checks need you") decrease as items are handled ("All safety checks clear").

Parent messages (Desktop: "Parent messages" · Phone: "Messages")

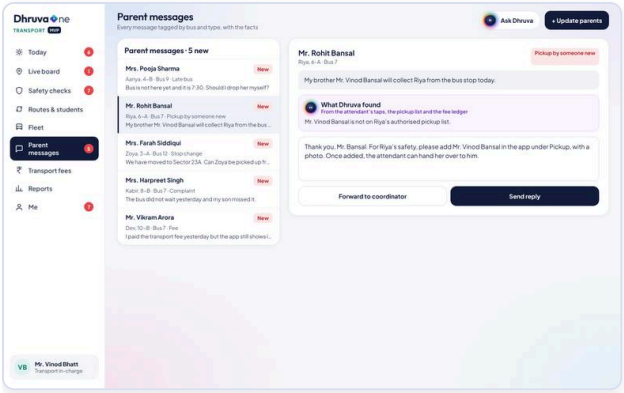

Desktop · Message thread

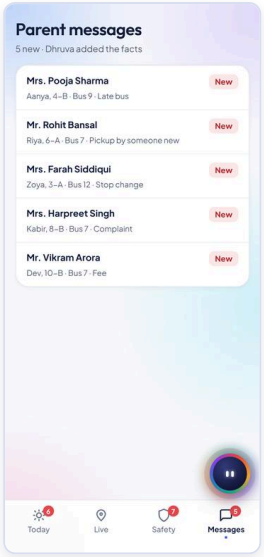

Phone · Messages

- **What it shows:** "Every message tagged by bus and type, with the facts" (phone: "5 new · Dhruva added the facts"). Five sample threads, each with a type tag and a status chip (New, Replied, With coordinator): Mrs. Pooja Sharma, Aanya 4–B, Bus 9, "Late bus" ("Bus is not here yet and it is 7:30. Should I drop her myself?"); Mr. Rohit Bansal, Riya 6–A, Bus 7, "Pickup by someone new" ("My brother Mr. Vinod Bansal will collect Riya from the bus stop today."); Mrs. Farah Siddiqui, Zoya 3–A, Bus 12, "Stop change"; Mrs. Harpreet Singh, Kabir 8–B, Bus 7, "Complaint" ("The bus did not wait yesterday and my son missed it."); Mr. Vikram Arora, Dev 10–B, Bus 7, "Fee" ("I paid the transport fee yesterday but the app still shows it as due.").
- **Thread view:** the parent's message; "What Dhruva found · From the attendant's taps, the pickup list and the fee ledger" (for Aanya: "Bus 9 is 18 minutes late: the Sector 53 underpass is waterlogged. New time at her stop: 7:41 am."; for Riya: "Mr. Vinod Bansal is not on Riya's authorised pickup list."; for Zoya: "Bus 12 stops at Sector 23A at 7:20 am · 2 seats free · same fee slab."; for Kabir: "Attendant tapped 'Reached Sector 46 market' at 7:21 am and left at 7:23 am · Kabir was marked not at the stop."; for Dev: "Payment of ₹8,400 received 8 Oct, 6:12 pm · synced from the fee ledger at 7:20 am · now shows as paid."); an editable Dhruva-drafted reply (desktop; drafts like "Thank you, Mr. Bansal. For Riya's safety, please add Mr. Vinod Bansal in the app under Pickup, with a photo. Once added, the attendant can hand her over to him."); buttons "Send reply" (flash "Reply sent to <name>"; "✓ Reply sent on the app, with an SMS backup"; counter drops to 4 new) and "Forward to coordinator" (flash "Forwarded to Mr. Mahesh Rana · <name> told"; "✓ Forwarded to Mr. Mahesh Rana, bus coordinator · parent told who is handling it"). On phone the draft is shown with the same two buttons (verified by sending a reply).
- **Rules:** the pickup-by-new-person case never approves directly; it asks the parent to add the person with a photo.

Routes and students (Desktop only: "Routes & students")

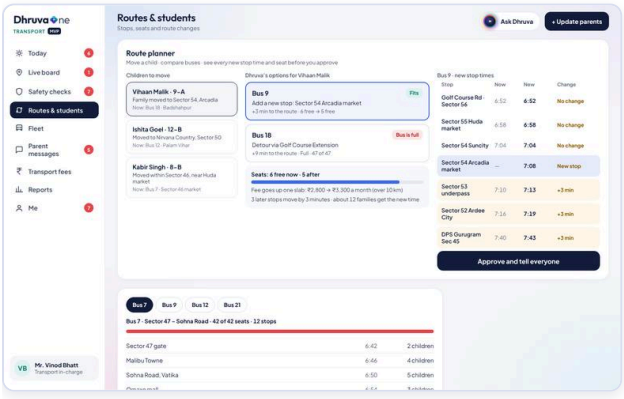

Desktop · Routes students

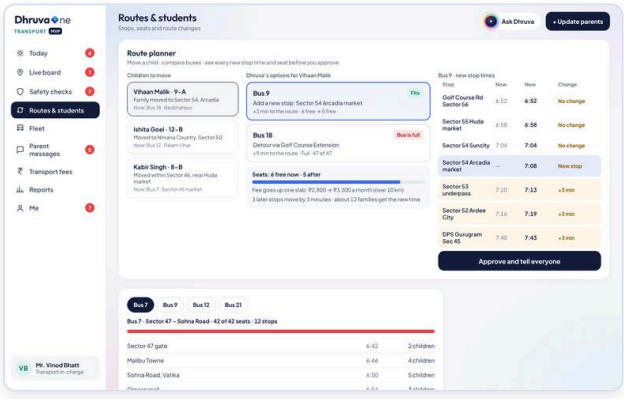

Desktop · Route planner

- **What it shows:** "Route planner · Move a child · compare buses · see every new stop time and seat before you approve". "Children to move": Vihaan Malik 9–A ("Family moved to Sector 54, Arcadia · Now: Bus 18 · Badshahpur"), Ishita Goel 12–B ("Moved to Nirvana Country, Sector 50 · Now: Bus 12 · Palam Vihar"), Kabir Singh 8–B ("Moved within Sector 46, near Huda market · Now: Bus 7 · Sector 46 market").
- **Dhruva's options (pick one):** for Vihaan: Bus 9 "Fits": "Add a new stop: Sector 54 Arcadia market · +3 min to the route · 6 free -> 5 free"; Bus 18 "Bus is full": "Detour via Golf Course Extension · +9 min to the route · Full · 47 of 47". Detail of the selected option: seat bar ("Seats: 6 free now · 5 after"), fee note ("Fee goes up one slab: ₹2,800 -> ₹3,300 a month (over 10 km)"), impact ("3 later stops move by 3 minutes · about 12 families get the new time"; for the full bus: "Adds 9 minutes for 31 children already on

board and the bus is full. Dhruva doesn't recommend this."), and a stop table "Bus 9 · new stop times" (Stop / Now / New / Change; new stop at 7:08, later stops +3 min). Ishita: "Existing stop: Nirvana gate" on Bus 21 (8 free -> 7 free, same fee slab ₹2,800) vs Bus 7 (not suitable); Kabir: "Move from Sector 46 market to Sector 46 Huda market" on Bus 7, no fee change.

- **Approve:** "Approve and tell everyone" (disabled for unsuitable options). Flash "Route updated · <parent> told the new pickup time · 12 families told the new stop times · attendant's list updated". Result line "✓ Approved · Vihaan Malik moves to Bus 9 from Monday · parents, attendant and fee bill updated".
- **Route list:** pills "Bus 7", "Bus 9", "Bus 12", "Bus 21" show each route's stops with times and children per stop ("Bus 7 · Sector 47 - Sohna Road · 42 of 42 seats · 12 stops", full bus bar in red).
- **Rules:** a full bus cannot take a child; fee slabs apply automatically (Up to 5 km ₹2,200, 5 to 10 km ₹2,800, Over 10 km ₹3,300 a month); route change updates parents, attendant and fee bill.

Fleet (Desktop only: "Fleet")

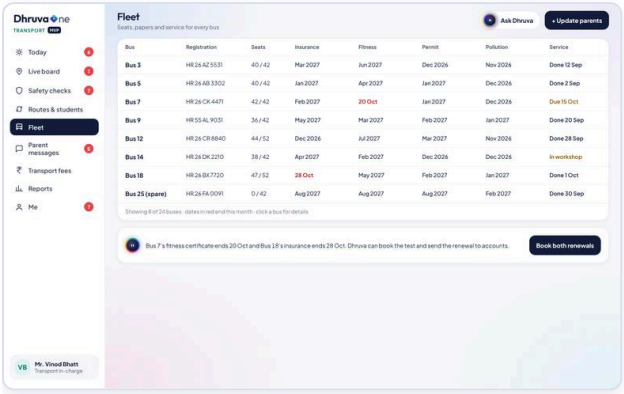

Desktop · Fleet

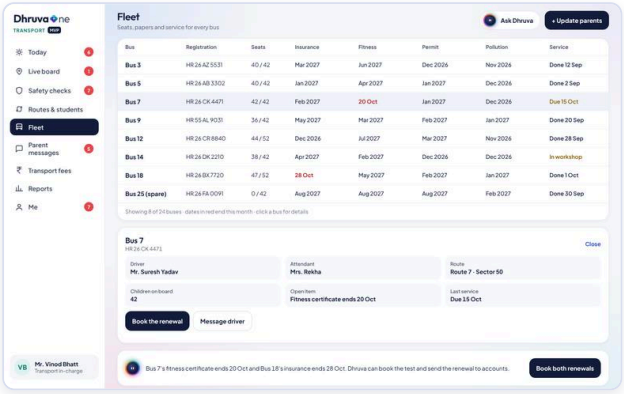

Desktop · Fleet bus

- **What it shows:** "Seats, papers and service for every bus": table Bus, Registration, Seats, Insurance, Fitness, Permit, Pollution, Service (Bus 3 HR 26 AZ 5531 40/42... Done 12 Sep; Bus 7 HR 26 CK 4471 42/42, Fitness "20 Oct" in red, Service "Due 15 Oct"; Bus 14 "In workshop"; Bus 18 Insurance "28 Oct" in red; Bus 25 (spare) HR 26 FA 0091 0/42). "Showing 8 of 24 buses · dates in red end this month · click a bus for details". Banner: "Bus 7's fitness certificate ends 20 Oct and Bus 18's insurance ends 28 Oct. Dhruva can book the test and send the renewal to accounts." with "Book both renewals" (flash "Fitness test booked for Bus 7 · Bus 18 insurance renewal sent to accounts"; button "✓ Renewals booked").
- **Bus detail:** driver, attendant, route, children on board, open item, last service. Buttons: "Book the renewal" (Bus 7, Bus 18; flash "Bus 7: Fitness test booked · Mon 19 Oct"; "Renewal sent to accounts"), "Send spare bus" (Bus 14), "Book a service" (others; "Service booked · Sat 17 Oct"), "Message driver" ("Message to Mr. Suresh Yadav drafted · you review before it goes"), "Close". A mobile-style list view shows each bus with chip "OK / Needs you / Done".

Transport fees (Desktop only: "Transport fees")

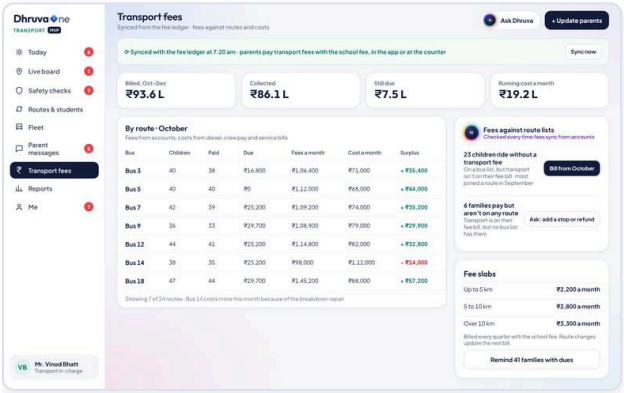

Desktop · Transport fees

- **What it shows:** "Synced from the fee ledger · fees against routes and costs". Banner "Synced with the fee ledger at 7:20 am · parents pay transport fees with the school fee, in the app or at the counter" with "Sync now" (flash "Fees synced from accounts · 4 new payments since 7:20 am"; Collected ₹86.1 L -> ₹86.4 L, Still due ₹7.5 L -> ₹7.2 L). Totals: Billed Oct-Dec ₹93.6 L, Collected ₹86.1 L, Still due ₹7.5 L, Running cost a month ₹19.2 L. "By route · October" table: Bus, Children, Paid, Due, Fees a month, Cost a month, Surplus (Bus 3 40/38 ₹16,800 due ₹1,06,400 fees ₹71,000 cost +₹35,400;... Bus 14 –₹14,000 in red "because of the breakdown repair"; Bus 18 +₹57,200).
- **Fees against route lists** ("Checked every time fees sync from accounts"): "23 children ride without a transport fee" ("On a bus list, but transport isn't on their fee bill · most joined a route in September") -> "Bill from October" (flash "23 families billed for transport from October · accounts told"); "6 families pay but aren't on any route" ("Transport is on their fee bill, but no bus list

has them") -> "Ask: add a stop or refund" (flash "6 families asked: add a stop, or refund the transport fee"). "Fee slabs": Up to 5 km ₹2,200; 5 to 10 km ₹2,800; Over 10 km ₹3,300 a month. "Remind 41 families with dues" (flash "WhatsApp reminders sent to 41 families · pay link included"; "✓ Reminders sent").

Reports (Desktop only: "Reports")

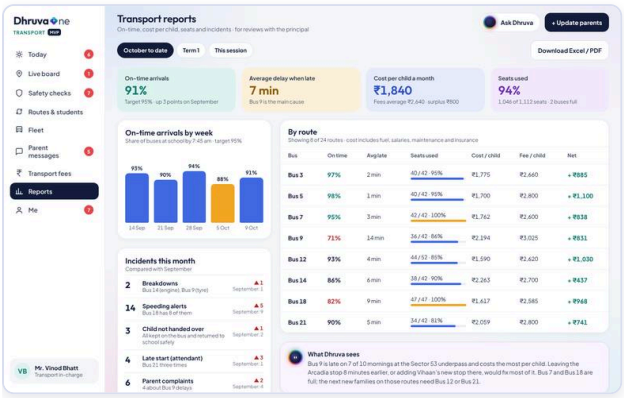

Desktop · Reports

- **What it shows:** "On-time, cost per child, seats and incidents · for reviews with the principal". Period pills "October to date", "Term 1", "This session"; "Download Excel / PDF" (flash "Transport report for October saved as Excel and PDF"). KPI tiles: On-time arrivals 91% (target 95%, up 3 points on September); Average delay when late 7 min (Bus 9 main cause); Cost per child a month ₹1,840 (fees average ₹2,640, surplus ₹800); Seats used 94% (1,046 of 1,112 seats, 2 buses full). Weekly bar chart "On-time arrivals by week" (14 Sep 93%, 21 Sep 90%, 28 Sep 94%, 5 Oct 88%, 9 Oct 91%; share of buses at school by 7:45 am). "Incidents this month" compared with September: 2 Breakdowns (Bus 14 engine, Bus 9 tyre), 14 Speeding alerts (Bus 18 has 8), 3 Child not handed over (all kept on the bus and returned to school safely), 4 Late start by attendant (Bus 21 three times), 6 Parent complaints (4 about Bus 9). "By route" table (Bus, On time, Avg late, Seats used, Cost/child, Fee/child, Net; Bus 9 71%, 14 min). Insight sentence: Bus 9 is late on 7 of 10 mornings at the Sector 53 underpass and costs the most per child; leaving the Arcadia stop 8 minutes earlier, or adding Vihaan's new stop there, would fix most of it; Bus 7 and Bus 18 are full.

Me (Desktop: "Me" · Phone: avatar VB top right)

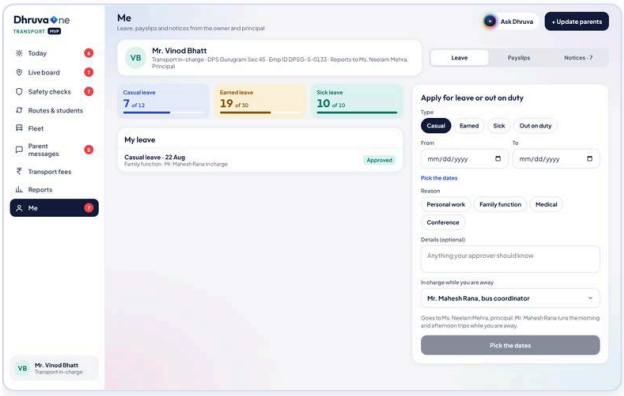

Desktop · Me

- Same staff-self page as other roles: Casual 7 of 12, Earned 19 of 30, Sick 10 of 10; apply for leave or out on duty (types, dates, reason pills, "In charge while you are away": Mr. Mahesh Rana, bus coordinator / Mr. Baldev Singh, security supervisor); routing "Goes to Ms. Neelam Mehra, principal. Mr. Mahesh Rana runs the morning and afternoon trips while you are away" (over 3 days also goes to the group HR head); payslips (bank and earnings shown); notices from owner and principal.

Screens: Bus attendant (phone only) — the phone app

Header on every screen: "BUS ATTENDANT" (MVP), language toggle **"हिंदी"** (becomes "English"), tabs **"Morning"/"Afternoon"**, bus and trip title, "● Online · saves on the phone if the network drops" status. Bottom tabs: **"Trip"**, **"Children"**, **"SOS"**, **"Me"**. All text, stop names and relation labels have a Hindi version (for example "अगला स्टॉप", "बच्चा आ गया", "सोहना रोड, वाटिका"); a "🔊 Read aloud" button speaks the next stop.

Trip, morning pickup (Phone: "Trip" with "Morning")

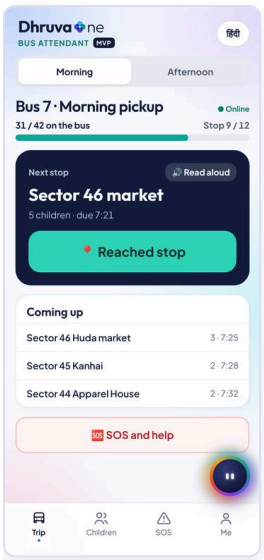

Phone · Trip

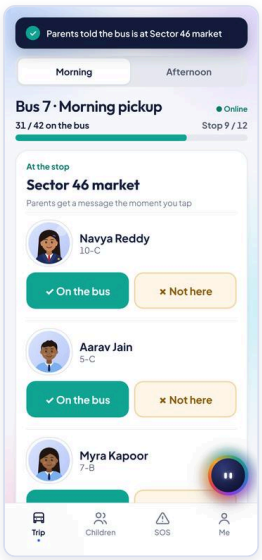

Phone · At stop

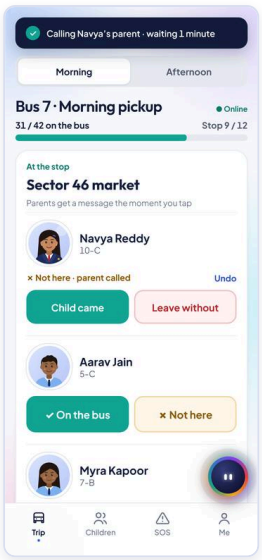

Phone · Marked not here

- **Arrive state:** "Bus 7 · Morning pickup", "31 / 42 on the bus" with progress bar, "Stop 9 / 12", card "Next stop · Sector 46 market · 5 children · due 7:21", buttons "🔊 Read aloud" (toast "🔊 'Next stop: Sector 46 market'") and "📍 Reached stop" (toast "Parents told the bus is at Sector 46 market"). "Coming up": Sector 46 Huda market 3 · 7:25; Sector 45 Kanhai 2 · 7:28; Sector 44 Apparel House 2 · 7:32. Button "SOS and help".
- **At-the-stop state:** "At the stop · Sector 46 market · Parents get a message the moment you tap". One card per child with photo, name, class: Navya Reddy 10–C, Aarav Jain 5–C, Myra Kapoor 7–B, Kabir Singh 8–B, and Diya Sharma 1–B ("Absent today · parent told the school", with "Undo"). Two big buttons per child: **"✓ On the bus"** (toast "Aarav's parents: 'On Bus 7 at 7:21'"; row "✓ On the bus · parent told"; count rises) and **"× Not here"** (toast "Calling Navya's parent · waiting 1 minute"; row "× Not here · parent called"; then two new buttons **"Child came"** (back to on the bus) and **"Leave without"** (toast "Navya left at the stop · Mr. Bhatt and the parent are told"; row "× Left at the stop · Mr. Bhatt and the parent are told")), and "Undo" on any marked row. The big button **"Leave stop →"** is dimmed with hint "Tap every child before you leave" until every child is marked.
- **After the last stop:** button "Reached school" (toast "School told: Bus 7 arrived · 31 children") then the **"Check the bus is empty"** step: "Walk to the back. Every child must be off before the trip can close." Three tick boxes: "I walked to the last seat", "I checked under every seat", "No bags or children left"; button "Bus is empty · close the trip" (toast "Tick all three checks first" if incomplete; on success "Trip closed · bus checked empty at 7:43 am"; summary "All 31 children at school · bus checked empty"). Then optional **handover note to Mr. Bhatt**: pills "All fine", "Bus needs cleaning", "Seat or window damaged", "A child felt unwell", "Roads were slow" and a send button ("Note sent to Mr. Bhatt"; "Tap at least one" if none). "Start the demo again" resets.

Trip, afternoon drop (Phone: "Trip" with "Afternoon")

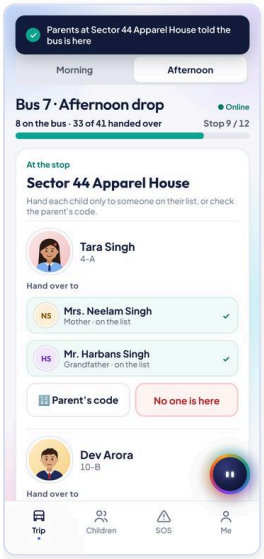

Phone · Pm handover

- Heading "Bus 7 · Afternoon drop", "8 on the bus · 33 of 41 handed over". Stops with times: Sector 44 Apparel House 2:04 (Tara Singh 4–A, Dev Arora 10–B), Sector 45 Kanhai 2:08 (Ishaan Malik 8–B, Sara Khan 9–C), Sector 46 Huda market 2:13 (Riya Bansal

6–A, Anvi Mehra 7–B), Sector 46 market 2:22 (Navya Reddy 10–C, Myra Kapoor 7–B). "Reached stop" tells the parents at that stop the bus is here ("Parents at Sector 44 Apparel House told the bus is here").

- At each stop: "Hand each child only to someone on their list, or check the parent's code." Each child lists the people on the list with relationship (for Tara: Mrs. Neelam Singh, Mother; Mr. Harbans Singh, Grandfather; for Dev: Mr. Vikram Arora, Father, and "Walks home alone · Parent's written consent on file"; Ishaan: mother and driver Mr. Hari Prasad; Myra: mother and nanny Ms. Sunita). Tap a name to hand over (toast "Tara handed to Mrs. Neelam Singh · parents told"; row "✓ Handed to..."). If the adult is not on the list: "🔢 **Parent's code"** opens a code entry (matching shown as "Code matched · handed over", "code holder · code 4721 matched"); **"No one is here"** keeps the child on the bus (toast "Mr. Bhatt and <child>'s parent told · child stays on the bus", row "⚠ Stays on the bus · Mr. Bhatt and the parent are told"). "Leave stop →" is blocked until every child at the stop is resolved. At the end: "All handed over · back to the depot" or "<n> child still on the bus · go back to school", then the same "Check the bus is empty" ticks and summary ("Every child handed to a known adult · bus checked empty" or "1 child stayed on the bus and is back at school with Mr. Bhatt · bus checked empty").

Children (Phone: "Children")

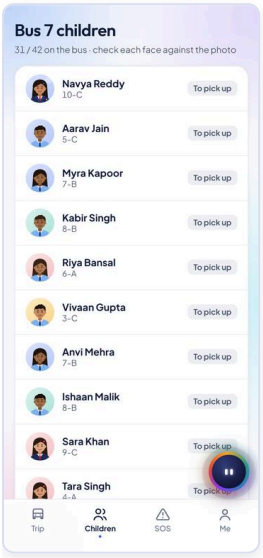

Phone · Children

- "Bus 7 children · 31 / 42 on the bus · check each face against the photo". List with photo, name, class and a status chip: "To pick up" (grey), "On the bus" (teal), "Not here" (red), "Absent" (amber, Diya Sharma 1–B), updated live from stop taps (Navya Reddy 10–C, Aarav Jain 5–C, Myra Kapoor 7–B, Kabir Singh 8–B, Riya Bansal 6–A, Vivaan Gupta 3–C, Anvi Mehra 7–B, Ishaan Malik 8–B, Sara Khan 9–C, Tara Singh 4–A, Dev Arora 10–B). Footer: "30 children picked up at the first 8 stops are not shown. Photos are sample illustrations."

SOS and help (Phone: "SOS")

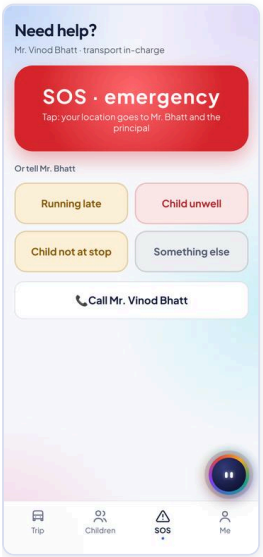

Phone · SOS

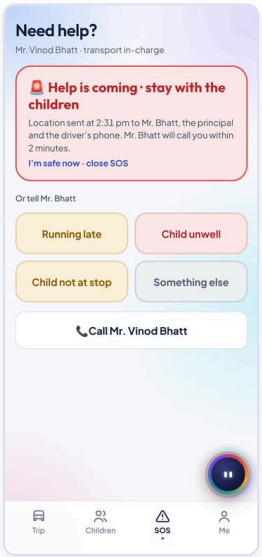

Phone · Sos sent

- "Need help? Mr. Vinod Bhatt · transport in-charge". Big red **"SOS · emergency"** ("Tap: your location goes to Mr. Bhatt and the principal"). Tapping starts a 3–2–1 countdown ("Sending SOS in 3") with **"Cancel"** (toast "SOS cancelled"); after the

countdown: "🚨 Help is coming · stay with the children", "Location sent at 2:31 pm to Mr. Bhatt, the principal and the driver's phone. Mr. Bhatt will call you within 2 minutes." and **"I'm safe now · close SOS"**. Below, "Or tell Mr. Bhatt": **"Running late"**, **"Child unwell"**, **"Child not at stop"**, **"Something else"** (toast "Mr. Vinod Bhatt told · he will call you"; button gets a tick); "Child unwell" first opens a list "Which child is unwell?" of riders; picking one tells "<child>'s parent, the school nurse and Mr. Bhatt". **"📞 Call Mr. Vinod Bhatt"**.

- Dhruva (attendant): voice or typed questions in Hindi or English: "Who is absent today?" (Diya Sharma 1–B at Sector 46 market, mother told the school at 6:10 am), "What time is the next stop?" (Sector 46 market 7:21, then Huda market 7:25, school 7:40), "Can someone else pick up Riya?" (only people on her authorised list; Mr. Vinod Bansal is not on it yet). Fallback: "I can help with your stops, children and who can pick them up. Speak or type in Hindi or English."

Me (Phone: "Me")

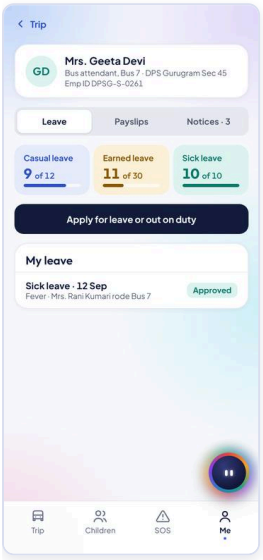

Phone · Me

- "Mrs. Geeta Devi · Bus attendant, Bus 7 · DPS Gurugram Sec 45 · Emp ID DPSG-S-0261". Leave Casual 9 of 12, Earned 11 of 30, Sick 10 of 10; "Apply for leave or out on duty"; history "Sick leave · 12 Sep · Fever · Mrs. Rani Kumari rode Bus 7 · Approved"; "In charge": Mrs. Rani Kumari or Mrs. Sushma, spare attendants; routing "Goes to Mr. Vinod Bhatt. A spare attendant rides Bus 7 while you are away" (over 2 days also to the principal); payslips (PNB, Basic ₹12,500, DA ₹2,250, HRA ₹1,800; PF ₹1,500, ESI ₹125); "Notices · 3" from the principal.

Gaps and differences between desktop and phone

- Phone (in-charge) has four tabs: Today, Live, Safety, Messages. **Desktop only:** Routes & students (route planner), Fleet, Transport fees, Reports, "+ Update parents", KPI tiles, "Buses right now" list, safety summary tile, forward-to-coordinator editing of the draft reply.
- Both platforms share the emergency banner, the Today queue, live board, safety checks (headcount, speed and route, staff cover), and messages, with the same one-tap actions.
- **Attendant app is phone only**: Trip, Children, SOS, Me; bilingual; no desktop equivalent. Morning and afternoon workflows differ (mark pickups vs hand over to listed people).

PART 4

Families and students

Parent

Student, Classes 6 to 8

Student, Classes 9 to 12

FAMILIES AND STUDENTS · PHONE

Parent

One calm phone app where a parent sees how each child is doing today, pays fees, talks to the right teacher, asks for leave, books a PTM slot, and follows the school bus.

Who uses it. Parents and guardians of children at a DPS Group campus or at a standalone school. One login covers all of a parent's children at that school (sample: Mr. Srinivas Reddy, father of Navya in Class 10–C and Arjun in Class 2–B at DPS Gurugram Sec 45).

On the following pages:

- Home (Phone: Home tab)
- Progress (Phone: Progress tab)
- Fees (Phone: Fees tab)
- Messages (Phone: Messages tab)
- Leave request (Phone: pushed from Home tile "Leave" or Progress > Attendance > "Apply for leave")
- PTM slot (Phone: pushed from Home tile "PTM slot" or the "Book" task)
- Notices (Phone: pushed from Home tile "Notices")
- Bus 7 tracker (Phone: pushed from the bus line on Home; only for children on transport)
- School calendar (Phone: pushed from "Calendar ›" on Home)
- Junior pod (Phone: Home tile "Junior pod" for a child without a student login, e.g. Arjun, Class 2)
- Kids switching and other profiles (Phone: child chip on any screen)
- Dhruva chat (Phone: orb button on every screen)

Business summary

The parent app replaces the diary, the fee counter, the WhatsApp class groups and the phone call to the office. A parent opens it and sees one child at a time, with the day's status (present, bus reached school), three headline numbers (attendance, last test, homework due) and a short list of things that need a decision. Fees can be ticked, paid by UPI, card or net banking, and a receipt arrives in the app and on WhatsApp. Messages are routed by topic to the right person, with a stated reply time, so teachers are not interrupted at night. For the school this means fewer office visits and calls, faster fee collection with automatic reminders, leave and consent captured with a record, and parents who can see that the school read their message or leave request. A parent with two children, or children at two different schools in the group, never needs a second login.

Daily story (what Dhruva surfaces first)

Friday 9 Oct, morning. The app opens on Home with "Good morning, Mr. Reddy" and Navya's card: "Present today", "Bus 7 reached school at 7:40 am", 94% attendance, 84% unit test 3, 2 homework due. Below it, Dhruva shows only one thing at a time under the heading "4 things need you today":

1. "Navya asked for leave · Wed 21 – Thu 22 Oct" (Family function), with "Confirm" so Ms. Arora can approve. This item exists because Navya applied from her own student app and the parent must confirm first.
2. "₹80,200 fees due · Due Thu 15 Oct" with "Pay".
3. "Book a PTM slot · Sat 31 Oct" with "Book".
4. "Read: Term 1 exam timings" (from the principal) with "Read". "Later ›" moves to the next item; "See all 4" opens all four at once (and the link becomes "One at a time"). Items disappear as they are done. When the list is empty the heading reads "Nothing needs you today". Below the task card are four tiles (Leave, PTM slot, Notices with a red count, Report card) and a "Coming up" strip ("Term 1 exams Mon 12 – Fri 16 Oct · Maths first", link "Calendar ›"). The Dhruva orb sits bottom right for questions in plain words.

Screens

The bottom bar has four tabs: **Home, Progress, Fees, Messages**. Leave, PTM, Notices, Bus, Calendar, Junior pod and message threads are pushed screens with a "Home" back link. The child chip at top right ("Navya ›") is on every screen.

Home (Phone: Home tab)

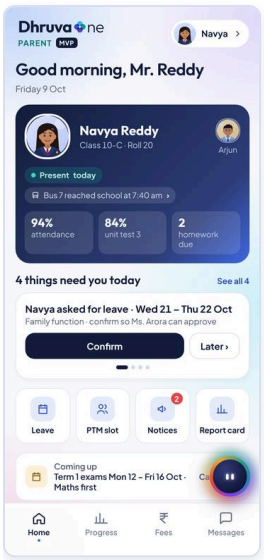

Phone · Home

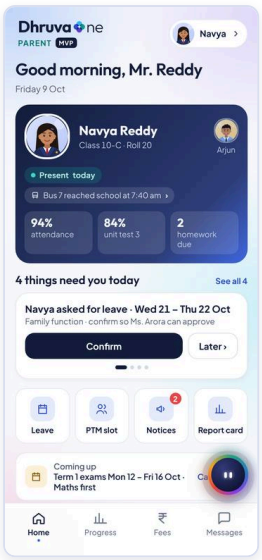

Phone · Start

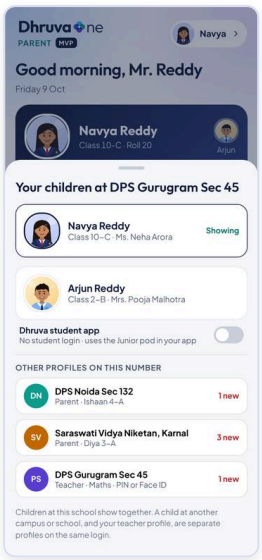

Phone · Kidsheet

- What it shows: greeting and date; child card (photo, name, "Class 10–C · Roll 20", today's attendance chip, bus line, three stat tiles); focus task card; four action tiles; "Coming up" strip; Dhruva orb.
- Functions:
- Child chip "Navya ›" (top right) and small "Arjun" avatar in the child card -> opens the "Your children at DPS Gurugram Sec 45" sheet (see Kids switching).
- "Present today" chip: shows today's status; sample sub-text "Marked 8:04 am by Ms. Neha Arora".
- Bus line "Bus 7 reached school at 7:40 am ›" -> Bus screen (only for a child who uses transport; Arjun's line reads "You drop and pick up · gate pass 2–B-11" and is not tappable).
- Stat tiles "94% attendance" -> Progress > Attendance; "84% unit test 3" and "2 homework due" -> Progress > Marks (which also lists homework).
- Focus card buttons: "Confirm" (leave), "Pay" (opens Fees), "Book" (opens PTM), "Read" (opens Notices); "Later ›" skips to the next; "Not now" appears on the leave item in the See-all view and dismisses it; page dots show position; "See all 4" / "One at a time" toggles the list view.
- Tiles: "Leave" -> Leave form; "PTM slot" -> PTM; "Notices" (badge = unread items needing a response) -> Notices; fourth tile depends on the child: "Report card" for Navya (age 11 and over), "Junior pod" for Arjun (no student login), "Student app" for a young child who has been given a student login.
- "Coming up" strip -> Calendar.
- Interactions:
- Tap "Confirm" on the leave item: toast "Confirmed · sent to Ms. Neha Arora"; the item leaves the list.
- Tap "Student app" tile (only when a child has a login): toast "Navya uses her own Dhruva student app · you see the same homework and marks here".
- Switching child changes every number, task and tile on the app and shows toast "Now showing Arjun".
- Dhruva (assistant) help on this screen: orb at bottom right opens a chat sheet (see Dhruva chat below).
- Rules & edge cases: the list of tasks is built from live conditions: leave awaiting parent confirmation (Navya only), any unpaid fee, no PTM slot booked for that child, consent pending (Arjun: zoo trip), a notice that asks for "I have read this". Marks and the report-card tile depend on child age: Class 2 shows descriptive grades, not marks.

Progress (Phone: Progress tab)

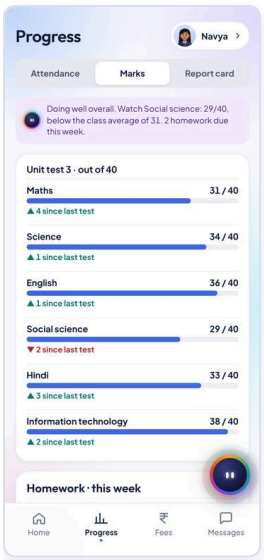

Phone · Progress

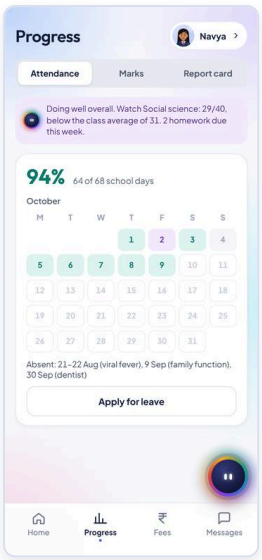

Phone · Attendance

Phone · Report card

- What it shows: a three-way switch "Attendance | Marks | Report card" under the child chip, with a one-line Dhruva insight above the content: "Doing well overall. Watch Social science: 29/40, below the class average of 31. 2 homework due this week." For Arjun it reads "Arjun is on track. Nothing needs you in Progress today. 1 homework due this week."
- Functions:
- **Marks** (default): "Unit test 3 · out of 40" with a bar per subject (Maths 31/40 "▲ 4 since last test", Science 34, English 36, Social science 29 "▼ 2 since last test", Hindi 33, Information technology 38) and below it "Homework · this week": subject, title, teacher comment, status chip ("Returned · 8/10", "Handed in", "Due Sat 10 Oct · Not started yet"). For Class 2 the same space shows "Term 1 so far · descriptive grades (Class 2)" with a grade and a teacher comment per area (English A "Reads fluently; spelling improving").
- **Attendance:** big percentage ("94%", "64 of 68 school days"), a month calendar for October (present, holiday, weekend, future days shaded), an "Absent:" list with reasons ("21–22 Aug (viral fever), 9 Sep (family function), 30 Sep (dentist)") and a button "Apply for leave" that opens the Leave form.
- **Report card:** headline result ("Promoted to Class 10 · 87.4% overall"), three summary lines ("Strongest: Information technology (94)", "Needs practice: Maths (81)", "Improved in 6 of 6 subjects since Term 1"), then the formal card: school, student, class and roll, session, subject table (Term 1, Term 2, Total, Grade), "Co-scholastic and personal qualities", attendance days, class-teacher remark, and "Download report card (PDF)". A footer states "Term 1 report card for 2026–27 is published on Sat 31 Oct".
- Interactions: "Download report card (PDF)" -> toast "Report card PDF downloaded · signed by the principal". "Apply for leave" -> Leave screen. Tapping the stat tiles on Home jumps straight to the right segment.
- Dhruva help on this screen: the insight sentence is generated from marks, class average and homework (it names the weakest subject relative to class average). The orb can answer "How is Navya doing before the exams?" with a short summary and a "Marks and attendance" source line.

Fees (Phone: Fees tab)

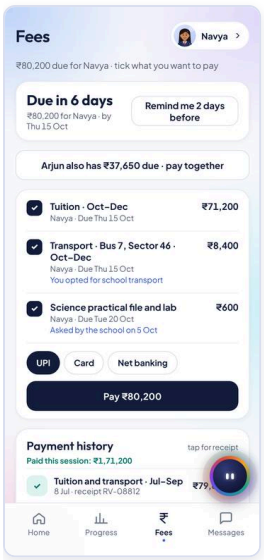

Phone · Fees

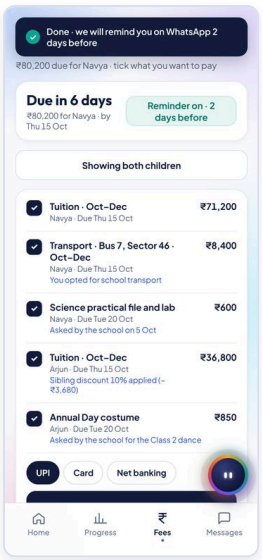

Phone · Fees both

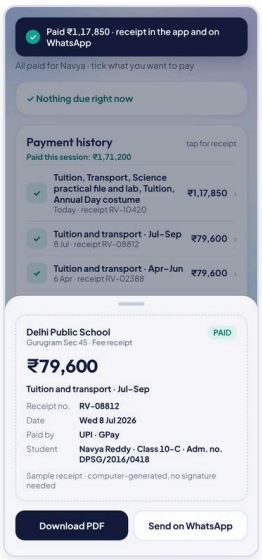

Phone · Receipt

- What it shows: headline "₹80,200 due for Navya · tick what you want to pay"; a countdown card "Due in 6 days · ₹80,200 for Navya · by Thu 15 Oct" (turns red at 3 days or fewer); line items with tick boxes; payment method; pay button; payment history.
- Functions:
- "Remind me 2 days before" toggle on the countdown card (turns green "Reminder on · 2 days before").
- Sibling line "Arjun also has ₹37,650 due · pay together": tap to show both children's fees in one list ("Showing both children"); each line is tagged with the child's name.
- Line items, each tickable: "Tuition · Oct–Dec ₹71,200", "Transport · Bus 7, Sector 46 · Oct–Dec ₹8,400" (note "You opted for school transport"), "Science practical file and lab ₹600" (note "Asked by the school on 5 Oct"). Arjun's: "Tuition · Oct–Dec ₹36,800" ("Sibling discount 10% applied (– ₹3,680)"), "Annual Day costume ₹850", and "Zoo trip ₹450" which only appears after consent is given in Notices.
- Method pills "UPI | Card | Net banking".
- Pay button, label updates with the ticked total ("Pay ₹80,200", "Pay ₹1,17,850" when both children are shown; greyed when nothing is ticked).
- "Payment history · tap for receipt" with "Paid this session" total and rows: "Tuition and transport · Jul–Sep, 8 Jul · receipt RV-08812 ₹79,600", "Tuition and transport · Apr–Jun RV-02388", "Annual charges 2026–27, 2 Apr, RV-02210 ₹12,000".
- Receipt sheet: school and campus name, "PAID", amount, item, receipt number, date, "Paid by" (e.g. "UPI · GPay"), student with class and admission number (DPSG/2016/0418), "Sample receipt · computer-generated, no signature needed", buttons "Download PDF" and "Send on WhatsApp".
- Interactions:
- Tick or untick a line to change the total. Tap "Pay": toast "Paid ₹1,17,850 · receipt in the app and on WhatsApp"; the lines vanish, the screen shows "✓ Nothing due right now" (or "All paid for Navya"), and a new row is added to history with a receipt number (RV-10420 in the sample).
- Remind me: toast "Done · we will remind you on WhatsApp 2 days before"; tap again: "Reminder removed".
- Tap a history row: receipt sheet; "Download PDF" -> "Receipt RV-08812 saved as PDF"; "Send on WhatsApp" -> "Receipt sent to you on WhatsApp".
- No real payment gateway is shown; the three methods are selectors only.
- Dhruva help: asking "What do I need to pay this month?" returns a plain breakdown (Navya ₹71,200 + ₹8,400 + ₹600; Arjun ₹36,800 + ₹850; total due ₹1,17,850) with source "Fee invoices".
- Rules & edge cases: fee lines are per child and per invoice; consent-linked fees are added only after consent; sibling discount is applied by the school and shown as a note; the late-fee warning appears in the school-office message ("Pay by 15 Oct to avoid a late fee"). Partial payment is possible by unticking lines. (The old board earlier parent design also had "Pay in 3 parts"; this is not in the current board.)

Messages (Phone: Messages tab)

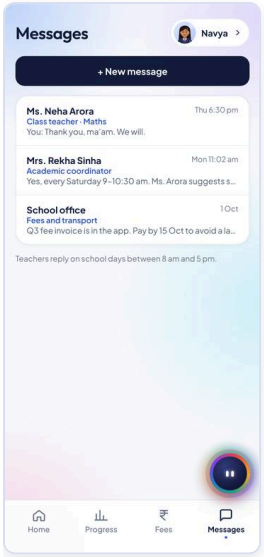

Phone · Messages

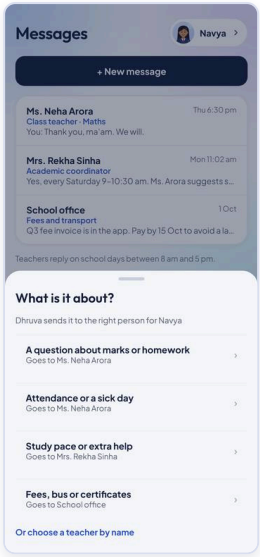

Phone · Newmessage

- What it shows: list of conversations for the selected child (teacher, coordinator, school office), each with last message and time, then the note "Teachers reply on school days between 8 am and 5 pm."
- Functions:
- "+ New message" opens "What is it about? Dhruva sends it to the right person for Navya" with four topics, each saying where it goes: "A question about marks or homework" -> Goes to Ms. Neha Arora (class teacher); "Attendance or a sick day" -> class teacher; "Study pace or extra help" -> Mrs. Rekha Sinha (academic coordinator); "Fees, bus or certificates" -> School office.
- "Or choose a teacher by name" expands a list: class teacher, each subject teacher (Ms. Kavya Reddy Science, Mrs. Anita Joshi English, Mr. Kunal Bose Social science), Mrs. Rekha Sinha, "School office · Fees, transport and certificates".
- Thread screen: header with name and role and "about Navya", a reply-time line ("Usually replies within 3 hours on school days · not after 7 pm or on Sundays"; for coordinator/principal "Usually replies within a school day"), message bubbles, a text box and "Send".
- Interactions: choosing a person with an existing thread opens it; otherwise a new thread opens with a greeting "Hello, how can I help you with Navya?". Sending a message appends it; about 3.5 seconds later a sample auto-reply appears ("Thank you for your message. I'll get back to you after classes today."). Threads are per child, except school-office and notices-type threads which are shared.
- Dhruva help: routing by topic is Dhruva's role ("Dhruva sends it to the right person").
- Rules & edge cases: quiet hours and reply expectations are stated up front; messages carry the child's name so the teacher knows the context; the school-office thread is common to both children.

Leave request (Phone: pushed from Home tile "Leave" or Progress > Attendance > "Apply for leave")

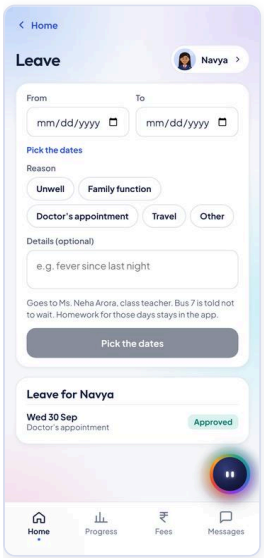

Phone · Leave

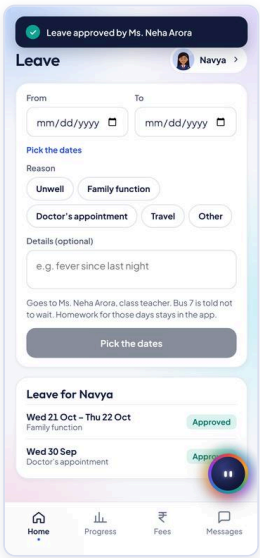

Phone · Leave approved

- What it shows: child chip, From and To date fields, reason pills ("Unwell", "Family function", "Doctor's appointment", "Travel", "Other"), optional details, a routing note ("Goes to Ms. Neha Arora, class teacher. Bus 7 is told not to wait. Homework for those days stays in the app."), a send button and a list of past requests.
- Functions: pick dates (To defaults to From; an end before the start shows "The end date is before the start date"); the day counter excludes Sundays ("Wed 21 Oct – Thu 22 Oct · 2 school days"); the button text steps through "Pick the dates" -> "Pick a reason" -> "Send for Navya · Wed 21 Oct – Thu 22 Oct".
- Interactions (tested): Send -> toast "Sent to Ms. Neha Arora", history row "With class teacher" (amber); after about 4 seconds the sample is approved: toast "Leave approved by Ms. Neha Arora", chip "Approved" (green). Earlier history: "Wed 30 Sep · Doctor's appointment · Approved".
- Rules: the request goes to the class teacher for approval; for a child on the bus the bus attendant is told not to wait; homework for leave days remains visible in the app. When the student applies from her own app, the parent confirms first (home task "Confirm").

PTM slot (Phone: pushed from Home tile "PTM slot" or the "Book" task)

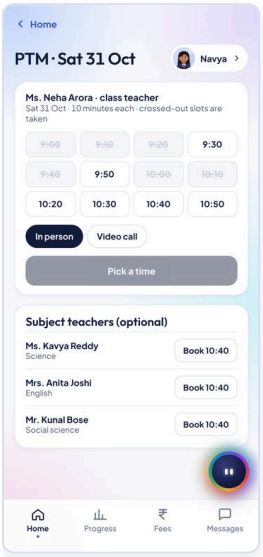

Phone · Ptm

- What it shows: "PTM · Sat 31 Oct", the class teacher ("Ms. Neha Arora · class teacher"), twelve 10–minute slots from 9:00 to 10:50 with taken slots crossed out, "In person | Video call" pills, then "Subject teachers (optional)".
- Functions: pick a free slot; the button changes from "Pick a time" to "Block 10:30 with Ms. Neha"; choose mode; for each subject teacher a "Book 10:40" button (a fixed follow-on slot).
- Interactions: Block -> toast "Slot blocked · reminder the evening before"; the card turns into "✓ Your slot is blocked · Sat 31 Oct · 10:30 · Ms. Neha Arora · Room 204" (or "video call (link in the app)"), with "Add to calendar" (toast "Added to your phone calendar") and "Release slot" (toast "Slot released"). A subject-teacher booking shows "Also booked: Ms. Kavya Reddy at 10:40 am".
- Rules: taken slots cannot be picked; one class-teacher slot per child; the "Book" home task disappears once booked.

Notices (Phone: pushed from Home tile "Notices")

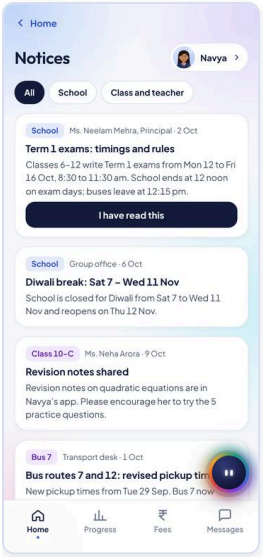

Phone · Notices

- What it shows: filter pills "All | School | Class and teacher" and a feed of notices for the selected child plus those for the whole family: e.g. "Term 1 exams: timings and rules" (principal, 2 Oct), "Diwali break: Sat 7 – Wed 11 Nov", "Revision notes shared" (Class 10–C, Ms. Arora), "Bus routes 7 and 12: revised pickup times" (Transport desk), "PTM on Saturday 31 Oct". Arjun also sees "Zoo trip on Thursday 22 Oct".
- Functions: "I have read this" on notices that require acknowledgement; "Give consent / No" on consent notices (zoo trip, ₹450, consent by Mon 19 Oct).
- Interactions: read -> toast "Confirmed · the school can see you read it"; consent yes -> "Consent given · ₹450 added to Arjun's fees" (the zoo fee appears on Fees); consent no -> "Noted · Mrs. Malhotra is told" and the text "You said no · Arjun stays in school that day".
- Rules: the Notices badge counts items awaiting a response; read receipts are visible to the school.

Bus 7 tracker (Phone: pushed from the bus line on Home; only for children on transport)

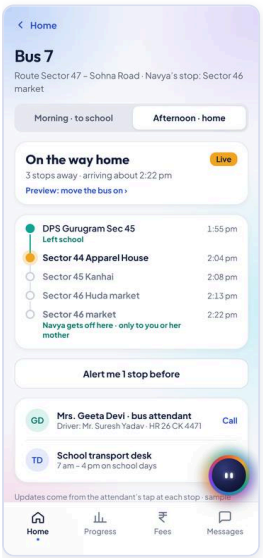

Phone · Bus pm

- What it shows: "Bus 7 · Route Sector 47 – Sohna Road · Navya's stop: Sector 46 market"; segmented switch "Morning · to school | Afternoon · home"; a status card; stop-by-stop timeline with times; attendant and transport desk contacts.
- Functions: Morning view shows "Reached school · Morning trip done · Bus 7 reached school at 7:40 am · on time" with "Boarded · tapped by Mrs. Geeta Devi · 7:21 am". Afternoon view shows "On the way home · Live", "3 stops away · arriving about 2:22 pm", a link "Preview: move the bus on ›" that advances the sample bus one stop, and "Navya gets off here · only to you or her mother". At the last stop it reads "Navya is home · Handed to you at Sector 46 market · 2:22 pm" and the stop note "Handed to Mr. Srinivas Reddy · code checked".
- "Alert me 1 stop before" toggles (toasts "We'll notify you when Bus 7 leaves Sector 46 market" / "Alert off"; button text becomes "You'll be alerted 1 stop before").

- Contacts: "Mrs. Geeta Devi · bus attendant, Driver: Mr. Suresh Yadav · HR 26 CK 4471" with "Call" (toast "Calling the bus attendant, Mrs. Geeta Devi (sample number)"); "School transport desk · 7 am – 4 pm on school days" with "Call" (toast "Calling the transport desk").
- Rules: updates come from the attendant's tap at each stop; handover at drop is to named people only (shown as a code check).

School calendar (Phone: pushed from "Calendar ›" on Home)

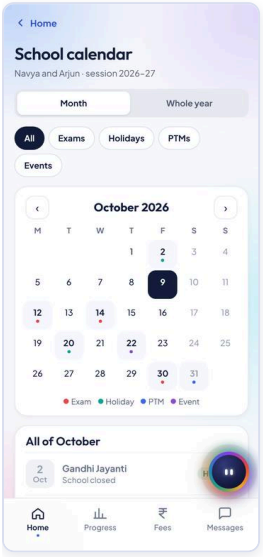

Phone · Calendar

- What it shows: "School calendar · Navya and Arjun · session 2026–27"; "Month | Whole year" switch; filter pills "All | Exams | Holidays | PTMs | Events"; month grid with coloured dots; a list for the month and, on tapping a date, that day's events. Whole-year view lists 12 months with event counts, "Session 2026–27 · 39 dates · tap a month", and a "Coming up" list.
- Functions: previous/next month arrows, tap a day or month; events are tagged Exam, Holiday, PTM, Event. Entries are per child where relevant ("Spelling test · Arjun", "Pre-board 1 · Navya", "CBSE board exams begin · Navya").

Junior pod (Phone: Home tile "Junior pod" for a child without a student login, e.g. Arjun, Class 2)

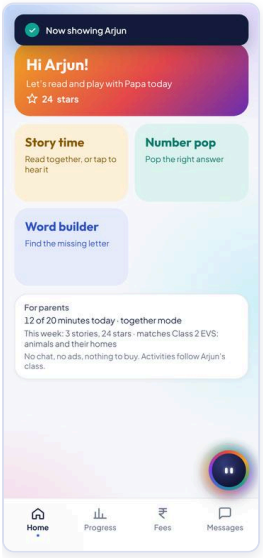

Phone · Junior pod

- What it shows: "Hi Arjun! Let's read and play with Papa today", a star count (24), three activity tiles "Story time", "Number pop", "Word builder", and a parent card: "12 of 20 minutes today · together mode", "This week: 3 stories, 24 stars · matches Class 2 EVS: animals and their homes", "No chat, no ads, nothing to buy. Activities follow Arjun's class."
- Functions: Story time (four-page story "The thirsty crow" with Back, Next and "Read it to me", toast "Reading aloud in English · tap again for Hindi"; finishing gives "Story finished · +3 stars for Arjun"); Number pop (pick the right answer: "Yay! +1 star" / "Try the next one!"); Word builder ("C _ T" with letter choices: "Super! +1 star" / "Almost! Look at the answer").
- Rules: a safe, parent-led play space with a 20-minute daily time budget, no chat and no purchases.

Kids switching and other profiles (Phone: child chip on any screen)

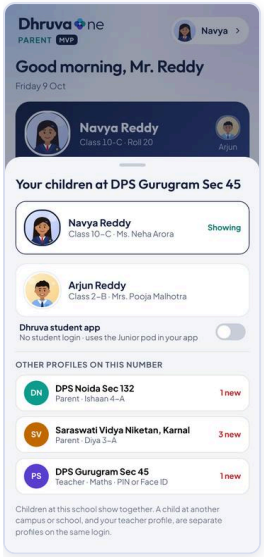

Phone · Kidsheet

- What it shows: sheet "Your children at DPS Gurugram Sec 45" listing Navya Reddy (Class 10–C · Ms. Neha Arora, "Showing") and Arjun Reddy (Class 2–B · Mrs. Pooja Malhotra); a toggle "Dhruva student app" (Arjun: "No student login · uses the Junior pod in your app"); "OTHER PROFILES ON THIS NUMBER": DPS Noida Sec 132 (Parent · Ishaan 4–A, "1 new"), Saraswati Vidya Niketan, Karnal (Parent · Diya 3–A, "3 new"), and DPS Gurugram Sec 45 (Teacher · Maths · PIN or Face ID, "1 new"); footnote "Children at this school show together. A child at another campus or school, and your teacher profile, are separate profiles on the same login."
- Functions and interactions: tap a child -> sheet closes, toast "Now showing Arjun", all screens re-scope. The "Dhruva student app" toggle creates or switches off a student login: toasts "Student login created for Arjun · details sent to you" / "Arjun's student login is switched off · the Junior pod is in your app". Tapping another profile: toast "Switching to DPS Noida Sec 132 · Parent. See the Profile switching board for the full flow." (the switch itself is designed on a separate board). A function "Add child" exists in the app logic: toast "Enter your child's admission number · the school office verifies it".

Dhruva chat (Phone: orb button on every screen)

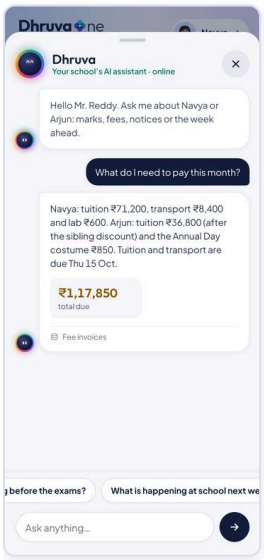

Phone · Dhruva chat

- What it shows: sheet "Dhruva · Your school's AI assistant · online", greeting "Hello Mr. Reddy. Ask me about Navya or Arjun: marks, fees, notices or the week ahead.", suggestion chips, and an "Ask anything…" box.
- Functions: three ready questions with answers and stat tiles and a source line: "How is Navya doing before the exams?" (84% unit test 3, 94% attendance, source "Marks and attendance"), "What do I need to pay this month?" (₹1,17,850 total due, source "Fee invoices"), "What is happening at school next week?" (Term 1 exams for Navya, spelling test for Arjun, results Fri 30 Oct, PTM Sat 31 Oct; source "School calendar and notices"). Typed words that match (for example "pay", "fee", "exam") get the same answers. Anything else returns "I answer questions about your children's school day, marks, fees and notices, from the school's records."
- Rules: while thinking the status reads "Checking your records…"; the answer always shows its source.

Tenant variants (Noida and Karnal)

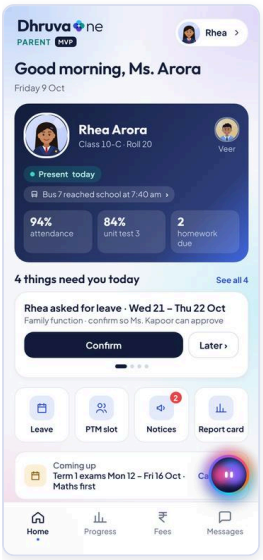

Phone · MR ParentNoida home

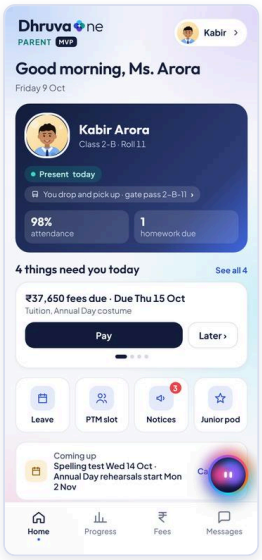

Phone · MR ParentKarnal home

Noida parent variant and Karnal parent variant are the same app populated for other tenants (screenshots,). Noida: "Good morning, Ms. Arora", Rhea Arora (Class 10–C) with sibling Veer, class teacher Ms. Kapoor. Karnal (standalone school): Ms. Arora with Kabir Arora (Class 2–B, "You drop and pick up · gate pass 2–B-11") and sibling Ria; fees "₹37,650 due for Kabir" with "Ria also has ₹80,200 due"; class teacher Mrs. Sunita Verma. Screens, tabs and rules are identical, which shows one product serving a group campus and a standalone school with only data changing.

Older boards (context only)

earlier parent design (Oct 7, five tabs Home, Progress, Pay, Bus, Talk, one child "Vivaan, Class 5–B") had features not in the current app, notably "Pay in 3 parts" for overdue tuition, an in-app picnic consent tied to a fee, and a "How Vivaan is doing" learning summary. earlier parent design is a children's corner (stories, games, stickers, "Finish a mission to grow a flower"); its ideas live on as the Junior pod. Neither is used by the current Final board.

Gaps / differences between desktop and phone

- There is no parent desktop board; the parent experience is phone only (plus the separate WhatsApp parent channel, covered elsewhere).
- Not shown in the design: push-notification settings, language switch (only "Read it to me" English or Hindi in the pod), downloadable fee statement for the year, real payment gateway screens, offline behaviour, adding a child beyond a toast.

FAMILIES AND STUDENTS · DESKTOP · PHONE

Student, Classes 6 to 8

A friendly, game-flavoured study companion: three small "quests" a day built from the teachers' own homework and notes, with XP, house points and badges, plus a hint-first way to ask a teacher.

Who uses it. Middle-school students (Classes 6–8), sample: Myra Kapoor, Class 7–B, Roll 18, Raman house, class teacher Ms. Pallavi Shah, parent Mrs. Ritu Kapoor, at DPS Gurugram Sec 45.

On the following pages:

- Home (Desktop: Home · Phone: Home tab)
- Schedule / Timetable (Desktop: Timetable · Phone: Schedule tab)
- Homework (Desktop: Homework (red count) · Phone: Learn tab > Homework)
- Notes and revision (Desktop: Notes & revision · Phone: Learn tab > Notes)
- Ask a teacher (Desktop: Ask a teacher · Phone: Learn tab > Ask)
- Marks (Desktop: Marks · Phone: Progress tab > Marks)
- Attendance (Desktop: Attendance · Phone: Progress tab > Attendance)
- Holistic progress (Desktop: Holistic progress · Phone: Progress tab > Holistic)
- Leave (Desktop: Leave · Phone: tap the "MK" avatar on Home to open the profile screen "Apply for leave")

Business summary

For Classes 6–8 the school wants children to do the teacher's homework, read the notes and ask questions, not to be entertained for its own sake. The app turns that routine into three daily quests chosen by Dhruva from what teachers actually set, and rewards finishing them with XP, house points (every 10 XP gives one point to the child's house) and badges. The child submits homework by photo, file or typing, reads teacher notes, practises, checks marks and attendance, and asks teachers questions with Dhruva giving a hint first so the child tries before asking. Marks and the holistic (CBSE-style) progress card are visible to the child and parents only. For the school this means higher homework hand-in, fewer routine doubts reaching teachers, and a visible link between habits and house spirit. Leave is applied for by the child but confirmed by the parent first, which keeps adults in control.

Daily story (what Dhruva surfaces first)

Friday 9 Oct, "Hi Myra!", "3 quests and a warm-up quiz today". Home leads with a level card ("Level 7 · Explorer", "260 XP to Level 8 · Navigator", "12–day streak", "1,240 / 1,500 XP"). Then one card at a time: "3 THINGS NEED YOU · 1 OF 3": first the Maths homework ("Revision worksheet: integers and fractions (12 questions) · Due Sat 10 Oct · 2 to hand in", button "Start homework"); "Later ›" moves to quest 2, "Finish your Maths revision worksheet" (+30 XP, button "Start"), then quest 3, "Science warm-up quiz: 5 questions" (+50 XP). When all are done the card reads "All 3 quests done · streak saved! Come back tomorrow for new ones." Under the card sit the "Brain boost · Science" warm-up (five questions, +10 XP each), then the Term 1 subject cards, house standing and badges. On desktop the same ideas are laid out in two columns.

Screens

Home (Desktop: Home · Phone: Home tab)

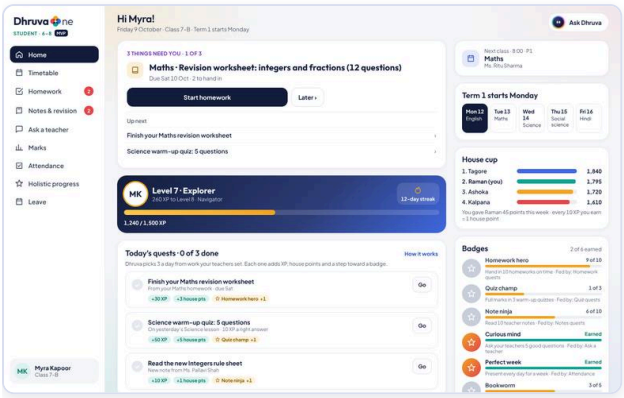

Desktop · Home

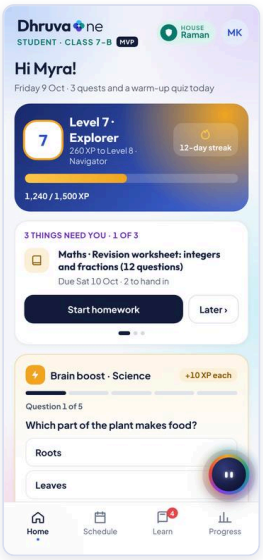

Phone · Home

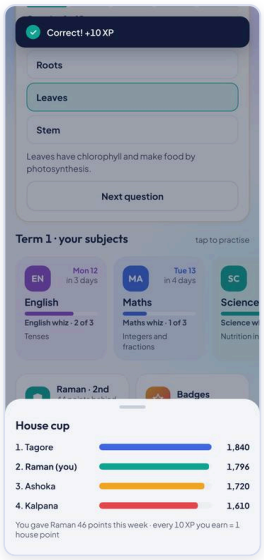

Phone · House cup

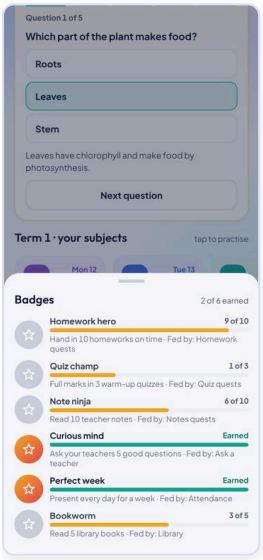

Phone · Badges

- What it shows (phone): header with "HOUSE Raman" chip and avatar "MK"; greeting; level and XP card with streak; focus task card; "Brain boost" quiz; "Term 1 · your subjects" horizontal cards (English "Mon 12 · in 3 days", Maths "Tue 13", Science "Wed 14", Social science "Thu 15", Hindi "Fri 16") each with a whiz-badge progress line ("English whiz · 2 of 3") and the next topic ("Tenses", "Integers and fractions", "Nutrition in plants", "Our environment", "Kahani lekhan"); two tiles "Raman · 2nd · 45 points behind Tagore" and "Badges · 2 of 6 earned".
- What it shows (desktop): greeting with an "Ask Dhruva" button; focus card plus an "Up next" list; level card; "Today's quests · 0 of 3 done" with a "How it works" link and three quest rows; "Exam warm-up · Science" quiz; right column: "Next class · 8:00 · P1 Maths Ms. Ritu Sharma", "Term 1 starts Monday" date-sheet chips (Mon 12 English … Fri 16 Hindi), "House cup" bars and "Badges" list.
- Functions:
- Focus card: "Start homework" opens the homework detail for that item; "Start" on a quest runs the quest's action (homework sheet, notes sheet, or a pointer to the quiz); "Later ›" cycles to the next quest; progress dots; on desktop a list "Up next" lets you jump to any other quest.
- Quests (desktop list): each shows the quest title, source line, "+30 XP", "+3 house pts", the badge it feeds ("Homework hero +1"), and a "Go" button; completed quests turn green with a tick. Quests: "Finish your Maths revision worksheet" (+30 XP, from Maths homework), "Science warm-up quiz: 5 questions" (+50 XP, "On yesterday's Science lesson · 10 XP a right answer"), "Read the new Integers rule sheet" (+10 XP, "New note from Ms. Pallavi Shah"). "How it works" explains: "Dhruva picks 3 a day from work your teachers set. Each one adds XP, house points and a step toward a badge."
- Brain boost / Exam warm-up quiz: five Science questions, three choices each ("Which part of the plant makes food?" Roots, Leaves, Stem). After an answer the correct option turns green and a one-line reason shows ("Leaves have chlorophyll and make

food by photosynthesis."); "Next question" moves on, last button "See my score". Summary: "Full marks! 5 of 5" with "+50 XP · Quiz champ +1" or "N of 5 right" with "get all 5 for Quiz champ"; "Try again" gives "New round · practice only, no extra points".

- Subject card (phone): opens a bottom sheet "Exam Tue 13 · in 4 days · Maths · Maths whiz badge · 1 of 3 · Getting there" with "PRACTISE THIS NEXT: Integers and fractions", "Get 4 or more right in the game to fill one step of the whiz badge.", and two buttons: "Play a 5-question game" and "See a 1-page summary". Whiz states: "Just starting", "Getting there", "Nearly there", "Badge earned!".
- Subject game (phone): "Maths pop": five rounds, four colourful bubbles, "Tap the right bubble"; a right answer gives "Pop! +10 XP", a wrong one "Oops · the right one is green"; end screen "Perfect round!" / "Great round!" / "Good try!" with "N of 5 right · +N0 XP" and "Maths whiz badge · one step closer" (4 or more right moves the badge) or "Get 4 or more right to move your Maths whiz badge"; buttons to play again or go home. Games exist for English, Maths, Science, Social science and Hindi (for example Maths: "(−6) × (−4) = ?", English: "Pick the past tense of "go"", Hindi: ""पानी" means").
- "Raman · 2nd" tile opens "House cup": "1. Tagore 1,840 · 2. Raman (you) 1,795 · 3. Ashoka 1,720 · 4. Kalpana 1,610" and "You gave Raman 45 points this week · every 10 XP you earn = 1 house point".
- "Badges" tile opens six badges, each with progress and the quests that feed it: Homework hero 9 of 10 ("Hand in 10 homeworks on time"), Quiz champ 1 of 3, Note ninja 6 of 10, Curious mind (earned, "Ask your teachers 5 good questions"), Perfect week (earned, attendance), Bookworm 3 of 5 (library).
- Avatar "MK" (phone) opens the profile screen with leave (see Leave).
- Interactions: correct quiz answer toast "Correct! +10 XP", wrong "Not quite · see why below"; XP bar, "to next level" text and house points update live; doing a quest moves the badge counts (for example finishing the worksheet moves Homework hero to 10 of 10 and earns it). Level 8 "Navigator" at 1,500 XP.
- Dhruva (assistant) help: the orb ("Your study buddy · online" on phone; "Ask Dhruva" button and a side panel "Answers from your records, with sources" on desktop) answers two prepared questions: "What should I revise first?" (phone: "English is first on Monday: read the tenses sheet tonight, then Maths word problems.", stat "3 days to go"; desktop: "Start with Maths word problems: they cost you marks in Unit test 3. Then Science: Nutrition in plants. English comes first on Monday…" with "3 days to exams, 97% attendance", source "Your marks, date sheet and homework") and "What homework is due?" ("Two pieces, both due Saturday."). Anything else: "I help you plan revision and give hints. I won't do your homework for you, but I'll help you get there."
- Rules & edge cases: Dhruva chooses quests only from teacher-set work, quiz and notes; the "I won't do your homework" rule is stated in the fallback answer; XP is only awarded on first correct answers (a retry round gives no extra points).

Schedule / Timetable (Desktop: Timetable · Phone: Schedule tab)

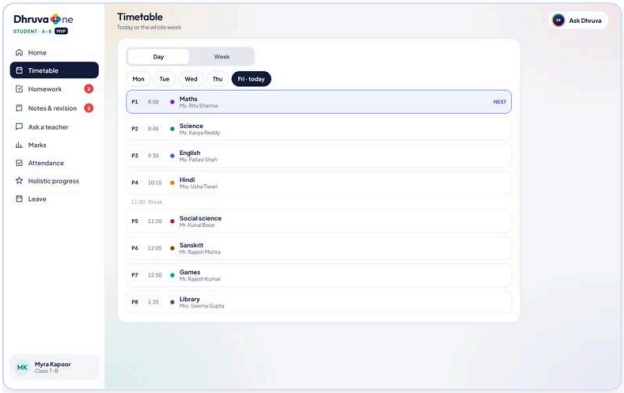

Desktop · Timetable

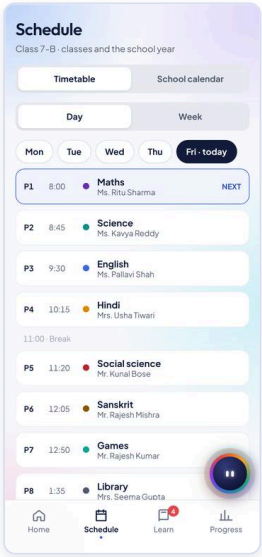

Phone · Schedule

- What it shows: "Class 7-B · classes and the school year". Phone has a top switch "Timetable | School calendar"; desktop has the timetable only.
- Functions (timetable): "Day | Week" switch. Day view: weekday pills "Mon … Fri · today" and eight periods (P1 8:00 Maths Ms. Ritu Sharma "NEXT", P2 8:45 Science, P3 9:30 English, P4 10:15 Hindi, "11:00 · Break", P5 11:20 Social science, P6 12:05 Sanskrit, P7 12:50 Games, P8 1:35 Library) each with a coloured subject dot and the teacher's name. Week view: Monday-Friday by P1–P8 grid with colour-coded subject codes (EN, MA, SC, HI, SS, SA, CO, AR, PE, LI, MU) and a legend.
- Functions (phone School calendar): "Month | Whole year" switch, filter pills "All | Exams | Holidays | Events | PTMs", month grid with coloured dots, tap a date for its events, whole-year grid of months with counts ("Session 2026–27 · N dates"). Sample October entries: Gandhi Jayanti (school closed), Term 1 exams begin (Classes 6–12 · till Fri 16 Oct), Dussehra, Term 1 results (Report cards in the app), PTM · Term 1 (Sat 31 Oct).
- Interactions: day pills change the list; the "NEXT" tag marks the next class (on today's view only).

- Rules: the timetable is the class's own timetable; the date sheet appears on Home as "Term 1 · your subjects" (phone) or the date chips (desktop).

Homework (Desktop: Homework (red count) · Phone: Learn tab > Homework)

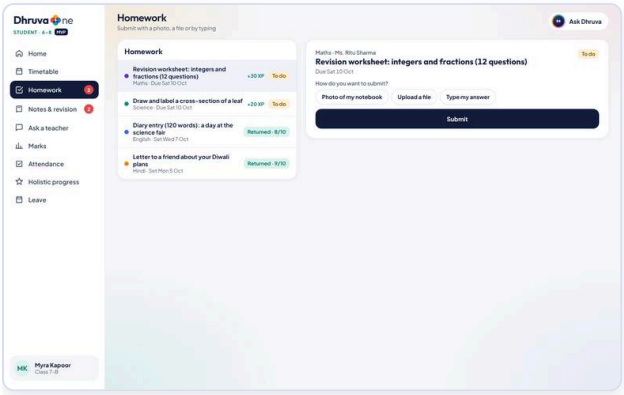

Desktop · Homework

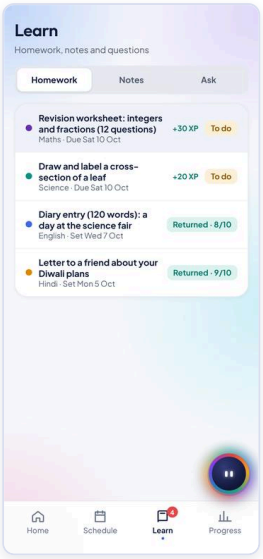

Phone · Learn

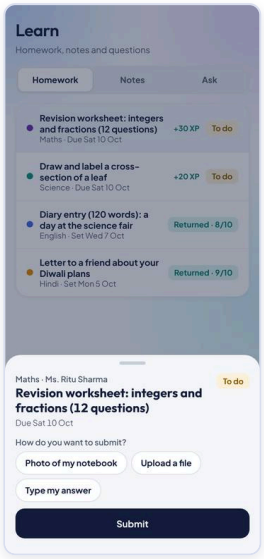

Phone · Homework sheet

- What it shows: list of homework with subject, due or set date, and a status chip: "To do" (with "+30 XP"), "Submitted", or "Returned · 8/10". Samples: Maths revision worksheet (+30 XP, due Sat 10 Oct), Science "Draw and label a cross-section of a leaf" (+20 XP), English diary entry "Returned · 8/10", Hindi letter "Returned · 9/10". The tab bar shows a badge ("Learn 4") counting homework to do plus new notes.
- Functions: tap an item to open its detail (sheet on phone, panel on desktop): teacher name, due date, status. For "To do": "How do you want to submit?" with three choices "Photo of my notebook" (shows "3 photos added · pages look clear"), "Upload a file" (shows "Revision_sheet_Myra.pdf added"), "Type my answer" (shows "Answer typed (you can edit before sending)"), then "Submit". For "Returned": marks and the teacher's feedback (for example "Lovely details about the volcano model! Watch your past tense: “we goes” → “we went”.").
- Interactions: Submit without choosing: toast "Pick how you want to submit". Submit with a choice: toast "Submitted on time · +30 XP", the chip becomes "Submitted", the badge count drops, the quest and Homework-hero progress move.
- Dhruva help: "Start homework" from Home lands here; the Ask tab gives hints.
- Rules: the toast says "Submitted on time"; no late-submission rule is shown in the design.

Notes and revision (Desktop: Notes & revision · Phone: Learn tab > Notes)

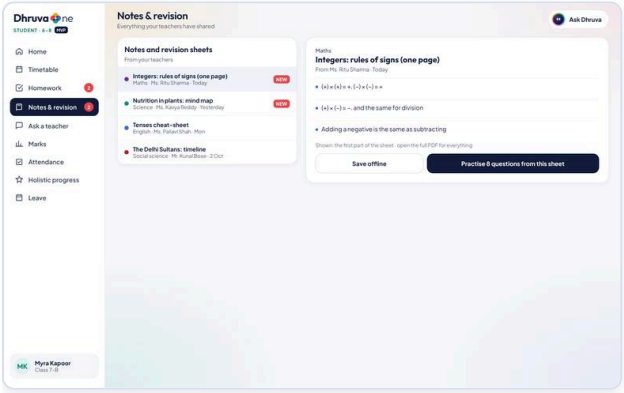

Desktop · Notes revision

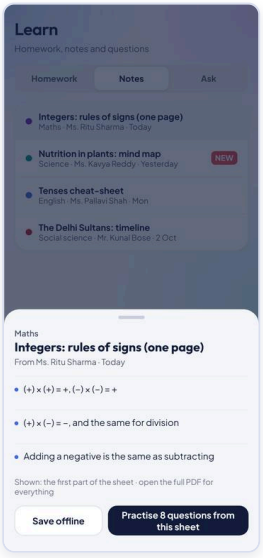

Phone · Note open

- What it shows: notes shared by teachers, each with subject, teacher, date and a "NEW" tag: "Integers: rules of signs (one page)" (Maths, Ms. Ritu Sharma, Today), "Nutrition in plants: mind map" (Science), "Tenses cheat-sheet" (English), "The Delhi Sultans: timeline" (Social science).

- Functions: opening a note shows key points (for example " × = +, (−) × (−) = +") with the line "Shown: the first part of the sheet · open the full PDF for everything", plus "Save offline" and "Practise 8 questions from this sheet".
- Interactions: opening marks the note read (NEW disappears, badge count drops). "Save offline" toast "Saved for offline reading". "Practise 8 questions" toast "Practice opened · Dhruva marks it and shows the steps you missed".
- Rules: reading a new note counts toward the Note-ninja badge.

Ask a teacher (Desktop: Ask a teacher · Phone: Learn tab > Ask)

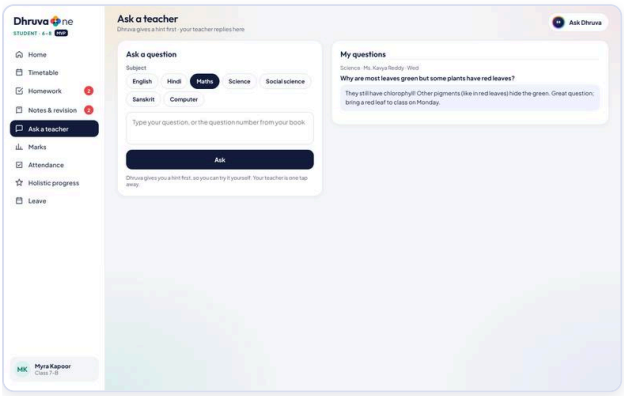

Desktop · Ask a teacher

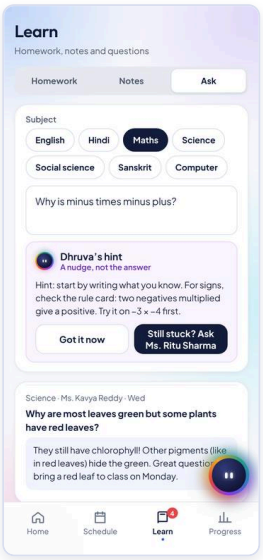

Phone · Ask hint

- What it shows: "Ask a question": subject pills (English, Hindi, Maths, Science, Social science, Sanskrit, Computer), a question box ("Type your question, or the question number from your book"), "Ask", the note "Dhruva gives you a hint first, so you can try it yourself. Your teacher is one tap away." and "My questions" with earlier threads (Science · Ms. Kavya Reddy · Wed: "Why are most leaves green but some plants have red leaves?" with the teacher's answer).
- Functions and interactions (tested): choose subject, type, tap "Ask" -> a card "Dhruva's hint · A nudge, not the answer" with a subject-specific hint (Maths: "Hint: start by writing what you know. For signs, check the rule card: two negatives multiplied give a positive. Try it on −3 × −4 first."). Two buttons: "Got it now" (toast "Great! +5 XP for working it out", clears the form) or "Still stuck? Ask Ms. Ritu Sharma" (toast "Sent to Ms. Ritu Sharma · you'll get a reply here"; a thread appears marked waiting, and about 4 seconds later a sample teacher reply appears: "Good question. Look at the worked example on page 2 of the revision sheet, then try it again. We'll go over it in class too."). Empty question: toast "Type your question first".
- Rules: teacher routing is by the chosen subject; teacher sees the question only after the child says the hint was not enough; "Curious mind" badge counts good questions.

Marks (Desktop: Marks · Phone: Progress tab > Marks)

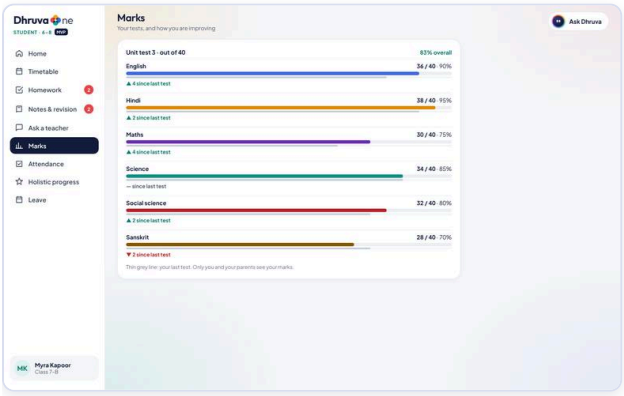

Desktop · Marks

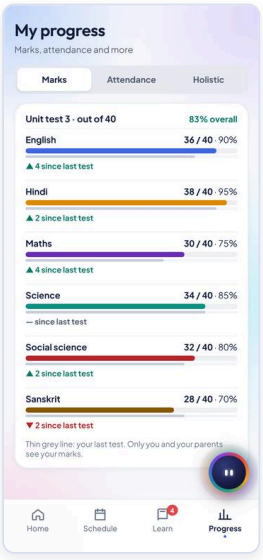

Phone · Progress

- What it shows: "Unit test 3 · out of 40 · 83% overall"; per-subject coloured bar with a thin grey line for the last test: English 36/40 · 90% "▲ 4 since last test", Hindi 38/40 · 95% "▲ 2", Maths 30/40 · 75% "▲ 4", Science 34/40 · 85% "— since last test", Social science 32/40 · 80% "▲ 2", Sanskrit 28/40 · 70% "▼ 2". Footnote: "Thin grey line: your last test. Only you and your parents see your marks."
- Functions: read-only. Rules: shows change versus the previous test; privacy footnote.

Attendance (Desktop: Attendance · Phone: Progress tab > Attendance)

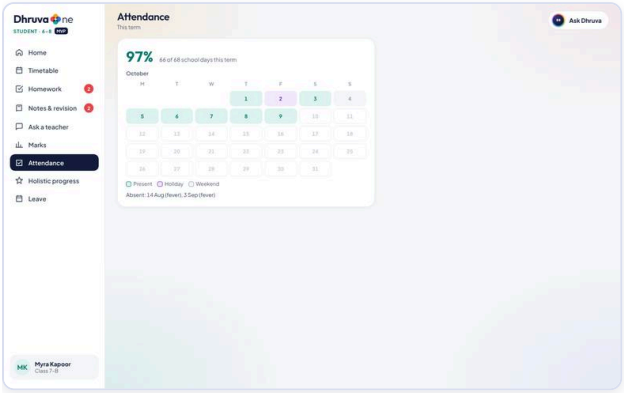

Desktop · Attendance

- What it shows: "97% · 66 of 68 school days this term", October calendar with Present, Holiday and Weekend colours, and "Absent: 14 Aug (fever), 3 Sep (fever)".
- Functions: read-only (leave is applied for from the Leave area).

Holistic progress (Desktop: Holistic progress · Phone: Progress tab > Holistic)

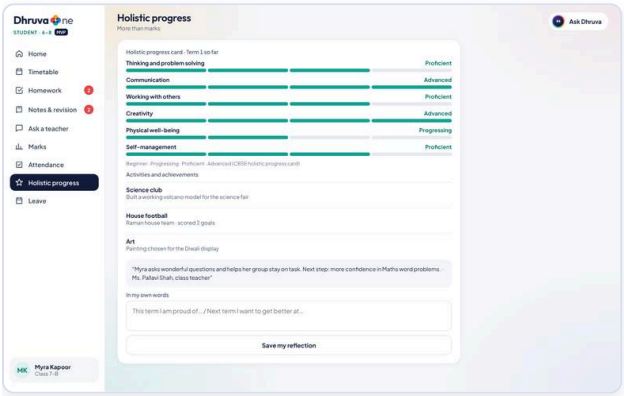

Desktop · Holistic progress

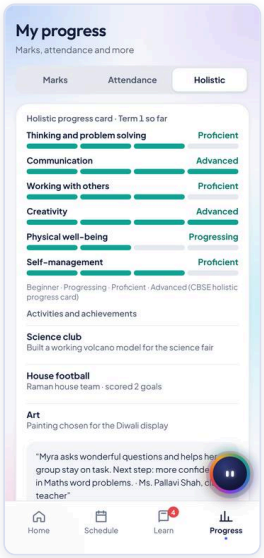

Phone · Holistic

- What it shows: "Holistic progress card · Term 1 so far": six domains with a four-step level bar (Thinking and problem solving Proficient, Communication Advanced, Working with others Proficient, Creativity Advanced, Physical well-being Progressing, Self-management Proficient), legend "Beginner · Progressing · Proficient · Advanced (CBSE holistic progress card)"; "Activities and achievements" (Science club, House football, Art); teacher remark; "In my own words" reflection box with prompt "This term I am proud of… / Next term I want to get better at…" and "Save my reflection".
- Interactions: Save -> toast "Saved · your class teacher sees it on your progress card".
- Rules: the reflection becomes visible to the class teacher.

Leave (Desktop: Leave · Phone: tap the "MK" avatar on Home to open the profile screen "Apply for leave")

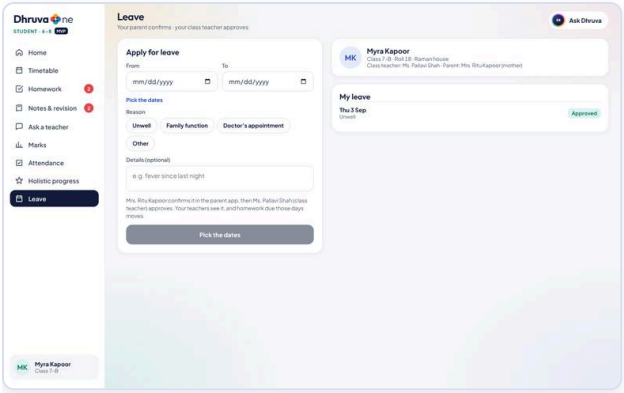

Desktop · Leave

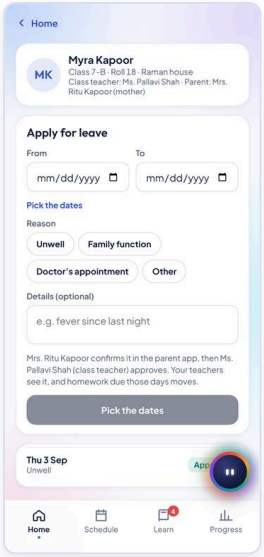

Phone · Me leave

- What it shows: profile ("Myra Kapoor · Class 7–B · Roll 18 · Raman house · Class teacher: Ms. Pallavi Shah · Parent: Mrs. Ritu Kapoor (mother)"), "Apply for leave" with From, To, reason pills ("Unwell", "Family function", "Doctor's appointment", "Other"), optional details, route note "Mrs. Ritu Kapoor confirms it in the parent app, then Ms. Pallavi Shah (class teacher) approves. Your teachers see it, and homework due those days moves.", and "My leave" history (Thu 3 Sep · Unwell · Approved).
- Interactions: button steps "Pick the dates" -> "Pick a reason" -> "Send · Wed 21 Oct – Thu 22 Oct". Send -> toast "Sent to Mrs. Ritu Kapoor to confirm", history row "Parent confirmed · with class teacher"; then toast "Leave approved by Ms. Pallavi Shah" and "Approved". End before start shows "The end date is before the start date". Sundays are not counted.
- Rules: two-step approval (parent confirms in the Parent app, class teacher approves).

Gaps / differences between desktop and phone

- Phone only: School calendar (inside Schedule), subject cards with whiz-badge progress, subject sheet, "Maths pop" style subject games, house-cup and badges as sheets, profile screen opened from the avatar.
- Desktop only: dedicated sidebar entries for Homework, Notes & revision, Ask a teacher, Marks, Attendance, Holistic progress and Leave as separate pages (on phone these are grouped into Learn and Progress); "Up next" list; quests as a full list with a "Go" button on every row and "How it works"; Dhruva side panel (via "Ask Dhruva") with a two-question starter; the date-sheet chips are static (not tappable).
- Desktop Dhruva reply to "What should I revise first?" differs in content from the phone reply (Maths first on desktop; English first on phone). Both are sample text.
- Desktop Home does not show the subject game or "whiz" cards.

FAMILIES AND STUDENTS · DESKTOP · PHONE

Student, Classes 9 to 12

An exam-focused, no-frills study planner: Dhruva reads her marks and date sheet and builds today's study plan, shows how ready she is for each exam, and answers doubts with hints before the teacher.

Who uses it. Senior-school students (Classes 9–12), sample: Navya Reddy, Class 10–C, Roll 20, Tagore house, class teacher Ms. Neha Arora, parent Mr. Srinivas Reddy (father), DPS Gurugram Sec 45. (She is the same Navya whom her father follows in the Parent app.)

On the following pages:

- Home (Desktop: Home · Phone: Home tab)
- Timed past-paper practice (Phone: board screen exists; not linked from a visible button in the current design)
- Schedule / Timetable (Desktop: Timetable · Phone: Schedule tab)
- Homework (Desktop: Homework · Phone: Learn tab > Homework)
- Notes and revision (Desktop: Notes & revision · Phone: Learn tab > Notes)
- Ask a teacher (Desktop: Ask a teacher · Phone: Learn tab > Ask)
- Marks (Desktop: Marks · Phone: Progress tab > Marks)
- Attendance (Desktop: Attendance · Phone: Progress tab > Attendance)
- Holistic progress (Desktop: Holistic progress · Phone: Progress tab > Holistic)
- Leave (Desktop: Leave · Phone: tap the "NR" avatar on Home)

Business summary

For Classes 9–12 the school wants marks to improve and board anxiety to fall, without turning learning into a game. The senior app drops XP and levels in favour of "study points", a readiness score per exam, a short daily study plan made by Dhruva from the student's own weak spots, and a hint-first way of asking teachers. Teachers' homework, revision notes and doubts live in one place, and marks, attendance and the holistic card (co-scholastic grades, life skills, career interest) are visible only to the student and parents. House points still exist, so house spirit continues, but the emphasis is "3 days to Term 1, 77% ready". For the school this reduces last-week panic, gives the class teacher and counsellor a visible signal of where each child is weak, and keeps parents and students looking at the same numbers.

Daily story (what Dhruva surfaces first)

Friday 9 Oct, "Hi Navya!", "exam mode is on". Home opens with a dark Exam Mode card: "3 days to Term 1", "Maths first · Mon 12 Oct, 8:30 am · Hall B, seat 14", a ring "77% ready" with a "How? ⓘ" link, "9-day streak" and "2,150 pts". Below, one card at a time: "3 THINGS NEED YOU · 1 OF 3". First the homework ("Maths · Revision sheet: quadratic word problems (8 questions) · Due Sat 10 Oct · 2 to hand in", "Start homework"). "Later ›" moves on to the study-plan tasks ("Maths · quadratic word problems", "Maths · 10 past board questions (timed)"), each with "Mark as done". Then a "Brain boost · Maths" quick question set, "Your subjects" cards with a readiness ring per exam (Maths 70% Mon 12, Science 78%, English 87%, Social science 67%, Hindi 83%), and tiles "Tagore · 1st · 45 points ahead" and "Achievements · 3 of 6 earned". On desktop the plan, readiness bars and "Work on these" list are all visible at once.

Screens

Home (Desktop: Home · Phone: Home tab)

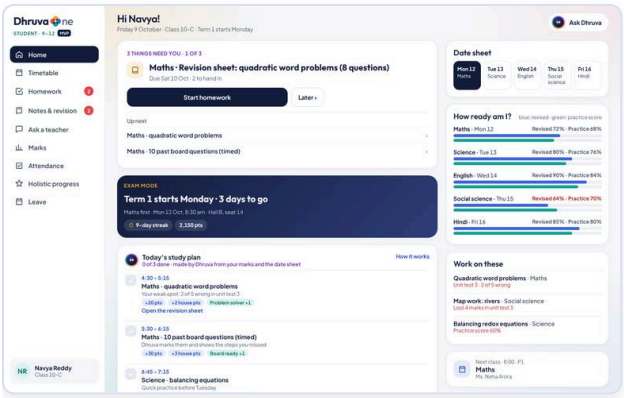

Desktop · Home

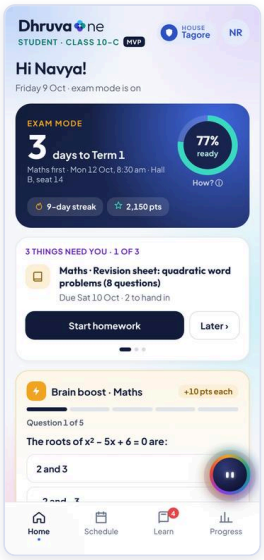

Phone · Home

Phone · Readiness how

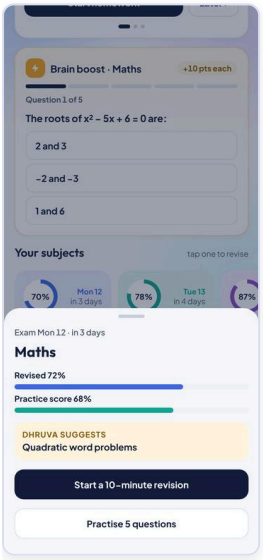

Phone · Subject sheet

- What it shows (phone): header "HOUSE Tagore" chip and avatar "NR"; Exam Mode card with countdown, first-paper line, readiness ring and streak and points; focus card; "Brain boost" quiz; "Your subjects · tap one to revise"; house tile and achievements tile.
- What it shows (desktop): greeting with "Ask Dhruva"; focus card with an "Up next" list; dark "EXAM MODE · Term 1 starts Monday · 3 days to go" banner with streak and points; "Today's study plan · 0 of 3 done · made by Dhruva from your marks and the date sheet" with a "How it works" link; "Quick practice · Maths · from past board papers" (five questions); right column: "Date sheet" chips (Mon 12 Maths, Tue 13 Science, Wed 14 English, Thu 15 Social science, Fri 16 Hindi), "How ready am I?" (two bars per subject: blue "revised", green "practice score", for example "Maths · Mon 12 · Revised 72% · Practice 68%"), "Work on these" (three weak spots with the evidence), and "Next class · 8:00 · P1 Maths Ms. Neha Arora".
- Functions:
- Focus card: "Start homework" opens the homework detail; for study-plan tasks the button is "Mark as done" (toast "Nice work · +20 study points"); "Later ›" cycles; dots show position.
- Readiness ring and "How? ⓘ" (phone) open a sheet "How your 77% is worked out": "For each subject, Dhruva averages two numbers: Revised, the share of Term 1 topics you have studied and ticked off, and Practice, your average score in practice sets and class tests over the last 30 days. Your overall readiness is the average of all five subjects." with a table of Revised / Practice / Ready per subject and the tip "Fastest way up: Social science · Map work: rivers. One 30–minute revision there adds about 2% to your overall." Button "Got it".
- Study plan (desktop list): three timed items with tick boxes: "4:30 – 5:15 Maths · quadratic word problems (Your weak spot: 2 of 5 wrong in unit test 3) +20 pts +2 house pts · Problem solver +1 · Open the revision sheet"; "5:30 – 6:15 Maths · 10 past board questions (timed) (Dhruva marks them and shows the steps you missed) +30 pts +3 house pts · Board ready +1"; "6:45 – 7:15

Science · balancing equations (Quick practice before Tuesday) +20 pts +2 house pts · Problem solver +1 · Open the revision sheet". "Open the revision sheet" jumps to the linked teacher note on Notes and revision.

- Brain boost / Quick practice quiz: five questions with three options (for example "The roots of $x^2 - 5x + 6 = 0$ are: 2 and 3 / −2 and −3 / 1 and 6"); reason shown after answering; "Next question"; score summary "Full marks! 5 of 5 · +50 study points" or "N of 5 right".
- Subject card (phone): opens a sheet "Exam Mon 12 · in 3 days · Maths · Revised 72% · Practice score 68%" with two bars and "DHRUVA SUGGESTS: Quadratic word problems" and buttons "Start a 10–minute revision" (toast "Dhruva made a 10–minute revision on Quadratic word problems · +20 points when done") and "Practise 5 questions" (toast "5 practice questions ready · Maths"). Each card also names the weak topic ("Quadratic word problems", "Balancing redox equations", "On track · keep reading", "Map work: rivers", "On track · one letter-writing drill").
- "Tagore · 1st · 45 points ahead" opens the house cup (Tagore 1,840, Raman 1,795, Ashoka 1,720, Kalpana 1,610; "You gave Tagore 38 points this week · every 10 study points = 1 house point").
- "Achievements" opens six achievements with progress and what feeds each: Board ready 2 of 5 ("Finish 5 timed past papers"), Problem solver 14 of 20, Steady scholar 9 of 14 ("Study 14 days in a row"), Doubt clearer (earned), Full month (earned, attendance), Top 10% (earned, "Top 10% of class in a unit test"). Phone header shows "3 of 6 earned".
- Avatar "NR" (phone) opens the profile with leave (see Leave).
- Interactions: ticking a study task adds its points (+20, +30, +20), adds house points (10 points = 1) and moves achievements (finishing both Maths-and-Science practice items moves Problem solver; the timed paper moves Board ready). When all three are done: "Plan done for today · +70 points earned. Take a break!". Readiness for Maths updates once a timed paper is scored.
- Dhruva (assistant) help: the whole study plan is Dhruva's. The orb (phone "Your study buddy · online"; desktop "Ask Dhruva" panel "Answers from your records, with sources") answers "What should I revise first?" (desktop: "Maths is first on Monday and it is your weakest revised subject (72%). Do quadratic word problems tonight, then 10 timed past board questions. Social science map work is next on the list." with "3 days to exams, 94% attendance"; phone: "Maths is first on Monday: quadratic word problems, then 10 timed past board questions.") and "What homework is due?" ("Two pieces, both due Saturday.").
- Rules & edge cases: readiness is the mean of Revised and Practice per subject, then the mean across five subjects; the plan is derived from marks (weak spots shown under "Work on these": Quadratic word problems · Maths "Unit test 3 · 2 of 5 wrong", Map work: rivers · Social science "Lost 4 marks in unit test 3", Balancing redox equations · Science "Practice score 60%"); exam seat information (Hall B, seat 14) is displayed on the first-paper line.

Timed past-paper practice (Phone: board screen exists; not linked from a visible button in the current design)

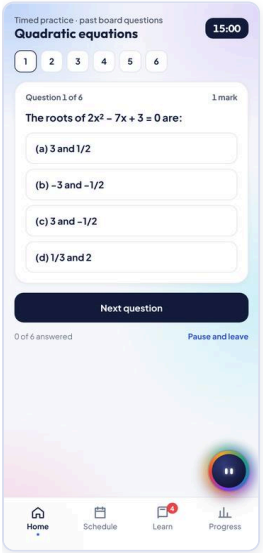

Phone · Timed paper

- What it shows: "Timed practice · past board questions · Quadratic equations", a 15:00 countdown (turns red under two minutes), question number buttons 1 to 6, "Question 1 of 6 · 1 mark", options (a)-(d), "Next question" / "‹ Back", "0 of 6 answered", "Pause and leave".
- Functions: six questions with marks (four 1–mark, one 3–mark word problem about a train, one 2–mark); the last question shows "Submit · Dhruva marks it". Result screen: score ring "N / 6", percentage, "Finished in m:ss of 15:00", "+30 study points · Board ready +1", a per-question review (your answer, correct answer, worked solution such as "$2x^2 - 7x + 3 = (2x - 1)(x - 3)$, so $x = 1/2$ or $x = 3$."), "Back to home" and "Try new questions" (toast "Dhruva made 6 new questions on the ones you missed"). "Pause and leave": toast "Practice paused · your answers are saved". Time up submits automatically.
- Note: the study-plan item "Maths · 10 past board questions (timed)" is the intended entry, but in the board as built its button is "Mark as done"; the paper screen is reached only in the prototype logic. We screenshot it by opening it directly; treat the link as design intent.

Schedule / Timetable (Desktop: Timetable · Phone: Schedule tab)

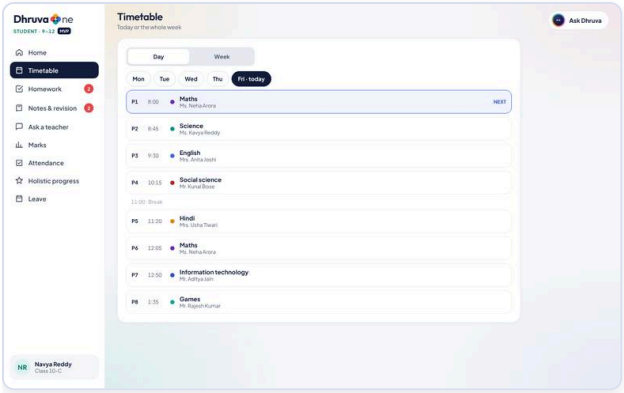

Desktop · Timetable

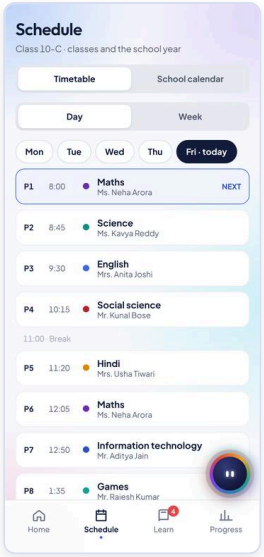

Phone · Schedule

- What it shows: "Class 10–C · classes and the school year". Phone has "Timetable | School calendar"; desktop has the timetable only.
- Functions: "Day | Week"; weekday pills with "Fri · today"; periods P1 8:00 Maths Ms. Neha Arora "NEXT", P2 8:45 Science Ms. Kavya Reddy, P3 9:30 English Mrs. Anita Joshi, P4 10:15 Social science Mr. Kunal Bose, "11:00 · Break", P5 11:20 Hindi Mrs. Usha Tiwari, P6 12:05 Maths, P7 12:50 Information technology Mr. Aditya Jain, P8 1:35 Games Mr. Rajesh Kumar. Week grid with subject codes.
- Phone school calendar: month and whole-year views with filters All/Exams/Holidays/Events/PTMs, class-10 specific entries such as "Career talk · choosing streams" (Class 10 · auditorium 11 am), "Inter-house debate final · Tagore vs Ashoka · 2 pm", "Pre-board 1 · Class 10 · 7–15 Dec", "Science practical exams · Class 10 · 12–16 Jan", "Pre-board 2", "CBSE board exams begin · Class 10 · date sheet in the app".

Homework (Desktop: Homework · Phone: Learn tab > Homework)

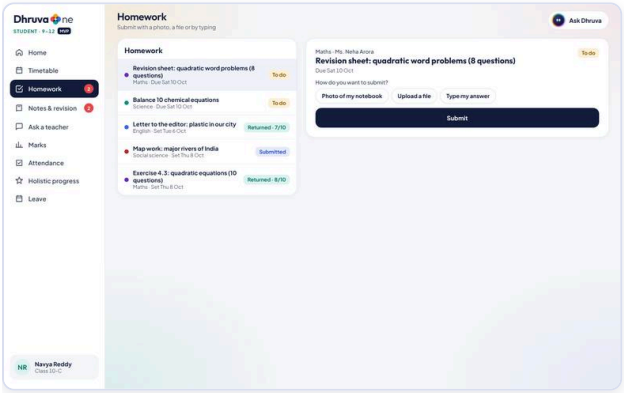

Desktop · Homework

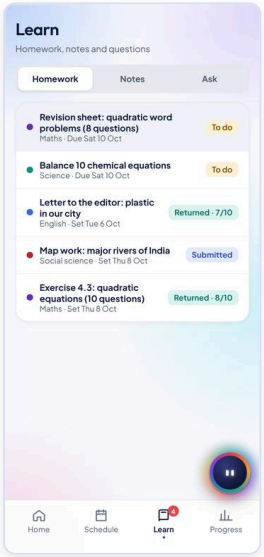

Phone · Learn

- What it shows: five items: "Revision sheet: quadratic word problems (8 questions)" Maths due Sat 10 Oct "To do"; "Balance 10 chemical equations" Science "To do"; "Letter to the editor: plastic in our city" English "Returned · 7/10"; "Map work: major rivers of India" Social science "Submitted"; "Exercise 4.3: quadratic equations (10 questions)" Maths "Returned · 8/10". Learn badge counts items to do plus new notes (4).
- Functions: open an item for teacher, due date and status; "How do you want to submit?" with "Photo of my notebook", "Upload a file", "Type my answer", and "Submit". Returned items show marks and feedback ("Strong arguments. Format: put the date below the sender's address, and keep the subject line under 10 words."; "Well done. Keep showing your working. · Checked by Dhruva, returned by Ms. Neha Arora").
- Interactions: Submit without a method: "Pick how you want to submit"; success toast "Submitted to Ms. Neha Arora" (no XP in the senior app); chip moves to "Submitted".

- Rules: the "Checked by Dhruva, returned by the teacher" line shows that Dhruva pre-checks and the teacher releases marks.

Notes and revision (Desktop: Notes & revision · Phone: Learn tab > Notes)

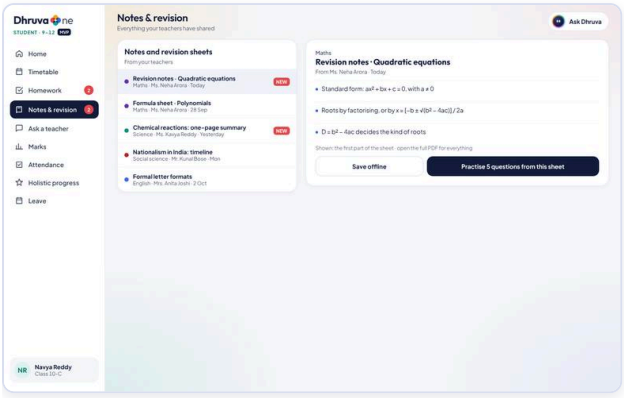

Desktop · Notes revision

- What it shows: "Revision notes · Quadratic equations" (Maths, Ms. Neha Arora, Today, NEW), "Formula sheet · Polynomials", "Chemical reactions: one-page summary" (NEW), "Nationalism in India: timeline", "Formal letter formats".
- Functions: open a note for its key points (for example "Roots by factorising, or by x = [−b ± √(b² − 4ac)] / 2a", "D = b² − 4ac decides the kind of roots"), "Shown: the first part of the sheet · open the full PDF for everything", "Save offline" (toast "Saved for offline reading"), "Practise 5 questions from this sheet" (toast "Practice opened · Dhruva marks it and shows the steps you missed").
- Interactions: opening clears "NEW" and the count. From Home the "Open the revision sheet" link opens the linked note.

Ask a teacher (Desktop: Ask a teacher · Phone: Learn tab > Ask)

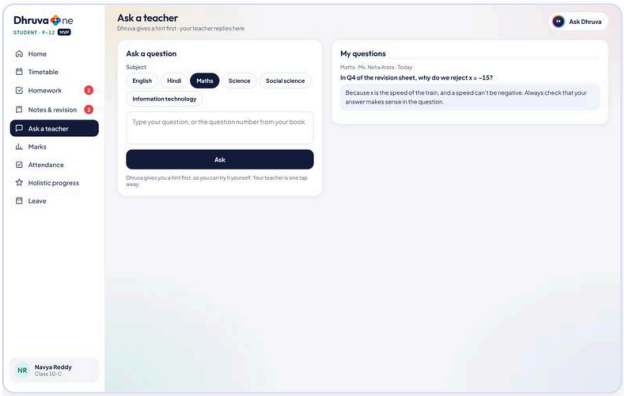

Desktop · Ask a teacher

- What it shows: subject pills (English, Hindi, Maths, Science, Social science, Information technology), question box, "Ask", "My questions" (Maths · Ms. Neha Arora · Today: "In Q4 of the revision sheet, why do we reject x = −15?" answered "Because x is the speed of the train, and a speed can't be negative. Always check that your answer makes sense in the question.").
- Interactions: same flow as the middle school app, tested there: "Ask" shows Dhruva's hint (for Maths: "in word problems, let x be what is asked, write one equation per sentence, then check if your answer makes sense (no negative speeds or ages)"); "Got it now" saves to a doubts list (toast "Saved to your doubts list", no XP); "Still stuck? Ask Ms. Neha Arora" sends it (toast "Sent to Ms. Neha Arora · you'll get a reply here") and a reply arrives in the thread. Empty question: "Type your question first".
- Rules: hint first, teacher second; closed doubts feed "Doubt clearer".

Marks (Desktop: Marks · Phone: Progress tab > Marks)

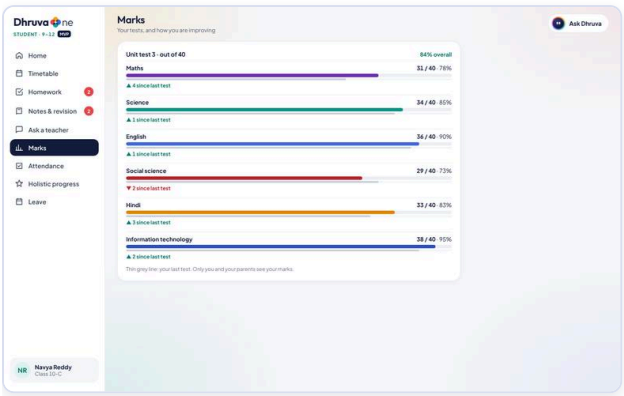

Desktop · Marks

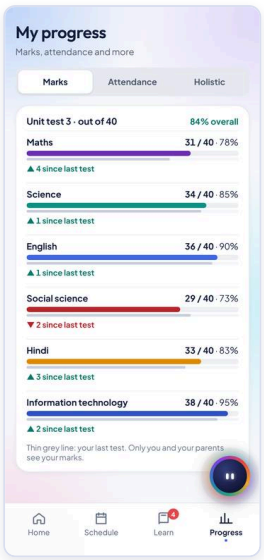

Phone · Progress

- What it shows: "Unit test 3 · out of 40 · 84% overall": Maths 31/40 · 78% "▲ 4 since last test", Science 34/40 · 85% "▲ 1", English 36/40 · 90% "▲ 1", Social science 29/40 · 73% "▼ 2", Hindi 33/40 · 83% "▲ 3", Information technology 38/40 · 95% "▲ 2"; footnote "Thin grey line: your last test. Only you and your parents see your marks." These match the numbers her father sees in the Parent app.

Attendance (Desktop: Attendance · Phone: Progress tab > Attendance)

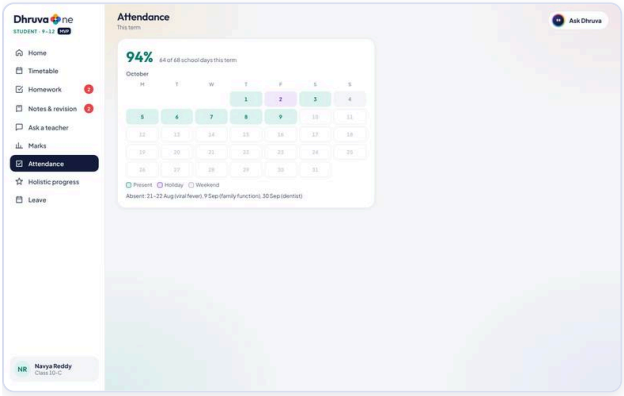

Desktop · Attendance

- What it shows: "94% · 64 of 68 school days this term", October calendar, legend Present/Holiday/Weekend, "Absent: 21–22 Aug (viral fever), 9 Sep (family function), 30 Sep (dentist)". Read-only.

Holistic progress (Desktop: Holistic progress · Phone: Progress tab > Holistic)

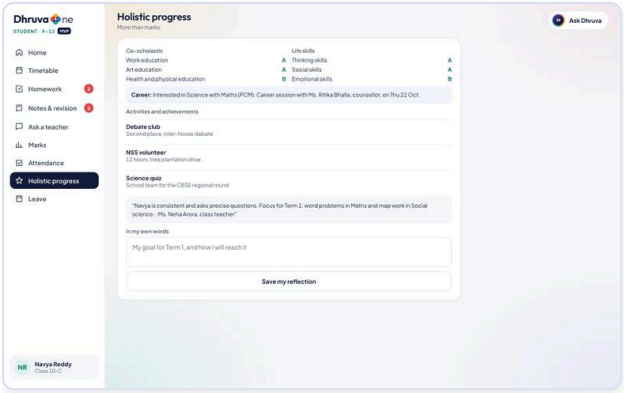

Desktop · Holistic progress

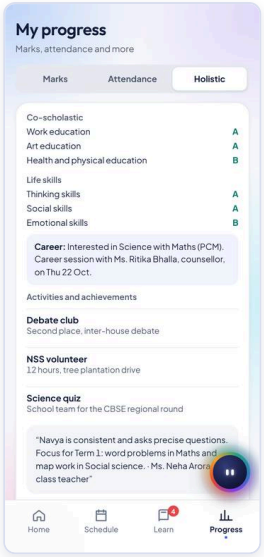

Phone · Holistic

- What it shows: "Co-scholastic" (Work education A, Art education A, Health and physical education B), "Life skills" (Thinking skills A, Social skills A, Emotional skills B), "Career: Interested in Science with Maths (PCM). Career session with Ms. Ritika Bhalla, counsellor, on Thu 22 Oct.", "Activities and achievements" (Debate club second place; NSS volunteer 12 hours; Science quiz school team for the CBSE regional round), class-teacher remark, and "In my own words" with the prompt "My goal for Term 1, and how I will reach it" and "Save my reflection" (toast "Saved · your class teacher sees it on your progress card").
- Difference from Classes 6–8: grades A/B for co-scholastic and life skills plus a career line, instead of four-level domain bars.

Leave (Desktop: Leave · Phone: tap the "NR" avatar on Home)

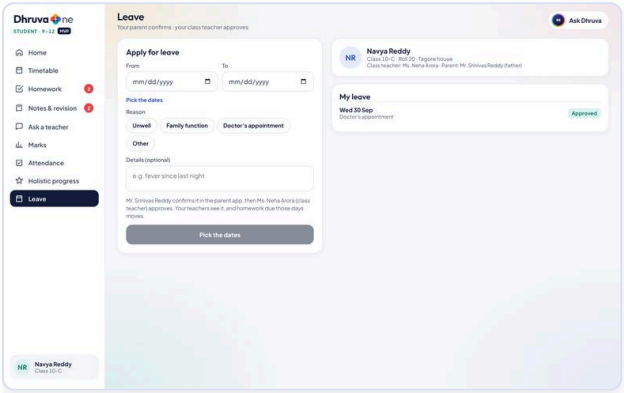

Desktop · Leave

- What it shows: profile ("Navya Reddy · Class 10–C · Roll 20 · Tagore house · Class teacher: Ms. Neha Arora · Parent: Mr. Srinivas Reddy (father)"), "Apply for leave" with From, To, reasons ("Unwell", "Family function", "Doctor's appointment", "Other"), details, route note "Mr. Srinivas Reddy confirms it in the parent app, then Ms. Neha Arora (class teacher) approves. Your teachers see it, and homework due those days moves.", "My leave" (Wed 30 Sep · Doctor's appointment · Approved).
- Interactions: "Send · Wed 21 Oct – Thu 22 Oct" -> toast "Sent to Mr. Srinivas Reddy to confirm"; status "Parent confirmed · with class teacher"; then "Leave approved by Ms. Neha Arora". This is the same request that shows on the Parent board home as "Navya asked for leave · Wed 21 – Thu 22 Oct · Family function · confirm so Ms. Arora can approve".
- Rules: two-step approval; Sundays not counted; end date cannot precede start.

Gaps / differences between desktop and phone

- Phone only: School calendar (inside Schedule), readiness ring with "How?" explainer sheet, subject sheet with "Start a 10–minute revision" and "Practise 5 questions", house-cup and achievements sheets, profile screen from the avatar, timed-paper screen logic.
- Desktop only: separate sidebar pages (Homework, Notes & revision, Ask a teacher, Marks, Attendance, Holistic progress, Leave), "Up next" list, the full study-plan list with tick boxes and "Open the revision sheet" links, "How ready am I?" bars, "Work on these", date-sheet chips, "Ask Dhruva" side panel.
- Desktop Dhruva answer says Maths first because it is the weakest revised subject (72%); the phone answer is shorter.

- Not shown in the design: a way to start the timed paper from the plan, subject choice for Classes 11–12 streams, board-exam date sheet, counsellor chat, notification settings.

PART 5

Channels

Phone app: sign-in, profiles and notifications

WhatsApp channel

B2B website

CHANNELS · IOS · ANDROID

Phone app: sign-in, profiles and notifications

One calm app, one mobile number and no password: the school's record is the account, one login opens every school and role linked to that number, and Dhruva (the orb) is the one colourful thing on every screen.

Who uses it. Everyone who uses the Dhruva One phone app (parents, students, teachers, HoDs, principals, owners, accounts, drivers and attendants, school admins). These screens are shared by all roles; role home screens are covered in the role inventories.

On the following pages:

Section 1. App icon (iOS and Android)
Section 2. First run (4 screens)
Section 3. Login and choose your profile (5 screens)
Section 4. Switch profile (5 screens)
Section 5. Personas: a home and one core task each
Section 6. Notifications (4 screens, then catalogue and rules in Part 4)
Section 7. Dhruva, the assistant (2 screens, images)
Section 8. Settings and sign out (3 screens)
Platform differences on the end-to-end journey boards
Lock-screen samples by role
Rules that keep it calm
Notification catalogue (event, who, message, tier, tap opens)
profile-switch explainer (desktop explainer, 1440 wide, with a working phone)
profile-switch prototype (phone prototype, 390 x 896)

Business summary

Signing in is deliberately short: enter the mobile number the school has on record, type a 6-digit code (auto-filled from Messages or sent on WhatsApp instead), and pick which profile to open. There are no passwords, no usernames and no school search. If the same number belongs to a teacher at one campus, a parent at another campus of the same group, and a parent at an unrelated school, the app shows all of them in one picker and lets the person switch between them without signing out. Staff profiles are protected by a PIN or Face ID or fingerprint, and a person's own children never appear in their staff profile.

Day to day, the app tells people what matters with short, named notifications: on the lock screen, as a banner, and in a notification centre with one action per card (for example "Pay now", "Track bus", "Remind"). Three tiers (Urgent, High, Normal) and quiet hours keep it calm: only safety alerts and overdue fees break the night. Fee and pickup alerts fall back to WhatsApp if the push is not opened in 30 minutes.

The design language ("Halo") keeps everything calm navy, ink and paper so the AI assistant, Dhruva, is always easy to find. The store kit gives the school ready-to-publish App Store and Google Play listings (name, description, keywords, privacy labels, five screenshot cards).

Daily story

- First launch: splash with the orb -> choose language -> a pre-permission screen "Never miss what matters" with the native notification prompt -> optional Face ID or fingerprint -> mobile number -> code -> "Hi Neha, who are you today?" -> "Good morning, Ms. Arora. Setting up your day at DPS Gurugram Sec 45: 6 classes and 1 cover." -> the home screen for that profile.
- Every later day: the app reopens on the last profile used (checkbox "Open the last profile I used next time" on the WhatsApp/OTP explainer board; "the app reopens on the last one you used" in the rules), asks for a biometric if enabled, and opens on what needs the person first.
- A parent sees the lock-screen cards (bus 10 minutes away, child reached school, fee due), taps one and lands on the matching screen.

iOS journey and Android journey (end-to-end journey)

Both boards are the same story with native chrome. Both are static boards (no clickable prototype); each caption is the exact on-board wording. Section headings on the board: "From the home screen to the right profile in under a minute." with a flow strip "1 App icon, 2 First run, 3 Login and profile, 4 Switch profile, 5 Personas, 6 Notifications, 7 Dhruva, 8 Settings".

Section 1. App icon (iOS and Android)

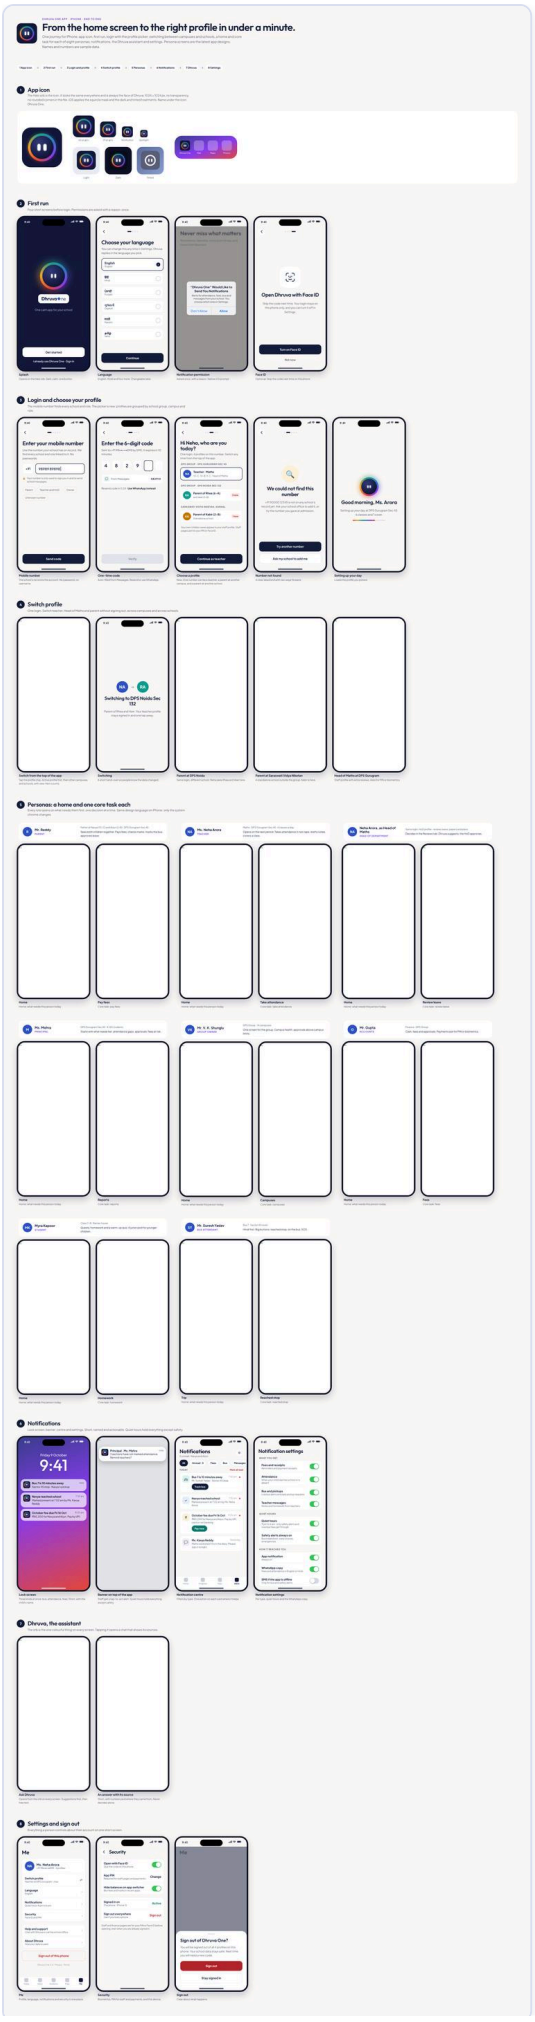
From the home screen to the right profile in under a minute.
App icon
First run
Choose your language
Never miss what matters
Open Dhruva with Face ID
Login and choose your profile
Enter your mobile number
Enter the 6-digit code
Hi Neha, who are you today?
We could not find this number
Good morning, Ms. Arora
Switch profile
Switching to DPS Noida Sec 132
Personas: a home and one core task each
Notifications
9:41
Notification settings
Dhruva, the assistant
Settings and sign out
Me
Security
Sign out of Dhruva One?

Dhruva One on the App Store and Google Play

Phone · Full

Phone · Full view

- Copy: "The Halo orb is the icon. It looks the same everywhere and is always the face of Dhruva." App name under the icon: "Dhruva One".
- iOS: 1024 x 1024 px, no transparency, no rounded corners in the file; iOS applies the squircle mask and the dark and tinted treatments. Shown at "60 pt @2×", "29 pt @3×", "Notification", "Spotlight"; variants "Light", "Dark", "Tinted"; a sample home-screen row with Mail, Maps, Photos.
- Android: adaptive icon 108 x 108 dp, artwork inside the 66 dp safe circle, navy background layer plus the Halo foreground, monochrome layer for themed icons, 512 x 512 Play Store icon. Shown at "xxxhdpi 192", "xxhdpi 144", "Notification", "Settings"; variants "Circle", "Squircle", "Themed (monochrome)".
- Status bar and notification icon use the one-colour Halo ring and eyes (store kit).

Section 2. First run (4 screens)

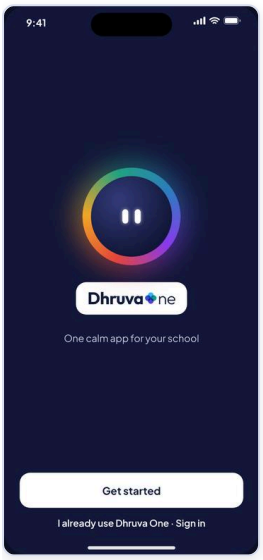

Phone · Splash

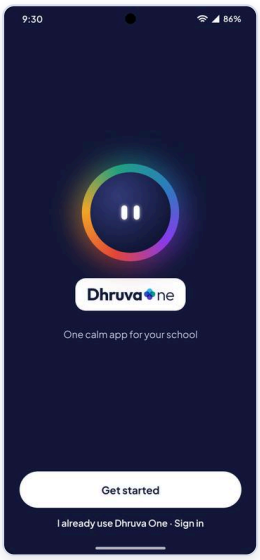

Phone · Splash

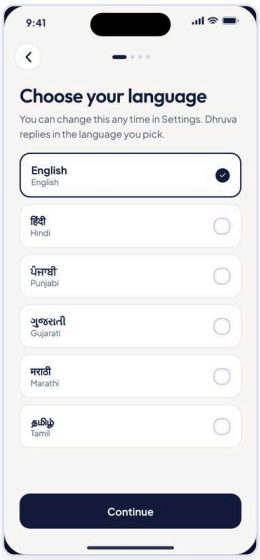

Phone · Language

Splash

- Dark navy, large Halo orb, "Dhruva One" wordmark, "One calm app for your school". Buttons: "Get started" (primary) and a text link "I already use Dhruva One · Sign in". Both lead to sign-in; in the interactive onboarding prototype "Get started" moves to the mobile-number screen.

Language

- "Choose your language": "You can change this any time in Settings. Dhruva replies in the language you pick." Six rows, native name plus English: English (selected, check), हिंदी Hindi, ਪੰਜਾਬੀ Punjabi, ગુજરાતી Gujarati, मराठी Marathi, தமிழ் Tamil. "Continue". Step dots at top (first of four), back arrow.
- Rule: language is chosen once up front and changeable in Me > Language. Elsewhere (notification rules) language is "English or Hindi, chosen at sign-in"; the board does not reconcile six languages here with two in the notification rules, so treat Hindi and English as the confirmed pair for Dhruva replies and notifications.

Notification permission

- Background copy "Never miss what matters / Attendance, fees due, the bus on its way, and notes from teachers." with the native prompt on top.
- iOS prompt: "“Dhruva One” Would Like to Send You Notifications. Alerts for attendance, fees, bus and messages from your school. You choose which ones in Settings." Buttons "Don't Allow" / "Allow".
- Android prompt: "Allow Dhruva One to send you notifications?" with "Allow" / "Don't allow".
- Caption: "Asked once, with a reason. Native iOS prompt." (or Android).

Face ID or Fingerprint

- "Open Dhruva with Face ID" (or "fingerprint"): "Skip the code next time. Your login stays on this phone only, and you can turn it off in Settings." Buttons "Turn on Face ID" / "Turn on fingerprint" and "Not now". Optional.

Section 3. Login and choose your profile (5 screens)

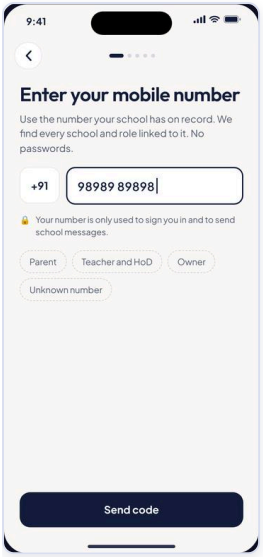

Phone · Mobile number

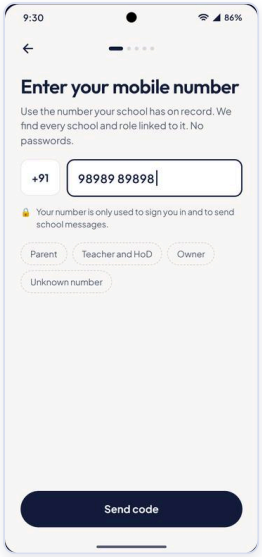

Phone · Mobile number

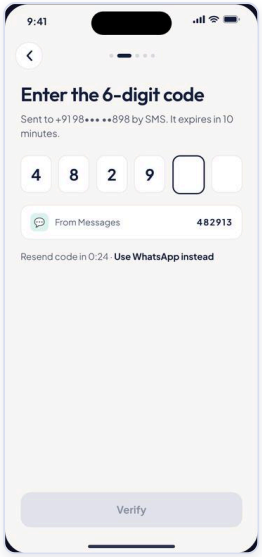

Phone · One time code

Mobile number

- "Enter your mobile number": "Use the number your school has on record. We find every school and role linked to it. No passwords." Country code "+91", number field (sample 98989 89898), lock line "Your number is only used to sign you in and to send school messages." Dashed sample chips: "Parent", "Teacher and HoD", "Owner", "Unknown number" (these are demo shortcuts on the board, not product controls). Button "Send code".
- Caption: "The school's record is the account. No password, no username."

One-time code

- "Enter the 6-digit code": "Sent to +91 98••• ••898 by SMS. It expires in 10 minutes." Six boxes (4829 typed), a suggestion row "From Messages 482913" (iOS keyboard autofill; Android shows the SMS-sourced code), "Resend code in 0:24 · Use WhatsApp instead". Button "Verify" (disabled until six digits).

Choose a profile (new in this version)

- "Hi Neha, who are you today?" "One login, 4 profiles on this number. Switch any time from the top of the app."
- Groups by school group, campus and role: "DPS GROUP · DPS GURUGRAM SEC 45": "Teacher · Maths" (10-C, 10-B, 9-C · Head of Maths) selected; "DPS GROUP · DPS NOIDA SEC 132": "Parent of Rhea (6-A) and Veer (3-B)" with red chip "2 new"; "SARASWATI VIDYA NIKETAN, KARNAL": "Parent of Kabir (2-B)", "Standalone school", chip "1 new".
- Footer: "Your own children never appear in your staff profile. Staff pages ask for your PIN or Face ID (fingerprint on Android)." Button "Continue as teacher" (label follows the selected profile).
- Note: the sample says "4 profiles" but three rows are shown (the fourth, Head of Maths, is the same Gurugram school; Section 4 lists it separately). The board does not draw a fourth row; the profile text "10-C, 10-B, 9-C · Head of Maths" shows teacher and HoD under one row.

Number not found

- "We could not find this number": "+91 90000 12345 is not on any school's record yet. Ask your school office to add it, or try the number you gave at admission." Buttons "Try another number" and "Ask my school to add me". Caption: "A clear dead end with two ways forward." What "Ask my school to add me" sends is not drawn.

Setting up your day

- Orb with a rainbow progress bar, "Good morning, Ms. Arora", "Setting up your day at DPS Gurugram Sec 45: 6 classes and 1 cover." (loads the picked profile).

Section 4. Switch profile (5 screens)

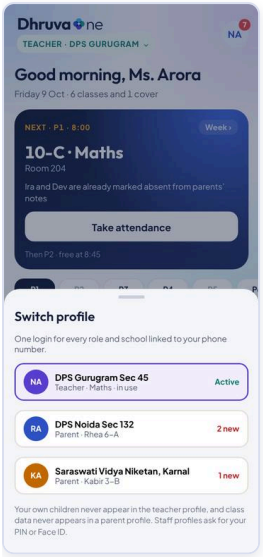

Phone · Teacher profiles

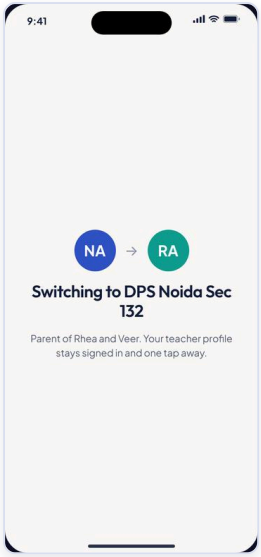

Phone · Switching

Phone · Switching

Intro: "One login. Switch teacher, Head of Maths and parent without signing out, across campuses and across schools."

- **Switch from the top of the app** (image-based, uses the teacher screen with profile chip; file): "Tap the profile chip. Active profile first, then other campuses and schools, with new-item counts."
- **Switching**: two avatars (NA to RA) with arrow, "Switching to DPS Noida Sec 132. Parent of Rhea and Veer. Your teacher profile stays signed in and one tap away." Caption: "A short hand-over so people know the data changed."
- **Parent at DPS Noida**: "Same login, different school. Neha sees Rhea and Veer here."
- **Parent at Saraswati Vidya Niketan**: "A standalone school outside the group. Kabir is here."
- **Head of Maths at DPS Gurugram**: "Staff profile with extra reviews. Asks for PIN or biometrics."

Section 5. Personas: a home and one core task each

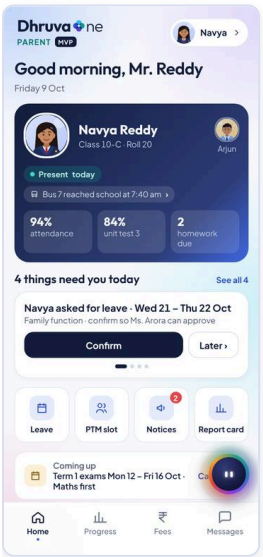

Phone · Parent home

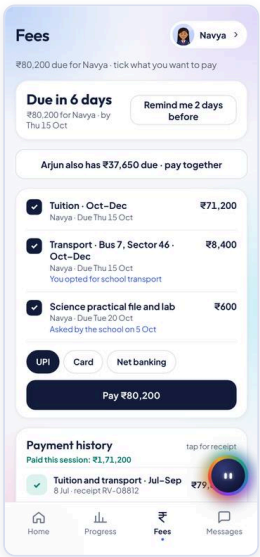

Phone · Parent fees

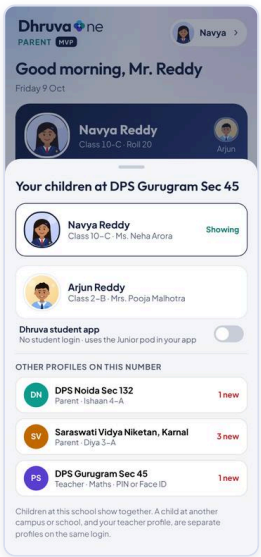

Phone · Parent kids

"Every role opens on what needs them first, one decision at a time. Same design language on iPhone (Android); only the system chrome changes." Each persona has a card (name, role tag, org, one-line behaviour) and two phone screens (Home and a core task). Screens are static images (full screens in `).

Persona	Role tag	Org and use	Home screenshot	Core task screenshot
Mr. Reddy	Parent	Father of Navya (10–C) and Arjun (2–B), DPS Gurugram Sec 45. "Sees both children together. Pays fees, checks marks, tracks the bus, approves leave."		"Pay fees": (also)

Persona	Role tag	Org and use	Home screenshot	Core task screenshot
Ms. Neha Arora	Teacher	Maths, 6 classes a day. "Opens on the next period. Takes attendance in two taps, drafts notes, covers a class."		"Take attendance":
Neha Arora, as Head of Maths	Head of department	"Same login, HoD profile, reviews leave, papers and plans. Decides in the Reviews tab. Dhruva suggests, the HoD approves."		"Review leave":
Ms. Mehra	Principal	DPS Gurugram Sec 45, 4,120 students. "Starts with what needs her: attendance gaps, approvals, fees at risk."		"Reports":
Mr. V. K. Shunglu	Group owner	DPS Group, 14 campuses. "One screen for the group. Campus health, approvals above campus limits."		"Campuses":
Mr. Gupta	Accounts	Finance, DPS Group. "Cash, fees and approvals. Payments ask for PIN or biometrics."		"Fees":
Myra Kapoor	Student	Class 7–B, Raman house. "Quests, homework and a warm-up quiz. A junior pod for younger children."		"Homework":
Mr. Suresh Yadav	Bus attendant	Bus 7, Sector 45 route. "Hindi first. Big buttons: reached stop, on the bus, SOS."	("Trip")	"Reached stop":

Section 6. Notifications (4 screens, then catalogue and rules in Part 4)

Phone · Lock screen

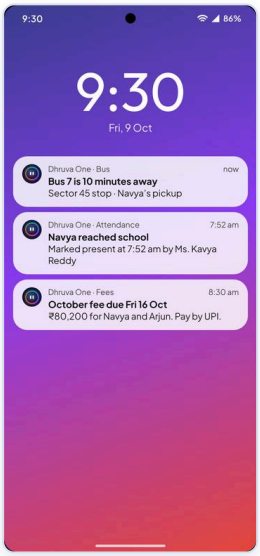

Phone · Lock screen

Phone · Principal home

- **Lock screen**: "Friday 9 October 9:41" with three stacked cards: "Bus 7 is 10 minutes away" (Sector 45 stop · Navya's pickup, now), "Navya reached school" (Marked present at 7:52 am by Ms. Kavya Reddy), "October fee due Fri 16 Oct" (Rs 80,200 for Navya and Arjun. Pay by UPI.). Android adds the channel in the header ("Dhruva One · Bus", "Attendance", "Fees"). Caption: "Three kinds at once: bus, attendance, fees. Short, with the child's name."
- **Banner on top of the app** (image of principal home with banner; underneath): "Principal · Ms. Mehra: 3 sections have not marked attendance. Remind teachers?" Android banner adds action buttons "Remind" and "Later". Caption: "Staff get a tap-to-act alert. Quiet hours hold everything except safety."
- **Notification centre**: see Part 3.
- **Notification settings**: section "WHAT YOU GET": toggles for "Fees and receipts" (Reminders and payment receipts), "Attendance" (When your child reaches school or is absent), "Bus and pickups" (Live bus alerts and early pickup requests), "Teacher messages" (Notes and homework from teachers). "QUIET HOURS": "Quiet hours" (9 pm to 6 am · only safety alerts and overdue fees get through) and "Safety alerts always on" (Bus breakdown, early closure, emergencies; shown on, locked). "HOW IT REACHES YOU": "App notification" (Always on), "WhatsApp copy" (Fees and attendance in English or Hindi, on), "SMS if the app is offline" (Only for bus and safety alerts, off). Note: this board says quiet hours 9 pm to 6 am; AppInbox and notification catalogue say 9 pm to 7 am.

Section 7. Dhruva, the assistant (2 screens, images)

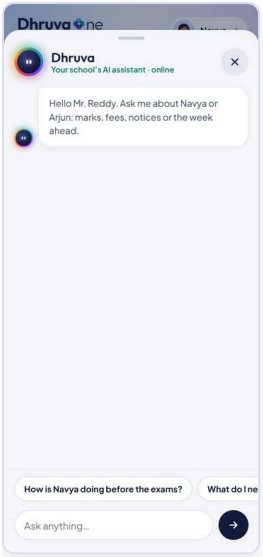

Phone · Ask idle

Phone · Ask chat

- "Ask Dhruva": "Opens from the orb on every screen. Suggestions first, then free text."
- "An answer with its source": "Short, with numbers and where they came from. Never decides alone."
- Heading copy: "The orb is the one colourful thing on every screen. Tapping it opens a chat that shows its sources."

Section 8. Settings and sign out (3 screens)

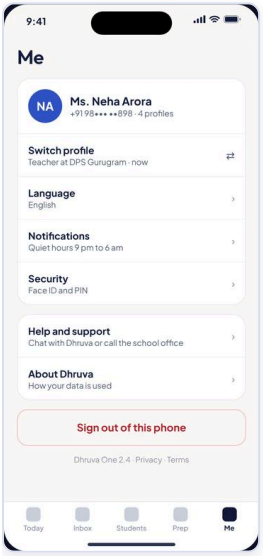

Phone · Me

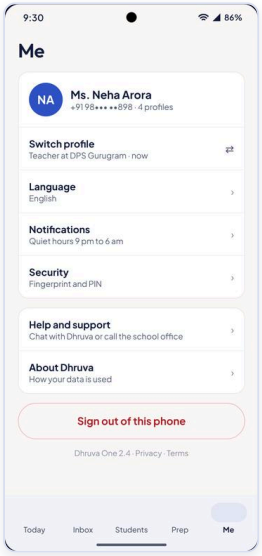

Phone · Me

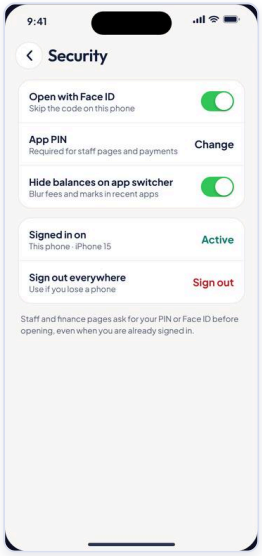

Phone · Security

- **Me**: profile card "Ms. Neha Arora, +91 98••• ••898 · 4 profiles". Rows: "Switch profile" (Teacher at DPS Gurugram · now), "Language" (English), "Notifications" (Quiet hours 9 pm to 6 am), "Security" (Face ID and PIN; Fingerprint and PIN on Android), "Help and support" (Chat with Dhruva or call the school office), "About Dhruva" (How your data is used). Red button "Sign out of this phone". Footer "Dhruva One 2.4 · Privacy · Terms". Staff tab bar shown: "Today", "Inbox", "Students", "Prep", "Me". Caption: "Profile, language, notifications and security in one place."
- **Security**: toggle "Open with Face ID" (Skip the code on this phone); "App PIN" (Required for staff pages and payments) with "Change"; toggle "Hide balances on app switcher" (Blur fees and marks in recent apps); "Signed in on" (This phone · iPhone 15, or Pixel 8) "Active"; "Sign out everywhere" (Use if you lose a phone) red "Sign out". Footer: "Staff and finance pages ask for your PIN or Face ID (fingerprint) before opening, even when you are already signed in."
- **Sign out**: bottom sheet "Sign out of Dhruva One?": "You will be signed out of all 4 profiles on this phone. Your school data stays safe. Next time you will need a new code." Red "Sign out", outline "Stay signed in".

Platform differences on the end-to-end journey boards

- iOS: Dynamic Island, native iOS notification prompt with "Don't Allow / Allow", Face ID, 51 pt toggles, squircle icon with Light/Dark/Tinted, lock screen shows time 9:41 and "Friday 9 October". Android: punch-hole, Material 3 prompt "Allow Dhruva One to send you notifications?", fingerprint, Material toggles, adaptive circle icon with themed monochrome layer, 9:30 clock

and "Fri, 9 Oct", channel names in lock-screen cards, action buttons on the banner ("Remind", "Later"), "Pixel 8" device row, Android tab bar with pill indicator.

onboarding prototype (iOS) and onboarding prototype (Android) (interactive sign-in prototype)

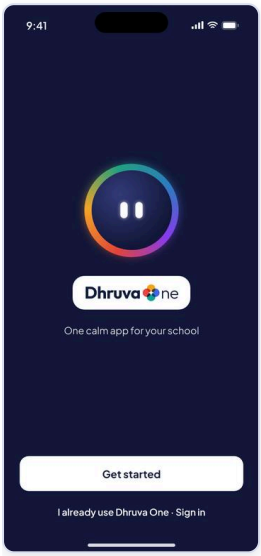

Phone · Start

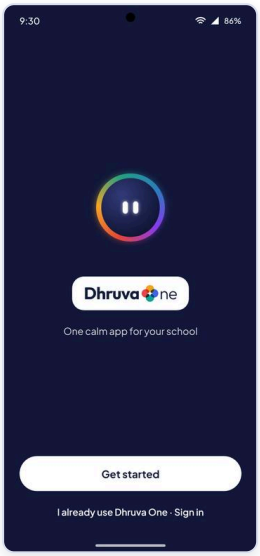

Phone · Start

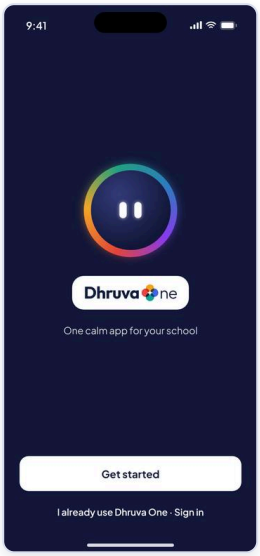

Phone · Splash

Step	Screen and copy	Controls and results
0	Splash: "One calm app for your school"	"Get started" -> step 1. "I already use Dhruva One · Sign in"
1	"Enter your mobile number": "Use the number your school has on record. We find your school for you, so there is nothing to search. No passwords."	"+91" field (10 digits, digits only). Demo chips: "Sample parent number" (9876543210 -> DPS Gurugram Sec 45), "Sample admin number" (9812345678 -> Saraswati Vidya Niketan), "Unknown number" (9000012345), "Two schools" (9898989898 -> DPS Gurugram and Greenfield Public School). "Send code": fewer than 10 digits -> toast "Enter your 10-digit mobile number"; number not on any record -> inline "This number is not registered with any school. Ask your school office to add it, then try again.".
2	"Enter the code": "We sent a 6-digit code to +91 98•••••898."	Six boxes plus "Type the code" (Android) field; chip "From Messages 482913" (iOS) or "482913 from SMS" (Android) that fills the code; "Resend in 0:28"; "Verify" -> toast "Enter the 6-digit code" if incomplete.
3	School found. Single school: "We found your school / Picked up from the mobile number you just verified." with the school card, "Signing in as" and "Your role" (: Saraswati Vidya Niketan, Karnal · Standalone school · CBSE; Mrs. Meena Sharma; School admin) and button "Continue as Meena". Several schools: "Choose your school: This number is registered with 2 schools. Pick the one to open now. You can switch later in Settings."	Radio cards: "DPS Gurugram Sec 45 / Gurugram · DPS Group · CBSE / Parent of Vivaan (5-B) and Aarav (2-A)"; "Greenfield Public School / Jaipur · CBSE / Parent of Vivaan (5-B)". Button "Choose a school" (disabled) becomes "Continue with <school>". Link text: "Not you or not your school? Go back and use a different number."
4	Notifications ask: "Never miss what matters. Turn on notifications so the important things find you." with "Fees and receipts: A reminder a week before, and the receipt after.", "Bus and early pickups: Know when the bus is close, and approve pickups.", "Quiet at night: Nothing from 9 pm to 7 am, except safety alerts."	"Turn on notifications" opens the native prompt (: ""Dhruva One" Would Like to Send You Notifications. Notifications may include alerts, sounds, and icon badges. These can be configured in Settings."); Allow -> step 5 with notifications On ("On · quiet 9 pm to 7 am"); Don't Allow -> step 5 and toast "You can turn them on later in Settings"; "Not now" -> step 5 ("Off · turn on in Settings").
5	"Sign in faster next time": "Use Face ID on this phone instead of a code. Your face or fingerprint never leaves your phone."	"Turn on Face ID" / "Not now" -> step 6.
6	"You're in, <first name>" summary: School, You are, Notifications, Face ID (On/Off)	"Open Dhruva One" -> toast "Opens the parent home" (or "admin home" for the standalone school). "Start again" restarts.

- Back arrow steps back one step. Step dots show progress (five dots).
- Differences vs end-to-end journey: this prototype picks a school (not a profile or role), has no language step, asks for notifications after the school and biometrics after that, and uses the pink-red primary. The end-to-end journey boards are the later, fuller design (language, multi-role profile picker).
- Android prototype follows the same steps with an SMS-sourced code chip and Material controls.

---

notification centre prototype (iOS) and notification centre prototype (Android) (notification centre prototype)

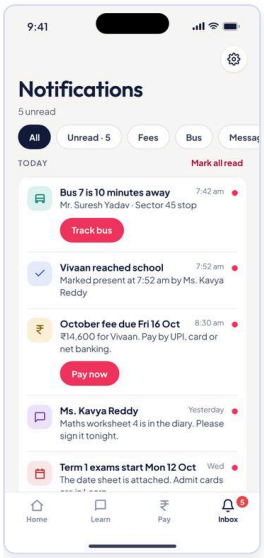

Phone · Start

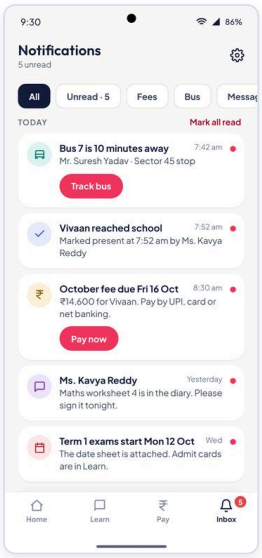

Phone · Start

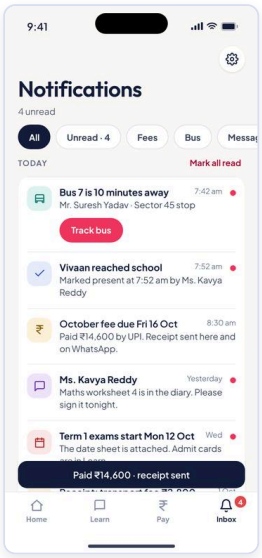

Phone · Pay now paid

- **Shows:** title "Notifications" with unread count ("5 unread"), a gear (aria "Settings"), filter chips "All", "Unread · 5", "Fees", "Bus", "Messages", "School", a "TODAY" group with link "Mark all read", and earlier items. Bottom tab bar "Home", "Learn", "Pay", "Inbox" (badge 5).
- **Items (sample, parent Pooja Sharma / Vivaan 5–B):** "Bus 7 is 10 minutes away" (7:42 am, Mr. Suresh Yadav · Sector 45 stop, action "Track bus"); "Vivaan reached school" (7:52 am, Marked present at 7:52 am by Ms. Kavya Reddy); "October fee due Fri 16 Oct" (8:30 am, Rs 14,600 for Vivaan. Pay by UPI, card or net banking., action "Pay now"); "Ms. Kavya Reddy" (Yesterday, Maths worksheet 4 is in the diary. Please sign it tonight.); "Term 1 exams start Mon 12 Oct" (Wed, The date sheet is attached. Admit cards are in Learn.); "Receipt: transport fee Rs 2,800" (1 Oct, Paid on 1 Oct by UPI. Receipt sent on WhatsApp.); "Diwali break 7 to 11 Nov" (30 Sep, School reopens Thursday 12 November.).
- **Interactions (verified):** tapping an item marks it read (unread dot and count drop); "Mark all read" marks all; filter chips filter by type ("Unread · N" recalculates; "School" covers attendance/notices); "Pay now" turns the fee card into "Paid Rs 14,600 by UPI. Receipt sent here and on WhatsApp." with toast "Paid Rs 14,600 · receipt sent" (unread count falls from 5 to 4); "Track bus" shows toast "Opens the live bus map".
- **Settings sheet** (gear, "Done" to close): "YOUR SCHOOL" (DPS Gurugram Sec 45, Parent of Vivaan (5–B) and Aarav (2–A), button "Switch"; tapping switches to Greenfield Public School and toasts "Switched to <school>", and the list filters to that school's items); "WHAT YOU GET" topic toggles: Fees and receipts, Attendance, Bus and pickups, Exams and results (Date sheets, admit cards and results), Teacher messages, School notices (Holidays, meetings and circulars); "HOW IT REACHES YOU": "Push notifications" (On this phone), "WhatsApp if push is not opened" (Fees and pickups only, after 30 minutes), "SMS for gate safety" (Always on, locked); "QUIET HOURS": "Quiet hours · 9:00 pm to 7:00 am" (Alerts wait until morning), "Urgent safety alerts still come through" (Early pickups and gate incidents. Can't be turned off, locked); "LANGUAGE": English or हिन्दी. Tapping a locked toggle shows "Safety alerts can't be turned off".
- **Platform:** iOS uses iOS toggles and squircles; Android uses Material 3 toggles and a pill indicator.

---

notification catalogue (catalogue and rules)



Phone · Full

Lock-screen samples by role

- Parent (Pooja Sharma, Parent · Vivaan, Class 5–B), iPhone: "Bus 7 is 10 minutes away / Mr. Suresh Yadav · Sector 45 stop"; "Fee due Fri 16 Oct / Rs 14,600 for Vivaan. Pay by UPI or card."; "Vivaan reached school / Marked present at 7:52 am". Android with actions: "Track" and "Mute today" on the bus alert, "Pay now" and "Remind me" on the fee alert.
- Teacher (Ms. Kavya Reddy, Class 7–C): "Cover: 8–B, period 4 / Room 12 · Ms. Rekha Yadav is absent" (Android actions "Accept", "Swap"); "7–C attendance not marked / Period 1 ended 40 minutes ago" (action "Mark now"); "Leave approved / Casual leave, Mon 12 Oct".
- Principal (Ms. Neelam Mehra): "Unknown man near Gate 2 / Waiting 40 min · Harish Chand is 1 min away"; "2 decisions need you / STEM Lab Rs 18.5 L · RTO renewal"; "Attendance down 6 pts / Gurugram Grades 9 to 12".
- School admin (Mrs. Meena Sharma, standalone school), Android: "Cover needed for 11 periods / Two teachers are absent today" (actions "Assign", "Later"); "3 leave requests waiting / Dhruva checked who can cover" (action "Review"); "October salary: 3 changes / Confirm before Fri 30 Oct".

Rules that keep it calm

1. **Three tiers:** Urgent breaks quiet hours and repeats once after 5 minutes. High shows a banner in school hours and waits overnight. Normal is silent and grouped.
2. **Quiet hours 9 pm to 7 am:** parents can change them. Safety alerts and early pickups still come through; parents cannot turn those off.
3. **Android channels:** Safety, Fees, Bus, School updates and Messages; each can be muted on its own in system settings. iOS uses Time Sensitive for Urgent only.
4. **Fallbacks:** if push is not opened in 30 minutes, fee and pickup alerts go to WhatsApp. SMS is used for gate safety only.
5. **No marketing, ever:** students from Class 6 get homework and results only. Nothing is sent for promotion; the school sets who can send notices.
6. **Language:** English or Hindi, chosen at sign-in. Numbers and dates stay the same in both.

Notification catalogue (event, who, message, tier, tap opens)

Event	Who	Message	Tier	Tap opens
Child marked present	Parent	Vivaan reached school · 7:52 am	Normal	Attendance
Child absent, not marked by 9 am	Parent	Vivaan is marked absent. Tap if this is wrong.	High	Message teacher
Fee due in 7 days, then overdue	Parent	October fee Rs 14,600 is due Fri 16 Oct	Normal	Pay
Bus 10 minutes away or late	Parent	Bus 7 is 10 minutes from your stop	High	Live map
Early pickup by someone new	Parent	Kiara 3–B: pickup by uncle. Is this OK?	Urgent	Approve or refuse
Class attendance not marked	Teacher	7–C attendance not marked	Normal	Mark
Cover assigned	Teacher	Cover 8–B, period 4 · Room 12	High	Timetable
Leave decided	Staff	Casual leave Mon 12 Oct approved	Normal	Leave
Decision waiting	Principal, admin	2 decisions need you	Normal	Today
Safety incident	Principal, security	Unknown man near Gate 2	Urgent	Job
Salary credited	Staff	October salary credited · payslip ready	Normal	Payslip

Event	Who	Message	Tier	Tap opens
Results published	Parent, student	Term 1 results are out	Normal	Results

profile-switch explainer and profile-switch prototype (profile and school switching rules)

profile-switch explainer (desktop explainer, 1440 wide, with a working phone)



Phone · ProfileSwitch full view

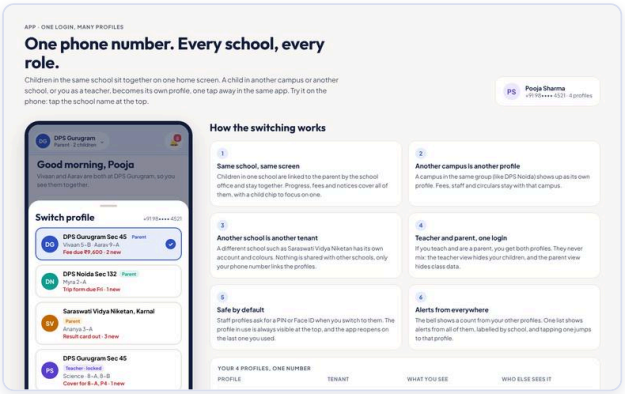

Desktop · ProfileSwitch sheet

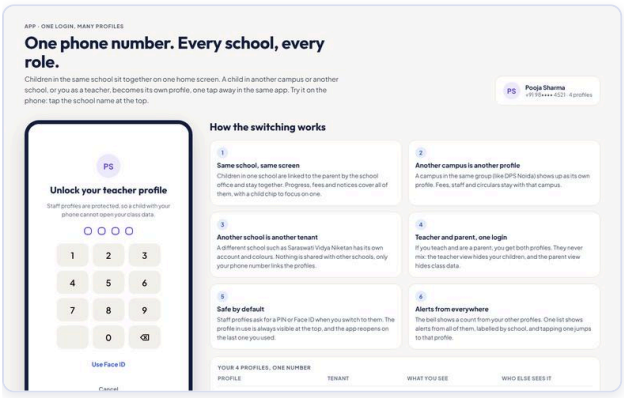

Desktop · ProfileSwitch pin lock

- **Header:** "APP · ONE LOGIN, MANY PROFILES / One phone number. Every school, every role." Copy: "Children in the same school sit together on one home screen. A child in another campus or another school, or you as a teacher, becomes its own profile, one tap away in the same app. Try it on the phone: tap the school name at the top." User chip: "Pooja Sharma, +91 98•••• 4521 · 4 profiles".
- **Working phone:** top bar with the profile chip (school short name and role · detail, for example "DPS Gurugram · Parent · 2 children"), a bell with a count of items needing attention in the other profiles, and a tab bar (Home, Progress, Fees, Dhruva for parents; Today, Classes, Marks, Dhruva for teachers; Home, Results, Fees, Dhruva for the Karnal school).
- **Profiles (sample):** (1) Parent · DPS Gurugram Sec 45: Vivaan 5–B and Aarav 9–A together, "Fee due Rs 9,600 · 2 new". Home shows "Good morning, Pooja", "Vivaan and Aarav are both at DPS Gurugram, so you see them together." and one card per child (Present, homework, maths unit test, bus; Aarav: attendance 94%, science project, fees for both children Rs 9,600 due 15 Oct). Note: "Two children, one school: they stay together on this screen. Use the chips at the top of Progress to look at one child." (2) Parent · DPS Noida Sec 132: Myra 2–A, "Trip form due Fri · 1 new"; "same DPS Group, so the look is the same but the data is separate". (3) Parent · Saraswati Vidya Niketan, Karnal: Ananya 3–A, "Result card out · 3 new", own colours, "its fees, staff and records are kept in a completely separate space". (4) Teacher · DPS Gurugram Sec 45 (locked): Science · 8–A, 8–B, "Cover for 8–A, P4 · 1 new"; home shows Period 2 8–A Science and Period 4 cover for 8–A with "Needs you"; "Same phone number, different role. Staff data is locked behind your PIN or Face ID."
- **Interactions (verified):**
- Tap the profile chip (aria "Switch profile") -> bottom sheet "Switch profile" with phone number, one row per profile (school, role tag, children or classes, red "needs you" line, check on current) and a dashed button "+ Add a profile with another number" (toast: "Add a profile: enter a different number and verify it with an OTP"). Tap outside closes.
- Tap another profile -> sheet closes, home switches with that profile's colours and menu, toast "Switched to <school> · <role>". Tapping the current profile just closes the sheet.

- Tap the locked teacher profile -> lock screen "Unlock your teacher profile": "Staff profiles are protected, so a child with your phone cannot open your class data." Four-dot PIN entry with a keypad (any 4 digits unlock in the prototype), "Use Face ID" (unlocks instantly, toast "Unlocked with Face ID · Teacher at DPS Gurugram"), "Cancel". Successful PIN toasts "Unlocked · Teacher at DPS Gurugram".
- Bell (aria "<n> items need you in your other profiles") -> "All alerts" list across profiles, each labelled "<SCHOOL> · <ROLE>" with its text and time (examples: Term 1 result card for Ananya is out 9:12 am; Aarav: Science project due Fri 16 Oct; Fee reminder Rs 9,600 due 15 Oct; You are asked to cover 8–A in period 4; Myra: zoo trip form due Fri). Tapping an alert jumps to that profile (and asks for the PIN if staff and locked). "Close" dismisses.
- **"How the switching works" (6 rules):** 1 Same school, same screen (children in one school are linked to the parent by the school office and stay together; progress, fees and notices cover all of them, with a child chip to focus on one). 2 Another campus is another profile (a campus in the same group, like DPS Noida, shows up as its own profile; fees, staff and circulars stay with that campus). 3 Another school is another tenant (a different school such as Saraswati Vidya Niketan has its own account and colours; nothing is shared with other schools; only your phone number links the profiles). 4 Teacher and parent, one login (you get both profiles and they never mix; the teacher view hides your children, the parent view hides class data). 5 Safe by default (staff profiles ask for a PIN or Face ID when you switch to them; the profile in use is always visible at the top; the app reopens on the last one you used). 6 Alerts from everywhere (the bell shows a count from your other profiles; one list shows alerts from all of them, labelled by school; tapping one jumps to that profile).
- **"Your 4 profiles, one number" matrix:** Parent · DPS Gurugram (tenant DPS Group; sees Vivaan and Aarav together; also seen by class teachers and the fee office of Gurugram); Parent · DPS Noida (DPS Group; Myra; class teachers and fee office of Noida); Parent · Saraswati VN (own school; Ananya; Saraswati staff only); Teacher · DPS Gurugram (DPS Group; classes 8–A and 8–B; HoD, principal, coordinator).
- **"Where else profiles appear":** (1) Sign in with OTP: "Welcome back, Pooja. We found 4 profiles on this number. Pick where to start. You can switch any time from the top of the app." with rows for DPS Gurugram Sec 45 (Parent · Vivaan 5–B · Aarav 9–A), DPS Noida Sec 132 (Parent · Myra 2–A), Saraswati Vidya Niketan, Karnal (Parent · Ananya 3–A), DPS Gurugram Sec 45 (Teacher · locked · Science · 8–A, 8–B) and the checkbox "Open the last profile I used next time". (2) On WhatsApp: the number is linked to several schools; Dhruva asks "Hi Pooja, this number is linked to 3 schools. Which one do you mean?" with buttons "DPS Gurugram · Vivaan, Aarav", "DPS Noida · Myra", "Saraswati Vidya Niketan · Ananya"; after "DPS Noida · Myra", "DPS Noida Sec 132: Myra was present 5 of 5 days this week. I will remember this school for the next 30 minutes. Type “switch” to change." (3) On the laptop (teacher and parent web): profile chip "Teacher · DPS Gurugram" in the top bar with a "SWITCH PROFILE" list including "n new" counts; "WHAT CHANGES: The menu, the colours and the data all change with the profile. A teacher profile opens the timetable, marks and lesson plans. A parent profile opens the child's progress and fees. The browser asks for the PIN again after 15 minutes on a staff profile." Shortcut: "Ctrl + K, then type a school name."
- This conflicts mildly with the WhatsApp prototype boards (which assume one child and one school per number); the multi-school WhatsApp behaviour is described only here.

profile-switch prototype (phone prototype, 390 x 896)

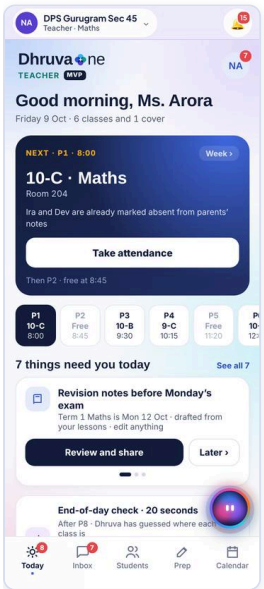

Phone · ProfilePrototype teacher home

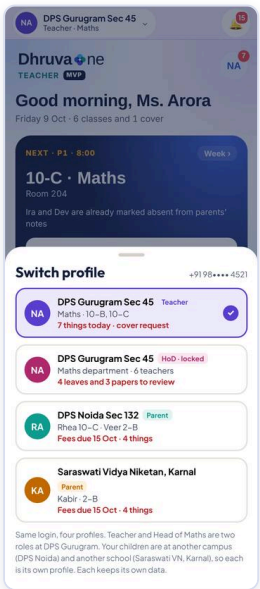

Phone · ProfilePrototype switch sheet

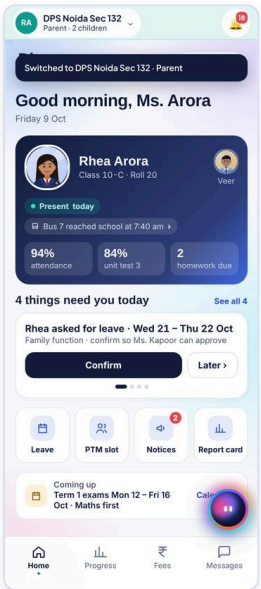

Phone · ProfilePrototype parent noida

- Same switcher mechanics but each profile loads the real role screen inside: Teacher (Maths, Ms. Neha Arora, 10–B/10–C, 7 things today, cover request), "Head of Maths" HoD (staff, locked: "4 leaves and 3 papers to review"), parent at DPS Noida Sec 132 (Rhea 10–C, Veer 2–B, "Fees due 15 Oct · 4 things"), parent at Saraswati Vidya Niketan, Karnal (Kabir 2–B).
- Top bar tinted per profile (colour per role and school), bell badge shows items in the other profiles (initially 15). Staff profiles require the 4–digit PIN or Face ID once per session (an unlocked profile stays unlocked until reload). Tapping an alert in "All

alerts" jumps to that profile. Toasts: "Switched to <school> · <role>" and "Unlocked · <role> at <school>".

- Alerts list (sample): "10–C period 1 attendance is not marked", "Cover request: 9–B Maths, period 4", "4 leave requests and 3 papers wait for you", "Rhea asked for leave 21 to 22 Oct, please confirm", "Fees due Thu 15 Oct", "Kabir: fees due Thu 15 Oct", "Spelling test Wed 14 Oct". Note under the sheet: "Same login, four profiles. Teacher and Head of Maths are two roles at DPS Gurugram. Your children are at another campus (DPS Noida) or another school (Saraswati VN, Karnal). Each keeps its own data."

Halo design language (assistant faces and design language)



Phone · Full

- **How it feels:** "Dhruva is the face": the orb is the one colourful thing; everything around it is calm navy, ink and paper. "One decision at a time": Home shows one Dhruva card with "Later ›" and "See all"; details open in sheets; no dashboards of ten widgets. "Native on each phone": same content and colours, iOS keeps its tab bar and squircle radii, Android uses Material 3 shapes, nav bar and extended button.
- **Colour tokens:** Deep #14183A (orb, hero, dark cards); Ink #141E3C (text, primary button); Paper #FAF8F6 (app background); Surface #FFFFFF (cards, sheets); Mist #ECE9FB (tonal fills, Android); Line #E6E9F0 (dividers); Text 2 #525B70 (secondary text); Go #0B7A6C (paid, present, done); Warn #F4A72A (due soon); Alert #E5483B (absent, overdue); Info #2F7EC1 (neutral info); Dhruva #8B3CF0 (AI moments only). "The ring": the multi-colour ring appears only on Dhruva (icon, orb, assistant button, first-run splash), never on buttons or text, so it always means "AI".
- **Type:** Outfit for display, Plus Jakarta Sans for text. Display 30 ("Good morning, Pooja"), Title 22 ("October fees are due"), Heading 17 ("Vivaan reached school"), Body 15, Caption 12.5, Label 11 ("DHRUVA · 1 OF 3").
- **Shape, space, depth:** radius 14 for inputs, 20 for cards, 28 for sheets, pill for buttons; 8–point grid; 16 px screen margins; one shadow only (0 6px 18px rgba(20,24,58,0.12)) used for floating things (the Dhruva button, sheets); everything else flat on Paper with a 1 px Line border.
- **"Meet Dhruva: one face, six states":** Idle (breathes slowly, blinks every 4 s, the default); Listening (eyes tall, a violet pulse, mic is open); Thinking (ring spins fast, eyes glance up and right); Done (smiling eyes for 2 s after a task finishes); Needs you (amber ring and pulse, urgent only: overdue fees, safety); Quiet hours (dim ring, closed eyes, no sound or buzz). Motion is slow and quiet, nothing bounces; with "Reduce motion" on, every state is a still pose and the ring does not spin.
- **Screens (parent, Pooja Sharma, Vivaan 5–B, DPS Gurugram Sec 45, Fri 9 Oct 2026):**
- iOS Home: school chip "DPS Gurugram Sec 45", "Good morning, Pooja", child chip "V 5–B", one Dhruva card "DHRUVA · 1 OF 3: October fees of Rs 14,600 are due on Fri 16 Oct. Pay now by UPI. The receipt arrives on WhatsApp." with "Pay now · UPI", "Later ›", "See all 3 ›"; tiles Vivaan Present 7:52 am, Bus 7 10 min Sector 45 stop, Homework 2 due Maths, Hindi; "Ask Dhruva anything…" bar; "PTM · Saturday 17 Oct, 9 am to 12 pm · book a slot"; tab bar Home, Learn, Dhruva (centre, "so one thumb always reaches it"), Pay, Inbox.
- iOS Dhruva chat: "Cards with real actions, not just text. Pay, book and download without leaving the chat." Q "When is the parent-teacher meeting?" -> "Saturday 17 Oct, 9 am to 12 pm. Ms. Kavya Reddy has a free slot at 10:20 am." with buttons "Book 10:20 am", "Other times". Q "Why is October's fee Rs 14,600?" -> break-up card (Tuition Rs 11,800, Transport (Bus 7) Rs 2,800, Late fee Rs 0, Total Rs 14,600) with "Pay now", "Download invoice". Suggestion chips "Homework due", "Bus status", "Fee receipt".
- Android Home: same content, tonal fills, pill nav indicator, Dhruva as an extended button "Ask Dhruva", tabs Home, Learn, Pay, Inbox. Android Dhruva: top app bar "Dhruva / online · replies in Hindi or English", rounded-square input, same action cards.

store listing kit (store listing content)

Phone · Full

- **App Store listing:** name "Dhruva One: School App"; subtitle "Parents, students and staff"; "Education · Age 4+ · Free · iPhone and iPad · iOS 15 or later". Promotional text: "Learning, reimagined with AI. Ask Dhruva about fees, marks and dates, and see attendance, the bus and every notice in one calm app." Keywords (100 chars): "school app,ai assistant,parent,fees,attendance,bus tracking,homework,timetable,teacher,report card". Description: "Dhruva One is the app your school uses, with Dhruva, an AI assistant, built in. Ask about fees, marks, meetings or the timetable, in Hindi or English. Parents see attendance, fees, the bus, homework and results. Teachers mark attendance in seconds and see which students need help. Admins run the day from one simple screen. Sign in with the mobile number your school has on record." Privacy labels: "Data linked to you: contact info, identifiers, user content. No tracking. No third-party ads." What's new: "Meet Dhruva, now in the app. Ask about fees, marks and dates. Plus quiet hours and faster sign-in with Face ID."
- **App Store screenshots (6.7 inch, five cards, in this order):** (1) "Learning, reimagined with AI / Ask Dhruva about fees, marks and dates, in Hindi or English" (chat with PTM answer and "Book 10:20 am"); (2) "Your child's school, in one calm app / Attendance, homework and notices at a glance" (Hi Pooja, Vivaan · Class 5–B; Vivaan reached school; Fees due Rs 14,600; Bus 7 10 min; Homework); (3) "Pay fees in two taps / UPI, cards and receipts on WhatsApp" (Fees, DUE FRI 16 OCT, Rs 14,600, Tuition Rs 11,800, Transport Rs 2,800, Late fee Rs 0, "Pay now · UPI", "Receipt arrives here and on WhatsApp"); (4) "See the bus coming / Live bus and early pickup alerts" (Bus 7, 10 minutes from Sector 45 stop, Mr. Suresh Yadav · now at Golf Course Rd, Vivaan boards 7:58 am); (5) "Teachers: attendance in seconds / Dhruva flags who needs help" (7–C · Period 1, 5 present · 1 absent · 36 students, "Submit attendance", tabs Today, Classes, Marks, Me). Note: "Order matters: the first three are what a parent sees without scrolling, and the AI assistant leads. Captions are short enough to read at thumbnail size. Staff views come last."
- **Google Play listing:** name "Dhruva One: School App"; subtitle "Fees, bus, attendance and notices"; "Education · Everyone · Free · Android 8.0 or later · Contains no ads"; short description (80): "Ask Dhruva, the AI assistant for your school. Fees, bus, attendance and notices."; the same full description; data safety: "Data shared: none with third parties. Data collected: name, phone, school records. Encrypted in transit. You can ask your school to delete it."; content rating: "Everyone. No user-to-user chat outside the school's own teachers and parents."; what's new: "Meet Dhruva, now in the app. Ask about fees, marks and dates. Plus quiet hours and fingerprint sign-in." Screenshots: the same first four cards, fifth card is the admin view "Admins: one decision at a time / Dhruva finds cover and chases fees" ("Good morning, Mrs. Sharma, 502 students · 30 staff", "8 THINGS NEED YOU · 1 OF 8", "2 classes have not marked attendance, Class 4–A and 8–B", "Remind teachers", "Later ›", Students present 468 of 502, October fees in 71%, tabs Today, People, Money, Intake, School). Note: "Same story, with the admin view in slot five so small-school buyers find it. The 1024 x 500 feature graphic has its own board: Halo on navy with 'Learning, reimagined with AI.'"

Gaps / differences between boards and platforms

- end-to-end journey (newer) has language, profile picker, biometrics and a four-screen first run; AppOnboard (older) has a school picker, pink accent and no language step. They are not reconciled: the later end-to-end journey flow should be treated as the target, and AppOnboard as a prototype of OTP and school lookup.
- The end-to-end journey boards are static: no tappable states for the sign-in screens; AppOnboard, AppInbox, profile-switch explainer and profile-switch prototype are interactive.
- Quiet hours differ across boards (9 pm to 6 am on end-to-end journey Me and settings; 9 pm to 7 am on AppOnboard, AppInbox and notification catalogue).
- Language: six languages in end-to-end journey, two (English, Hindi) in AppInbox, notification catalogue, store listing kit and WhatsApp.
- The end-to-end journey persona list covers 8 personas only; Admin (store kit and notifications), Transport, HR, Admissions, Counsellor, Exam and Security are not in the end-to-end journey.
- Android differences: fingerprint, Material prompts and toggles, channel names on lock-screen cards and banner action buttons; behaviour otherwise identical. In the AppInbox/AppOnboard Android prototypes, the OTP chip says "from SMS" and there is a typed code field.

- Not drawn: what "Ask my school to add me" does, sign-in when a biometric fails, session expiry, device change, and the exact PIN set-up and reset flow.

CHANNELS · WHATSAPP

WhatsApp channel

"No app? No problem. Just WhatsApp the school." Dhruva answers from the same live Dhruva One data and hands over to a person when it should.

Who uses it. Parents and grandparents, teachers, and support staff (drivers, attendants, guards, housekeeping) who would rather not install the app. School office and HR take over chats in working hours. Campus admin sees a settings card.

On the following pages:

Business info sheet (Parent, Teacher, Staff) (opens from the header) · What the board says · Opening and main menu · Topic flows (every conversation) · What the bot understands (typed text) · Composer controls · Rules and edge cases (Parent) · Opening and menu · Flows · What the bot understands (typed text) · Composer controls (Teacher) · Rules and edge cases (Teacher) · Language choice · Menu rows (English / Hindi) · Flows · Voice notes (mic flow) · What the bot understands (typed text) · Composer controls (Staff) · Rules and edge cases (Staff)

Business summary

Many families, teachers and support staff already live on WhatsApp and will not install another app. The school gives them one verified green-tick number. They message "Hi" and get a short menu, tap what they need, and get answers from live school data. No password and no sign-in: the phone number is the key, matched against school records.

Parents get attendance, fees (paid by UPI inside the chat, with PDF receipts), homework, live bus location, exam date sheet and report cards, leave requests, and the school calendar. Teachers can mark attendance, post homework, see which students need help, apply for leave, open their payslip, and, most strikingly, send a photo of the paper register or marks sheet and have Dhruva read it and publish it. Support staff get payslips (behind a 4-digit PIN), leave, attendance, duty, holidays and salary advance in Hindi or English, by text or by voice note.

The school can also message first with short, pre-approved alert templates (attendance, bus, fee reminder, circular, attendance reminder for teachers, leave approved, salary credited, duty reminder). Anything that needs a person is handed to the front office or HR during working hours. Every action lands in the same approval and audit trail as the app.

Daily story (what Dhruva surfaces first)

- **Parent (Pooja):** Yesterday's alerts sit above the chat: "Attendance: Vivaan Sharma reached school at 7:48 am and was marked present" and "Bus 12 dropped Vivaan at DLF Phase 4, Galleria at 2:20 pm". She says "Hi" and Dhruva greets her by name and child: "Namaste Pooja. I'm Dhruva, the DPS Gurugram assistant. What would you like to know about Vivaan (Class 5–B)?" with one button, "Choose a topic". Hint under the phone: tap "Choose a topic", a reply button, or type "where is the bus?".
- **Teacher (Ms. Batra):** At 8:05 am the school's template arrives: "Attendance reminder: Class 5–B attendance is not marked yet. Reply Hi, or just send a photo of your register." Dhruva's reply to "Hi" repeats this and invites a photo. The hint says: tap the paperclip and pick a photo of your register, marks sheet or notes. Yesterday's message was "Homework sent: Your Maths worksheet reached 34 of 36 parents of 5–B."
- **Staff (Suresh):** At 6:00 am a bilingual "Duty reminder: Route 12 morning pickup starts at 6:30 am. Have a safe drive!" (Hindi line below the English). Yesterday: "Salary credited:... September salary of Rs 21,450 has been credited to SBI ••4821" (English plus Hindi, signed "DPS Gurugram HR"). On "Namaste" Dhruva asks for a language: buttons "हिंदी" and "English". Everything after follows that choice.

Chat anatomy (shared by all three prototypes)

- **Header (WhatsApp look, green):** back arrow, school logo, "DPS Gurugram" with a verified tick, subtitle "Official school account", video-call icon, voice-call icon, three-dot menu. Staff board shows "typing..." in the subtitle while Dhruva composes.

- **Banner at top of chat:** "This business uses a secure service from Meta to manage this chat. Tap to learn more." Tapping the header or banner opens a "Business info" sheet (see below).
- **Message types the bot sends:** plain text with bold, a message with a bold header line (templates), a footer line, one to three reply buttons (each button echoes as the user's own message when tapped), a "list" button that opens a bottom sheet of radio rows plus a Send button, a call-to-action link button (for example "Pay Rs 9,600 by UPI"), a flow button that opens a short form sheet (for example "Mark absentees", "Enter PIN"), a PDF document card (name, pages, size), a live location card (map, "LIVE" badge), and system lines ("Connecting you to the school office…").
- **Message types the user sends:** typed text, tapped buttons, list picks, form submissions, photos (teacher), voice notes (staff). Double blue ticks show on sent messages. A typing indicator and a short delay precede every bot reply (about 0.7 to 0.9 s).
- **Composer:** emoji, text box "Message", paperclip (Attach), camera, green mic (voice).
- **Tip bubble:** a dismissible "Try it:..." hint over the composer ("Hide tip").
- **Prototype-only controls:** restart-demo control, toasts. These are demo aids, not product features.

Business info sheet (Parent, Teacher, Staff) (opens from the header)

- Parent: "Messages come only from the verified DPS Gurugram number"; "Works only for mobile numbers registered with the school"; "Fees are paid by UPI. Dhruva never asks for your PIN or OTP"; "Office staff join the chat Mon to Sat, 8 am to 4 pm"; "Type STOP at any time to stop school alerts". Footer: "This is a demo of the Dhruva One WhatsApp channel".
- Teacher: "Teacher numbers are checked against school records"; "Photos of registers, marks and notes are read by Dhruva and published for you"; "Attendance and homework go to the same place as the app"; "Leave requests go to the Principal"; "Payslips open only with your 4-digit PIN"; "The office joins the chat Mon to Sat, 8 am to 4 pm"; STOP line.
- Staff: "Staff numbers are checked against HR records"; "Payslips are protected with your 4-digit PIN"; "Leave and advance requests go straight to your manager"; "HR joins the chat Mon to Sat, 9 am to 5 pm"; "Works in English and हिंदी, by text or voice note".

---

channel overview (the channel as a product)

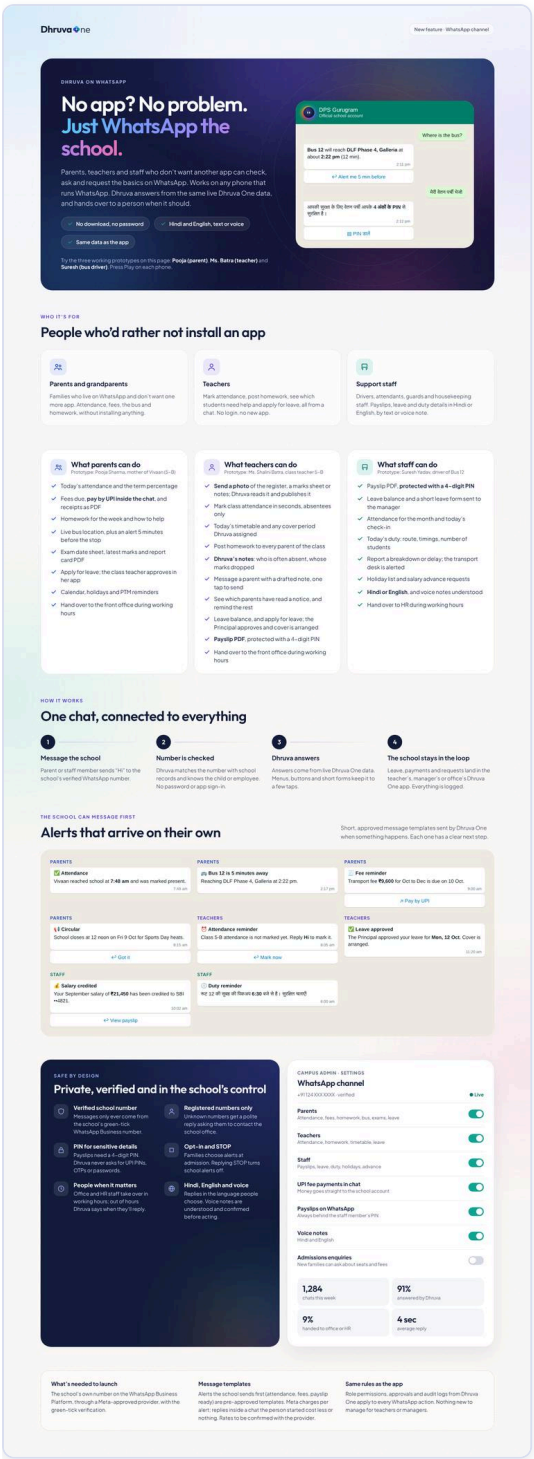

Phone · Full

What the board says

- **Hero:** "New feature · WhatsApp channel · DHRUVA ON WHATSAPP · No app? No problem. Just WhatsApp the school." Sub-copy: parents, teachers and staff who don't want another app can check, ask and request the basics. Works on any phone that runs WhatsApp. Three tick lines: "No download, no password", "Hindi and English, text or voice", "Same data as the app". Instruction: try the three working prototypes (Pooja, Ms. Batra, Suresh), "Press Play on each phone". A sample exchange is shown: "Where is the bus?" -> "Bus 12 will reach DLF Phase 4, Galleria at about 2:22 pm (12 min)." with button "Alert me 5 min before"; and a Hindi payslip request "मेरी वेतन पर्ची भेजो" -> "आपकी सुरक्षा के लिए वेतन पर्ची आपके 4 अंकों के PIN से सुरक्षित है ।" with button "PIN डालें".
- **Who it's for:** "People who'd rather not install an app": Parents and grandparents; Teachers; Support staff.
- **What parents can do** (prototype Pooja Sharma): today's attendance and term percentage; fees due, pay by UPI inside the chat, receipts as PDF; homework for the week and how to help; live bus location plus an alert 5 minutes before the stop; exam

date sheet, latest marks and report card PDF; apply for leave (class teacher approves in her app); calendar, holidays and PTM reminders; hand over to the front office during working hours.

- **What teachers can do** (prototype Ms. Shalini Batra): send a photo of the register, a marks sheet or notes (Dhruva reads and publishes it); mark class attendance in seconds, absentees only; today's timetable and any cover period Dhruva assigned; post homework to every parent of the class; Dhruva's notes (who is often absent, whose marks dropped); message a parent with a drafted note in one tap; see which parents have read a notice and remind the rest; leave balance and apply for leave (Principal approves, cover arranged); payslip PDF protected with a 4–digit PIN; hand over to the front office.
- **What staff can do** (prototype Suresh Yadav): payslip PDF behind a 4–digit PIN; leave balance and a short leave form sent to the manager; attendance for the month and today's check-in; today's duty (route, timings, number of students); report a breakdown or delay (transport desk alerted); holiday list and salary advance requests; Hindi or English, voice notes understood; hand over to HR during working hours.
- **How it works (4 steps):** 1 Message the school: send "Hi" to the school's verified WhatsApp number. 2 Number is checked: Dhruva matches the number with school records and knows the child or employee, with no password or app sign-in. 3 Dhruva answers: from live Dhruva One data, using menus, buttons and short forms to keep it to a few taps. 4 The school stays in the loop: leave, payments and requests land in the teacher's, manager's or office's Dhruva One app, and everything is logged.
- **"The school can message first" alert templates** (each has a clear next step):
- Parents: "Attendance: Vivaan reached school at 7:48 am and was marked present." (7:49 am); "Bus 12 is 5 minutes away: Reaching DLF Phase 4, Galleria at 2:22 pm." (2:17 pm); "Fee reminder: Transport fee Rs 9,600 for Oct to Dec is due on 10 Oct." with button "Pay by UPI" (9:00 am); "Circular: School closes at 12 noon on Fri 9 Oct for Sports Day heats." with button "Got it" (8:15 am).
- Teachers: "Attendance reminder: Class 5–B attendance is not marked yet. Reply Hi to mark it." with "Mark now" (8:05 am); "Leave approved: The Principal approved your leave for Mon, 12 Oct. Cover is arranged." (11:20 am).
- Staff: "Salary credited: Your September salary of Rs 21,450 has been credited to SBI ••4821." with "View payslip" (10:02 am); "Duty reminder" in Hindi: "रूट 12 की सुबह की पिकअप 6:30 बजे से है । सुरक्षित चलाएँ!" (6:00 am).
- **"Safe by design" (6 rules):** Verified school number (messages only from the green-tick WhatsApp Business number); Registered numbers only (unknown numbers get a polite reply asking them to contact the school office); PIN for sensitive details (payslips need a 4–digit PIN; Dhruva never asks for UPI PINs, OTPs or passwords); Opt-in and STOP (families choose alerts at admission; replying STOP turns school alerts off); People when it matters (office and HR take over in working hours; out of hours Dhruva says when they'll reply); Hindi, English and voice (replies in the language people choose; voice notes are understood and confirmed before acting).
- **"Campus admin · Settings" card, "WhatsApp channel":** number shown as "+91 124 XXX XXXX · verified" with a green "Live" status. Rows: Parents (Attendance, fees, homework, bus, exams, leave); Teachers (Attendance, homework, timetable, leave); Staff (Payslips, leave, duty, holidays, advance). Four toggles shown on: "UPI fee payments in chat" (money goes straight to the school account), "Payslips on WhatsApp" (always behind the staff member's PIN), "Voice notes" (Hindi and English), "Admissions enquiries" (new families can ask about seats and fees). Usage tiles (sample): 1,284 chats this week; 91% answered by Dhruva; 9% handed to office or HR; 4 sec average reply.
- **What's needed to launch:** the school's own number on the WhatsApp Business Platform, through a Meta-approved provider, with the green-tick verification. **Message templates:** alerts the school sends first (attendance, fees, payslip ready) are pre-approved templates; Meta charges per alert, replies inside a chat the person started cost less or nothing; rates to be confirmed with the provider. **Same rules as the app:** "Role permissions, approvals and audit logs from Dhruva One apply to every WhatsApp action. Nothing new to manage for teachers or managers."
- Note: "Admissions enquiries" is shown as a toggle only. No admissions conversation is built in the prototypes.

---

parent prototype (Pooja Sharma, parent of Vivaan, 5-B)

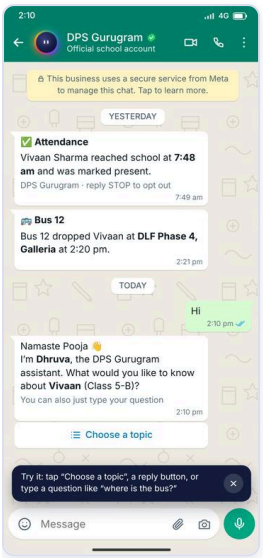

Phone · Start

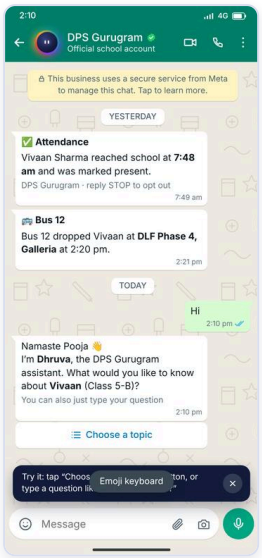

Phone · Emoji

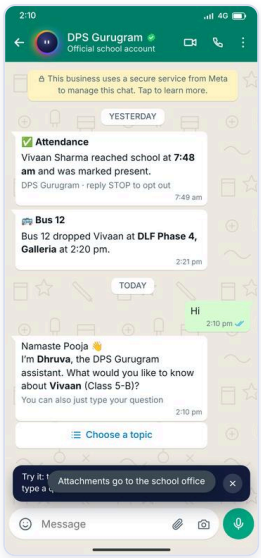

Phone · Attach

Opening and main menu

- Conversation starts with two school alerts under "YESTERDAY", then "TODAY": user "Hi", Dhruva menu message with footer "You can also just type your question" and a list button "Choose a topic".
- "Choose a topic" opens the sheet "What do you need?" with 8 radio rows and a "Send" button (disabled, helper "Tap one option, then Send"). Rows (title, subtitle):

1. "Today's attendance": Present or absent, and this term
2. "Fees and receipts": What is due, pay by UPI, receipts
3. "Homework": Tasks set this week
4. "Where is the bus?": Live location of Bus 12
5. "Exams and results": Date sheet and latest marks
6. "Apply for leave": Tell the class teacher
7. "School calendar": Holidays, events and PTM
8. "Talk to the school office": Mon to Sat, 8 am to 4 pm

- Picking a row then "Send" echoes the row title as the parent's message, then Dhruva replies. The close (X) dismisses the sheet. After each answer a "Main menu" button returns to the list ("What else can I help you with?").

Topic flows (every conversation)

- **Today's attendance:** "Vivaan was marked Present today at 7:48 am. This term: 96% attendance (2 days absent)." Buttons: "Apply for leave", "Main menu".
- **Fees and receipts:**
- Unpaid state: header "Fees for Vivaan", "Transport fee (Oct to Dec): Rs 9,600, due 10 Oct / Tuition fee: paid till December". Link button "Pay Rs 9,600 by UPI". Second message "Need a receipt for an earlier payment?" with "Last receipt", "Main menu".
- "Pay Rs 9,600 by UPI" opens a bottom sheet "Pay DPS Gurugram": "Transport fee · Oct to Dec · Bus 12", amount Rs 9,600, text "Pay with any UPI app. Money goes straight to DPS Gurugram. Order RC-30513", four app rows each with a "Pay" action: Google Pay, PhonePe, Paytm, BHIM UPI; footer "Secured by UPI · NPCI". Tapping an app shows a brief paying state (about 1.4 s), closes, and echoes "Paid Rs 9,600 with Google Pay".
- Then: header "Payment received": "Rs 9,600 for transport (Oct to Dec). Thank you, Pooja! Your receipt is below." plus PDF card "Receipt_RC-30513_Transport.pdf" (1 page · 48 kB · PDF) and "Main menu".
- After payment, asking Fees again says "All fees are paid. Tuition: paid till December / Transport: paid till December" with "Latest receipt" and "Main menu".
- "Last receipt" (before paying) returns "Receipt_RC-29877_Tuition_Jul-Sep.pdf" (1 page · 51 kB) "Tuition fee, Jul to Sep · paid 2 Jul".
- Tapping a PDF card shows the toast "Opening <file name>" (prototype only; real file open is implied).
- **Homework:** header "Homework this week": "1. Maths: times tables worksheet, due tomorrow / 2. English: read chapter 4, due Fri 9 Oct / Set by Ms. Shalini Batra". Buttons "How can I help him?" and "Main menu". "How can I help him?" returns a tip: "Ten minutes a day on the 7, 8 and 9 times tables will help Vivaan most. Try saying them aloud on the way to school".

- **Where is the bus?:** a live location card "Bus 12 · live location, Near Sector 29 · updated 1 min ago" with a "LIVE" badge, then "Bus 12 will reach DLF Phase 4, Galleria at about 2:22 pm (12 min). Driver: Suresh Yadav · Attendant: Kamla Devi". Buttons "Alert me 5 min before" and "Main menu". "Alert me 5 min before" replies "Done. I'll message you when Bus 12 is 5 minutes away." and, after about 4 seconds in the prototype, the template arrives: header "Bus 12 is 5 minutes away": "Reaching DLF Phase 4, Galleria at 2:22 pm. Please be at the stop."
- **Exams and results:** header "Term 1 assessments": "Start Mon 19 Oct · 4 subjects / Latest result, Unit test 2: English A1, Maths B1"; then PDF "Term1_Datesheet_Class5B.pdf" (2 pages · 84 kB) with buttons "Send report card", "Main menu". "Send report card" returns PDF "ReportCard_UT2_Vivaan_Sharma.pdf" (2 pages · 112 kB) "Unit test 2 report card with teacher remarks".
- **Apply for leave (guided):** "Sure. Which day will Vivaan miss school?" with three buttons: "Tomorrow, 7 Oct", "Fri, 9 Oct", "Other dates". "Other dates" opens a form sheet "Leave for Vivaan" ("Choose the days Vivaan will be away. Ms. Batra will see this straight away.") with two chip rows From and To, each offering Wed 7 Oct, Thu 8 Oct, Fri 9 Oct, Mon 12 Oct; submit "Continue"; validation message "Please choose both dates." A single day shows as "Leave: <day>", a range as "<from> to <to>". Then "And the reason?" with buttons "Unwell", "Family function", "Other". Result: "Leave request sent to Ms. Shalini Batra (class teacher) for <day>. I'll tell you here when she replies." After about 4.5 seconds in the prototype: header "Leave approved": "Ms. Shalini Batra approved Vivaan's leave for <day>." (adds "Get well soon, Vivaan!" when the reason is Unwell) with footer "Homework for the day will be shared here". This shows the loop: the teacher approves in her app and the answer returns to WhatsApp.
- **School calendar:** header "Coming up": "Fri 9 Oct: Sports Day heats, wear house colours / 20 to 24 Oct: Diwali break / Sat 31 Oct: Parent-teacher meeting, 9 am to 12 pm". Buttons "Remind me about the PTM", "Main menu". Reminder reply: "Done. I'll remind you on Fri 30 Oct with Vivaan's teachers and time slot."
- **Talk to the school office (hand-over):** system line "Connecting you to the school office…", then a human message "Anita · Front office: Hello Mrs. Sharma, this is Anita from the DPS Gurugram front office. How can I help you?", then system line "Type MENU at any time to go back to Dhruva". While in this mode, anything typed gets the human reply "Thank you, I've noted this. I'll check with Ms. Batra and call you back by 4 pm today." Typing MENU, Hi, Hello, Hey, Namaste or Start returns to Dhruva's menu and ends the hand-over.

What the bot understands (typed text)

Keyword matching, in this order: bus/where/van/driver -> bus; fee/pay/receipt/due/money -> fees; attend/present/"absent today" -> attendance; homework/hw/assignment/worksheet -> homework; exam/result/marks/report/test -> exams; leave/absent/sick/"holiday for" -> leave; ptm/calendar/holiday/event/diwali/sports -> calendar; office/call/talk/teacher/complain -> office. Greetings (menu, hi, hello, hey, namaste, start) show the menu. Anything else: "I don't have an answer for that yet. Shall I ask the school office for you?" with buttons "Ask the office" and "Main menu".

Composer controls

- Emoji: toast "Emoji keyboard" (no real keyboard in the prototype).
- Paperclip and camera: toast "Attachments go to the school office". Parents cannot send photos to Dhruva; attachments are described as going to the office.
- Mic: toast "Hold to record a voice message". No voice flow is built for parents (voice is built for staff).
- Voice call icon: toast "Calls go to the school office during working hours". Back arrow: toast "Chats list is not part of this demo". Video call: not wired to a flow.

Rules and edge cases (Parent)

- Works only for mobile numbers registered with the school; the child is known from the number (here "Vivaan (Class 5–B)"). Multiple children are not shown in the prototype.
- Fees are paid by UPI only. Dhruva never asks for UPI PIN or OTP.
- Office hours for hand-over: Mon to Sat, 8 am to 4 pm.
- STOP at any time turns school alerts off; alert templates carry "reply STOP to opt out".

teacher prototype (Ms. Shalini Batra, class teacher 5-B)

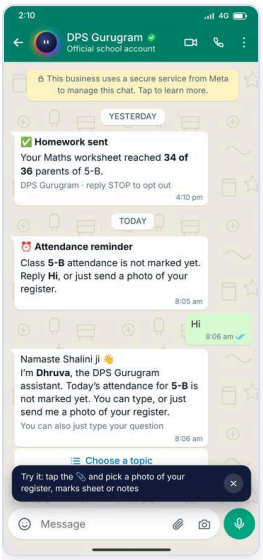

Phone · Start

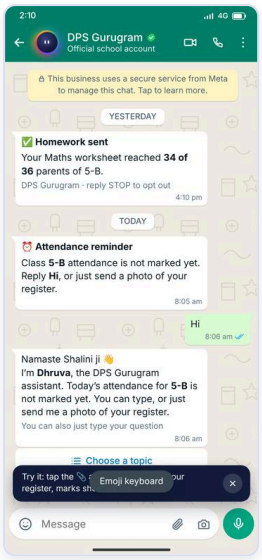

Phone · Emoji

Phone · Attach

Opening and menu

Template "Attendance reminder" (8:05 am), user "Hi", Dhruva: "Namaste Shalini ji. I'm Dhruva, the DPS Gurugram assistant. Today's attendance for 5-B is not marked yet. You can type, or just send me a photo of your register." and "Choose a topic". List title "What do you need?" with 8 rows:

1. "Mark attendance": Class 5-B, today
2. "Send a photo": Attendance, marks sheet or notes
3. "My timetable": Today's periods and cover
4. "Post homework": Sent to parents of 5-B
5. "Who needs help?": Dhruva's notes on your class
6. "Apply for leave": Balance, and approval by the Principal
7. "My payslip": Protected with your 4-digit PIN
8. "Talk to the office": Front office, Mon to Sat

Flows

- **Mark attendance (absentees only):** "Class 5-B · 36 students. Tell me who is absent. Everyone else is marked present." with flow button "Mark absentees". It opens a form sheet "Absent today · 5-B" ("Choose the student who is absent. You can send this again to add more."), field "Absent student" as chips: "Nobody is absent", "Kabir Arora", "Diya Verma", "Aarav Jain"; submit "Submit attendance"; validation "Please choose an option." Echo "Absent: Kabir Arora" (or "All present"). Result header "Attendance submitted": "35 present, 1 absent in 5-B. Parents of Kabir Arora have been messaged." footer "Saved in Dhruva One", "Main menu". If "Nobody is absent": "36 of 36 present in 5-B." If already done today: "Already done today. 35 present, 1 absent (Kabir Arora)." The form selects one absentee per submission (text says it can be sent again to add more).
- **Send a photo (the headline feature):** "Send a photo from your gallery: an attendance register, a marks sheet or your notes and learning plan. I read it and publish it for you. No typing needed." with flow button "Open gallery". The paperclip and camera icons in the composer open the same gallery directly. The gallery sheet "Recent photos" shows six thumbnails, "Pick a photo of your register, marks sheet or notes. Dhruva will read it.", button "Send" (disabled until a photo is picked), footer "Dhruva reads the photo and tells you what it found". Thumbnails are captioned: Photo, Attendance register, Photo, Marks sheet, Notebook page, Photo.
- Pick "Attendance register": the photo appears as her message, Dhruva says "Got it. This looks like an attendance register for 5-B. Reading it…", then (about 3 s) header "Attendance published": "5-B · today / 35 present, 1 absent (Kabir Arora) / Kabir's parents have been messaged." footer "Read from your photo · saved in Dhruva One", buttons "Undo", "Main menu".
- Pick "Marks sheet": "Marks published: Maths · Unit test 2 · 5-B / 36 students read, out of 25 / Class average 18.4, highest 24. / Each parent sees only their own child's marks."
- Pick "Notebook page": "Learning plan published: Maths · week of 12 Oct · 5-B / Mon: Equivalent fractions / Wed: Adding fractions / Fri: Worksheet 7 and a short quiz / Students and parents can see it in the app and on WhatsApp."
- Pick a plain "Photo": "I couldn't find an attendance register, marks sheet or notes in this photo. Could you send a clear photo of the page?" with "Choose another photo", "Main menu".

- "Undo": "Done, I've taken that back. Parents can no longer see it. You can send a clearer photo any time." with "Send another photo". Undo also resets "attendance done today".
- Dhruva states what it recognised before reading ("This looks like...") so the teacher can catch a wrong guess; every result is labelled as read from the photo. No line-by-line confirmation step is shown before publishing, only Undo afterwards.
- **My timetable:** header "Friday 9 Oct": "1 · 7–C Maths / 2 · 5–B Maths / 3 · 6–A Maths / 4 · Cover: 6–D for Mr. Sandeep Bedi (set by Dhruva) / 5 · 5–B Class period / 6 · 8–B Maths". Buttons "Can't take the cover?" and "Main menu". "Can't take the cover?" replies "Okay. I've asked Dhruva to find another free teacher for 6–D, Period 4. I'll confirm here."
- **Post homework:** form sheet "Post homework · 5–B" ("Parents of 5–B get this on WhatsApp or in the app."). Fields: Subject chips (Maths, English, Hindi, Science), Task (free text, placeholder "Worksheet 5, Q1 to 10"), Due chips (Tomorrow, Mon 12 Oct, Wed 14 Oct). Submit "Send to parents"; validation "Please fill all three." Echo "<Subject> · <task> · due <due>". Reply "Sent to the parents of 5–B (36 families). <Subject>: <task>, due <due>." After about 4.5 s: header "Read by 34 of 36": "Your <Subject> homework has been read by 34 parents. 2 have not opened it yet." buttons "Remind the 2", "Main menu". "Remind the 2": "Done. I've sent a gentle reminder to the 2 parents."
- **Who needs help?:** header "Dhruva's notes · 5–B": "Kabir Arora: absent 3 of the last 5 days / Myra Singh: Maths Unit test 2 dropped from B1 to C1 / Diya Verma: 4 late arrivals this month", footer "Based on attendance and marks in Dhruva One". Buttons "Message Kabir's parents", "Main menu". "Message Kabir's parents" shows a drafted note: "Dear Mr. Arora, Kabir has missed 3 of the last 5 days. Is everything okay? Please tell us if we can help. – Ms. Batra, 5–B" with "Send it" and "Cancel". "Send it": "Sent to Kabir's parents. I'll show their reply here." and after about 4.5 s the parent's reply is relayed: "Mr. Arora (parent): Thank you, ma'am. Kabir had a fever. He will be back on Monday."
- **Apply for leave:** "Your leave balance: Casual 7 · Sick 5 · Earned 12 days. Which day do you need leave?" buttons "Mon, 12 Oct", "Tue, 13 Oct"; then "And the reason?" buttons "Unwell", "Personal", "Training". Result: "Leave request for <day> sent to Ms. Neelam Mehra (Principal). I'll tell you here when it is approved." After about 4.5 s: header "Leave approved": "Ms. Neelam Mehra (Principal) approved your leave for <day>. Dhruva arranged cover for 5–B Maths: Mr. Sandeep Bedi." footer "Your class has been informed".
- **My payslip:** if no PIN entered yet: "Your payslip is protected. Please enter your 4–digit PIN to open it." with flow button "Enter PIN". Sheet "Enter your PIN" ("Dhruva never asks for this PIN anywhere else."), masked numeric field "4–digit PIN", submit "Open payslip", validation "Please enter 4 digits." Echo "PIN entered". Then PDF "Payslip_Sep2026_Shalini_Batra.pdf" (1 page · 64 kB): "September 2026 / Gross Rs 58,000 · Deductions Rs 7,420 / Net pay Rs 50,580, credited on 1 Oct to HDFC ••2290", buttons "Previous month", "Main menu". "Previous month": "Payslip_Aug2026_Shalini_Batra.pdf", "August 2026 · Net pay Rs 50,580". Once the PIN is entered in the chat session, later requests skip the PIN. The prototype accepts any 4 digits; the real PIN check and any re-prompt or timeout policy are not shown.
- **Talk to the office:** same hand-over as parent, "Anita · Front office: Hello Ms. Batra, this is Anita from the front office. How can I help you?"; typed messages get "Noted, ma'am. I'll check and call you back by 4 pm today." MENU returns to Dhruva.

What the bot understands (typed text)

photo/picture/upload/gallery/marks/learning plan/lesson plan/notes -> send a photo; attend/present/absent -> attendance; timetable/period/schedule/cover -> timetable; homework/hw/worksheet -> homework; help/struggle/flag/who/weak -> who needs help; leave/sick/off/balance -> leave; payslip/salary/pay stub/वेतन -> payslip; office/call/talk -> office. Unknown: "I don't have an answer for that yet. Shall I ask the school office for you?" with "Ask the office".

Composer controls (Teacher)

Paperclip and camera both open the "Recent photos" gallery. Mic toast "Hold to record a voice message" (no voice flow). Emoji toast "Emoji keyboard".

Rules and edge cases (Teacher)

- Teacher numbers are checked against school records. Attendance and homework go to the same place as the app. Leave goes to the Principal. Payslips need the 4–digit PIN. Parents see only their own child's marks. Office hours Mon to Sat, 8 am to 4 pm.
- Teacher templates: "Homework sent: reached 34 of 36 parents" (delivery summary), "Attendance reminder" (8:05 am) and "Leave approved".

staff prototype (Suresh Yadav, driver of Bus 12; Hindi and English, voice)

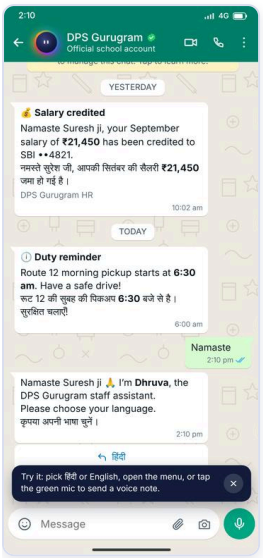

Phone · Start

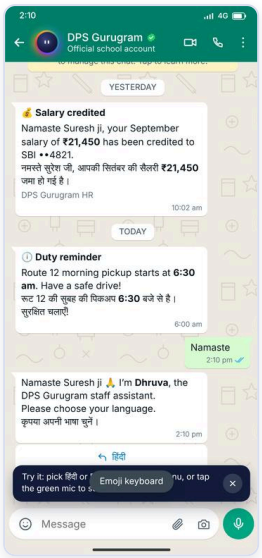

Phone · Emoji

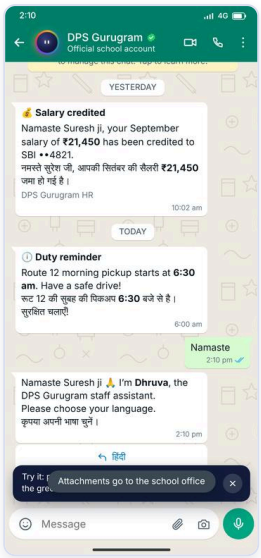

Phone · Attach

Language choice

After "Namaste" Dhruva says "Namaste Suresh ji. I'm Dhruva, the DPS Gurugram staff assistant. Please choose your language. कृपया अपनी भाषा चुनें।" with two buttons "हिंदी" and "English". The choice sets language for all later replies, buttons and form labels (the whole interface, not just the text, switches: list titles, validation messages, send buttons). Typing "Hindi/हिंदी" or "English" later also switches. Then: "How can I help you today, Suresh ji?" (Hindi: "सुरेश जी, आज मैं आपकी क्या मदद करूँ?") with footer "You can also type or send a voice note" and list button "Open menu" ("मेनू खोलें"). List title "Staff services" ("स्टाफ़ सेवाएँ").

Menu rows (English / Hindi)

1. Payslip: Salary slip for any month / वेतन पर्ची
2. Leave balance: Casual, sick and earned / बची हुई छुट्टियाँ
3. Apply for leave: Sent to your manager / छुट्टी के लिए आवेदन
4. My attendance: This month and today / मेरी हाज़िरी
5. Today's duty: Route, timings and students / आज की ड्यूटी
6. Holiday list: 2026–27 school holidays / छुट्टियों की सूची
7. Salary advance: Request up to Rs 10,000 / वेतन अग्रिम
8. Talk to HR: Mon to Sat, 9 am to 5 pm / HR से बात करें

Flows

- **Payslip:** "For your safety, payslips are protected with your 4-digit PIN." button "Enter PIN" (Hindi "PIN डालें"). Sheet "Open your payslip": "Enter the 4-digit PIN you set with HR. Don't share it with anyone." masked numeric field "PIN", button "Open" ("खोलें"), error "Please enter 4 digits." Echo "PIN entered ✓". Reply: PDF "Payslip_Sep2026_Suresh_Yadav.pdf" (1 page · 62 kB): "September 2026 / Gross Rs 24,000 · Deductions Rs 2,550 / Net pay Rs 21,450, credited on 1 Oct to SBI ••4821", buttons "Previous month" (-> "Payslip_Aug2026_Suresh_Yadav.pdf", "August 2026 · Net pay Rs 21,450") and "Main menu". PIN is remembered for the session.
- **Leave balance:** "Casual: 4 days / Sick: 6 days / Earned: 9 days" with buttons "Apply for leave" and "Main menu".
- **Apply for leave:** "Fill in the short form and I'll send it to Vinod Kumar (transport manager)." flow button "Fill leave form". Form "Apply for leave": "Type of leave" chips (Casual, Sick, Earned), "From" and "To" chips (Wed 7 Oct, Thu 8 Oct, Fri 9 Oct, Mon 12 Oct), submit "Send to manager", validation "Please choose the type and both dates." Echo "<type> · <dates>". Reply: "Leave request for <dates> sent to Vinod Kumar. A relief driver will be arranged for Bus 12." After about 4.5 s: header "Leave approved": "Vinod Kumar approved your leave for <dates>. Rakesh will drive Bus 12."
- **My attendance:** "September: present 25 of 26 days / Today: checked in at 6:12 am, Gate 2".
- **Today's duty:** a route card "Route 12 · 14 stops, Starts Sector 45 depot · ends DLF Phase 4" and text "Route 12 · Bus HR-26-AB-1212 / Morning pickup: 6:30 am · 38 students / Afternoon drop: 1:40 pm / Attendant: Kamla Devi". Buttons "Report a problem" and "Main menu". "Report a problem": "What happened?" with "Bus breakdown", "Running late", "Student issue". Any choice: "Transport desk alerted. Vinod Kumar will call you in 2 minutes. Parents on Route 12 will be informed if needed." (all three options give the same reply in the prototype).
- **Holiday list:** "Next holiday: Diwali break, 20 to 24 Oct" plus PDF "Holiday_List_2026-27_DPS_Gurugram.pdf" (1 page · 38 kB).

- **Salary advance:** "You can request up to Rs 10,000. It is recovered from your next salary." button "Request advance". Form "Salary advance": "Amount (Rs)" numeric (placeholder 5000), "Reason" chips (Medical, Family, Education, Other), submit "Send request"; validation "Enter an amount up to Rs 10,000 and choose a reason." Echo "Advance request: Rs <amount>"; reply "Advance request for Rs <amount> sent to HR. You'll get an answer here within 2 working days." (No approval step is shown; it says HR answers in the chat.)
- **Talk to HR:** "Connecting you to HR…", "Priya · HR: Namaste Suresh ji, Priya from HR here. How can I help you?", "Type MENU at any time to go back to Dhruva". While connected, typed text gets "Noted, Suresh ji. I'll check and call you back before 5 pm today." (Hindi version also built.) MENU returns.

Voice notes (mic flow)

- Tapping the green mic (aria "Voice message") records a sample 0:04 voice note shown as a green voice bubble with play button and waveform. The staff board's hint says "tap the green mic to send a voice note".
- Dhruva replies (about 1.2 s) with what it heard and asks for confirmation before acting: "I heard: 'I need leave tomorrow' / Shall I apply casual leave for tomorrow, 7 Oct?" with buttons "Yes, apply" and "No". (Hindi: "मैंने सुना: 'मुझे कल छुट्टी चाहिए'" and "हाँ, आवेदन करें" / "नहीं".)
- "Yes, apply": sends the leave request to Vinod Kumar with the same sent and approved messages as the form flow. "No": "Okay, nothing was sent."
- In the prototype the transcription is a fixed example; real speech recognition accuracy, supported accents and error handling are not shown. Unrecognised input: "Sorry, I didn't understand that. You can open the menu or send a voice note." with "Main menu".

What the bot understands (typed text)

English and Hindi keywords: payslip/salary slip/slip/वेतन/पर्ची/तनख्वाह/सैलरी -> payslip; balance/बची -> leave balance; leave/chhutti/छुट्टी -> apply leave; attendance/हाज़िरी -> attendance; duty/route/ड्यूटी/रूट -> duty; holiday/अवकाश -> holidays; advance/अग्रिम/loan -> advance; hr/talk/बात -> HR. Greetings including नमस्ते and मेनू show the menu.

Composer controls (Staff)

Paperclip and camera: toast "Attachments go to the school office". Emoji toast. Mic: voice flow above.

Rules and edge cases (Staff)

- Staff numbers matched to HR records. Payslips behind a 4–digit PIN (set with HR). Leave and advance go to the manager or HR. HR hand-over Mon to Sat, 9 am to 5 pm.
- Templates sent bilingually (English and Hindi in one message) for the salary alert and duty reminder.
- Hindi first design for a driver: short answers, large buttons, bilingual alerts, voice input.

Escalation to the app and to people (all boards)

- **To a person:** "Talk to the school office" (parents, teachers) and "Talk to HR" (staff). Human agent names shown: "Anita · Front office", "Priya · HR". Working hours: office Mon to Sat, 8 am to 4 pm; HR Mon to Sat, 9 am to 5 pm. Out of hours, per the Overview, "Dhruva says when they'll reply" (the exact out-of-hours message is not drawn). Typing MENU returns control to Dhruva. Unknown questions offer "Ask the office".
- **To the app (the approver's side):** Parent leave is approved by the class teacher "in her app"; teacher leave goes to the Principal ("Dhruva arranged cover"); staff leave and advance go to the transport manager or HR. The WhatsApp prototypes show the approval returning as a template message. Teacher attendance, marks and homework "go to the same place as the app". No screen shows the approver's app view in these boards (see the role boards).
- **Messages that originate from app events:** attendance, bus 5–minute alert, fee reminder, circular, attendance reminder, leave approved, salary credited, duty reminder, homework read counts, and parent reply relayed to the teacher.

Gaps / differences between boards

- Voice notes are built only for staff; parents and teachers get the toast "Hold to record a voice message" even though the Overview says voice notes are supported (Overview toggle "Voice notes: Hindi and English" is school-wide).
- Photo reading is built only for teachers. Parents and staff attachments are described as "go to the school office" (no flow).
- Hindi is built only on the staff prototype; the Overview shows Hindi templates and a Hindi payslip example.
- Overview lists capabilities not drawn in any chat: "See which parents have read a notice and remind the rest" is covered only for homework; "Message a parent with a drafted note" appears only as the Kabir example; "Attendance for the month" for teachers

and "Admissions enquiries" are listed or toggled without a flow; multi-child parents and out-of-hours replies are not drawn.

- Card says "chats this week 1,284" (sample); no analytics screens are drawn.
- Approver-side screens are not part of these boards.

CHANNELS · WEBSITE (DESKTOP AND MOBILE)

B2B website

A single-page-style marketing site ("Learning, reimagined with AI.") that explains DhruvaOne, shows trust and governance, collects demo/pricing/pilot requests, and offers a mobile-number sign-in.

Who uses it. Prospective buyers (school owners, trustees, principals, admins, IT, procurement) and, secondarily, parents/students/staff who need the app or a computer sign-in.

On the following pages:

Global header and footer (every page) | Night / day toggle | "Get the app" card (Parent or student?)

Business summary

The site is B2B-first. It tells a school owner what DhruvaOne covers (nine modules on one student record), who it fits (groups, standalone schools, education businesses), how approvals and data protection work, and how fast they can be live (about two weeks). Every page ends in the same three calls to action: book a 30–minute demo, get pricing, or start a pilot in one campus at no cost. Parents and students are not the audience: a small "Parent or student? Get the app" link opens an app-download card, and "Sign in" lets existing users enter by mobile number.

Page map and navigation (the site has 7 visible pages plus a sign-in flow)

Pages: Home, Product, Solutions (3 tabs: School groups / Standalone schools / Education businesses), Trust, About us, Pricing, Book a demo (the form page), Sign in. **Resources and Customers pages exist in code but are hidden (not in navigation, not linked); intentionally not documented.** A role-tab state ("Group owner, Principal, Teacher, Accounts, Parent") exists in code but no visible section uses it in the current boards.

Global header and footer (every page)

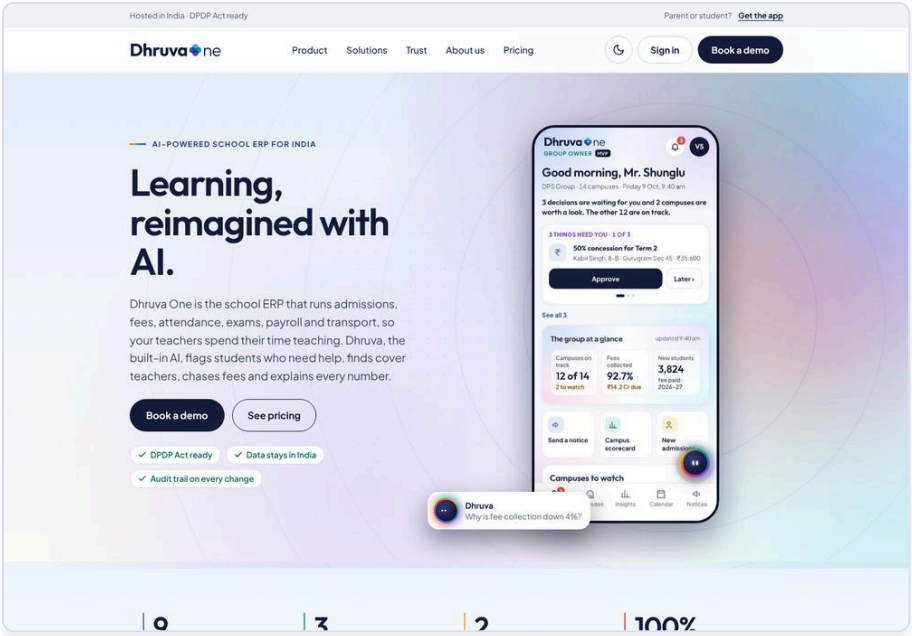

Website · Home 01

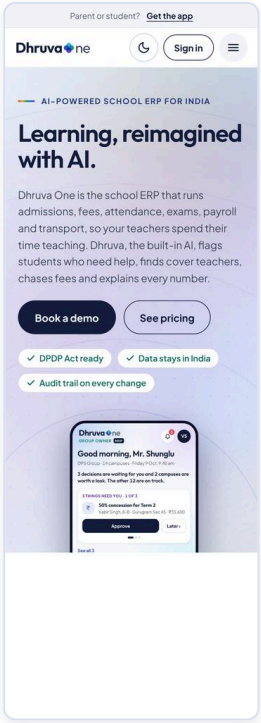

Mobile site · Home 01

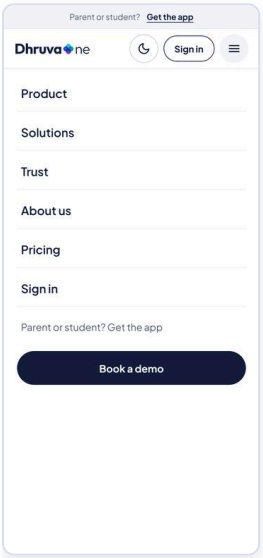

Mobile site · Menu

- Top strip (desktop only): left "Hosted in India · DPDP Act ready"; right "Parent or student?" + underlined "Get the app". On phone only the "Parent or student? Get the app" part is shown.
- Header: logo (click = Home); desktop nav "Product", "Solutions", "Trust", "About us", "Pricing" (current page shown bold with a grey pill); day/night toggle (moon icon, label "Switch to night mode" / "Switch to day mode"); "Sign in" (outlined) -> Sign in page; "Book a demo" (dark) -> demo form. Header is sticky.
- Phone header: logo, night/day toggle, "Sign in", hamburger "Menu". The menu lists Product, Solutions, Trust, About us, Pricing, Sign in, a text link "Parent or student? Get the app" and a full-width "Book a demo". Choosing any item closes the menu and opens that page (page scrolls to top).
- "Pricing" in the nav, "See pricing" and the pricing links open the Pricing page with the form preset to "Get pricing".
- Footer (all pages): logo and line "The calm, intelligent operating system for schools. Made in India."; column Product (Product, Solutions, Pricing, About us, Trust and compliance); column Legal (Privacy notice, Terms, Data processing agreement, Security, Sub-processors, System status) shown as plain text, not clickable; Contact (sales@dhruvaone.in; "Grievance Officer (DPDP Act): grievance@dhruvaone.in"); blue link "Parent or student? Get the app"; "© 2026 DhruvaOne. Gurugram, India." Footer Product-column items are buttons that navigate to those pages.

Night / day toggle

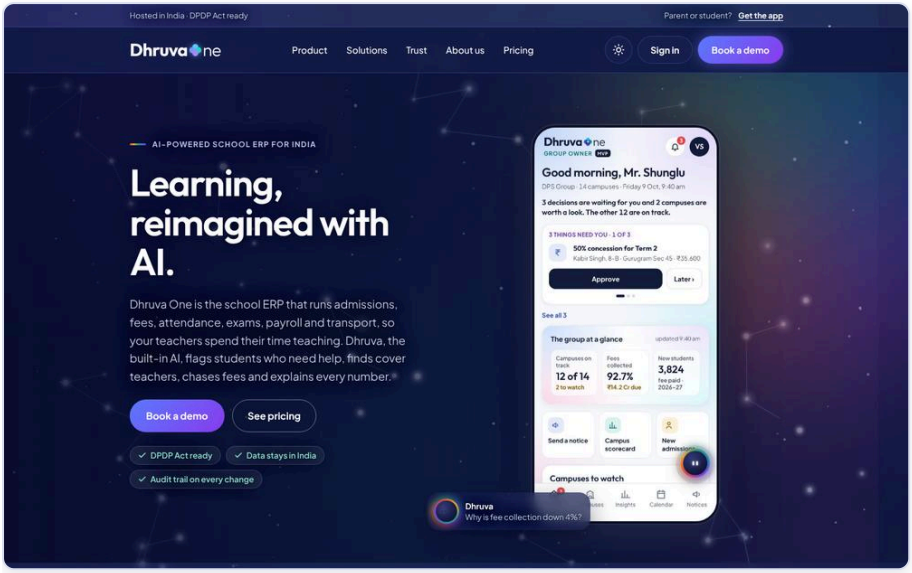

Website · Night mode home

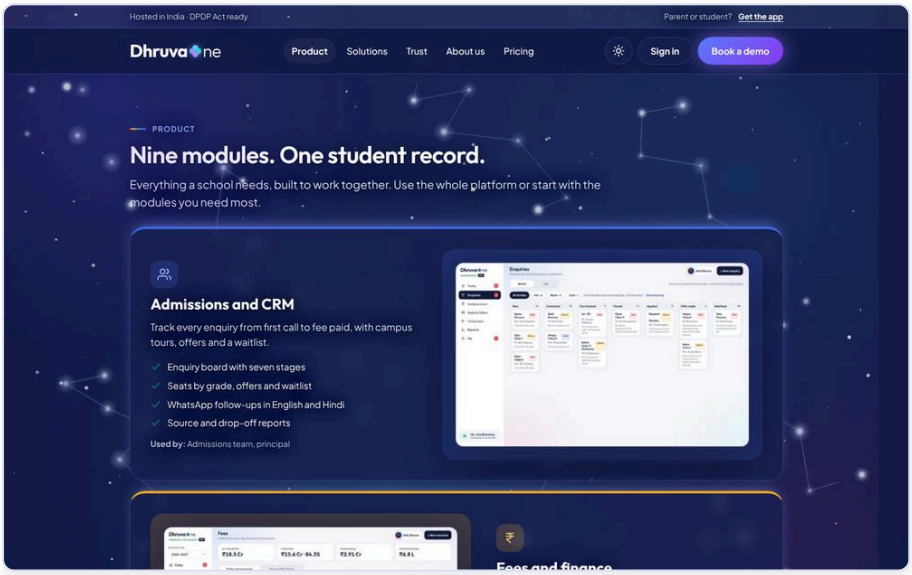

Website · Night mode product

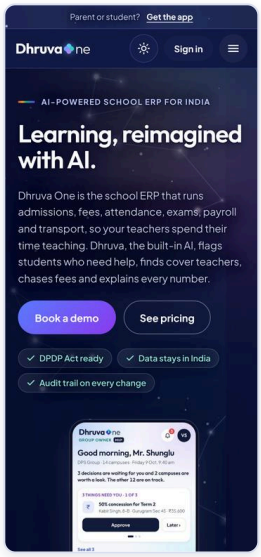

Mobile site · Night mode

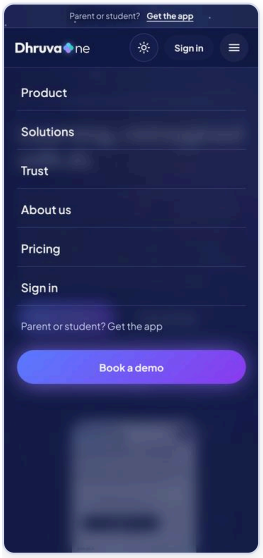

Mobile site · Menu night

- Click the moon: whole site switches to a dark navy theme with star/constellation background; the button label flips to "Switch to day mode". Applies to all pages and persists while navigating (state only; not remembered on reload).

"Get the app" card (Parent or student?)

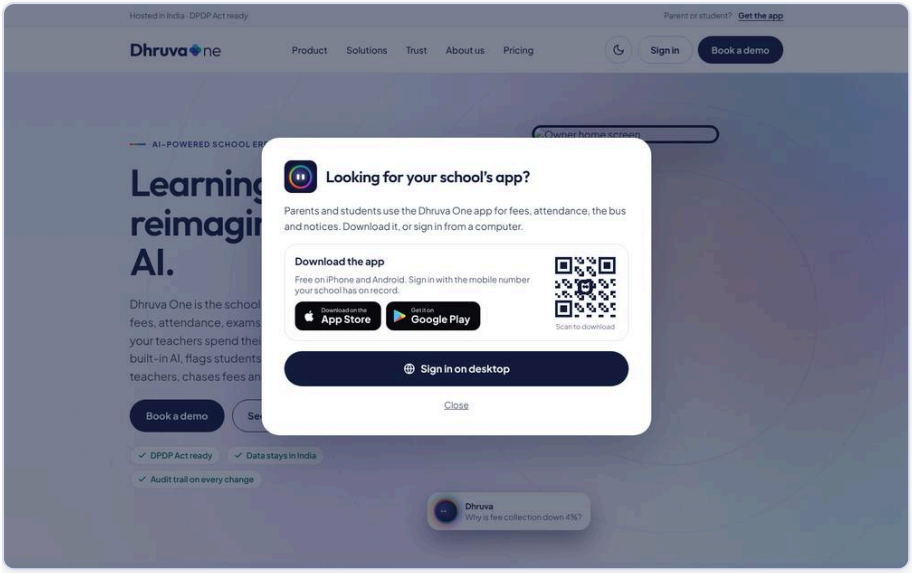

Website · Gate get the app

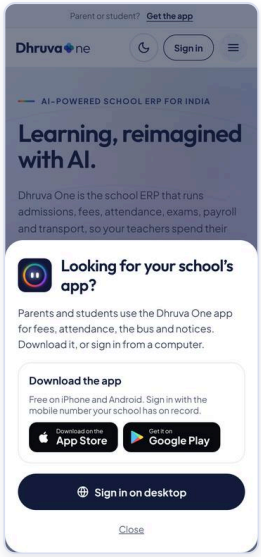

Mobile site · Gate get the app

- Opened from the top strip, the footer link, or the phone menu. A modal over the page: app icon, "Looking for your school's app?", "Parents and students use the Dhruva One app for fees, attendance, the bus and notices. Download it, or sign in from a computer." Panel "Download the app": "Free on iPhone and Android. Sign in with the mobile number your school has on record.", App Store and Google Play badges and a QR labelled "Scan to download" (all decorative; no real links). Buttons: "Sign in on desktop" -> closes and opens the Sign in page; "Close" -> back to the page. Clicking outside also closes.

Home

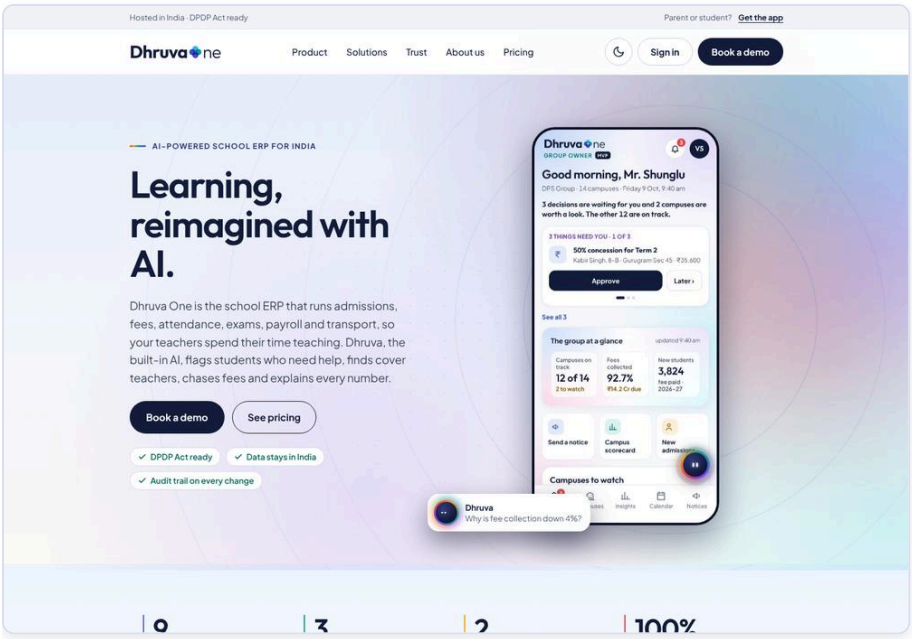

Website · Home 01

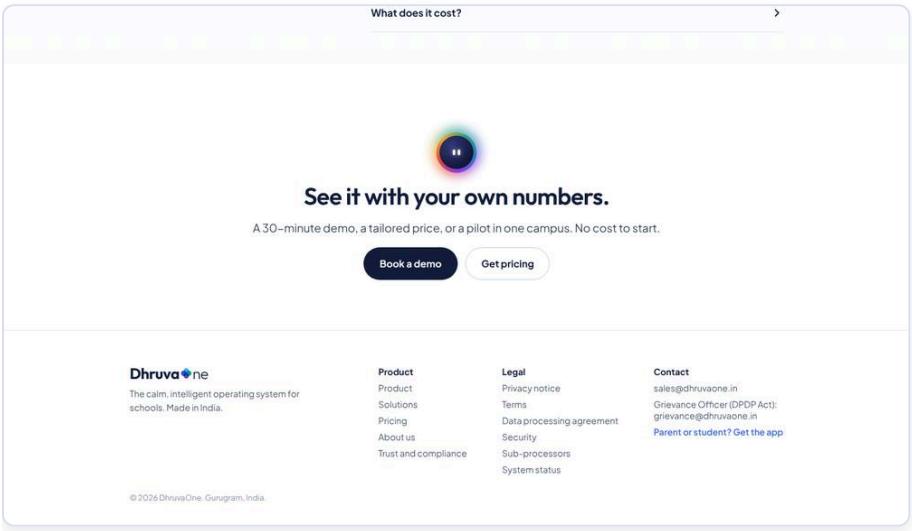

Website · Home 08

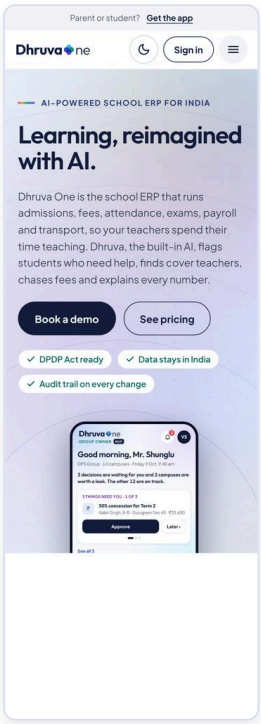

Mobile site · Home 01

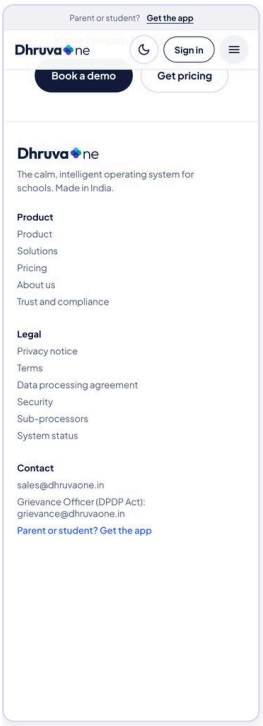

Mobile site · Home 12

1. **Hero.** Eyebrow "AI-POWERED SCHOOL ERP FOR INDIA"; headline "Learning, reimagined with AI."; paragraph (admissions, fees, attendance, exams, payroll, transport; Dhruva flags students who need help, finds cover teachers, chases fees, explains every number). Buttons "Book a demo" -> demo form; "See pricing" -> Pricing page. Three tick chips: "DPDP Act ready", "Data stays in India", "Audit trail on every change". Right side: phone mock of the Group Owner home ("Good morning, Mr. Shunglu", DPS Group, 14 campuses, 3 decisions waiting, 12 of 14 campuses on track, fees collected 92.7%, 3,824 new students) and a floating Dhruva orb card "Why is fee collection down 4%?" (decorative).
2. **Numbers strip.** "9 modules, one student record", "3 ways in: app, web and WhatsApp", "2 languages: Hindi and English", "100% of changes in an audit trail"; then a "Book a demo" button.
3. **WHAT'S INSIDE** "Everything a school runs on, in one place." Nine cards: Admissions and CRM; Fees and finance; Attendance and academics; Exams and results; HR and payroll; Transport; Communication; Parent and student app; Dhruva, the AI assistant. Each has a one-line description and "Explore this module" -> Product page (all nine go to the same Product page, top).
4. **WHO IT'S FOR** "Three kinds of customer. One product that fits each." Cards School groups, Standalone schools, Education businesses, each with "See how it works" -> Solutions page with that tab selected.
5. **ONE RECORD** "School data chaos, replaced by one student record." Three pillars: "Enter it once", "Everyone sees their own view", "Ask Dhruva" (Hindi or English, answers from your own records with the source of every number). A product picture (campus scorecard on desktop) accompanies it.
6. **DHRUVA, THE BUILT-IN AI** "An assistant in every screen, and a person in charge." Eight capability cards: Cover finder, Students who need help, Fee follow-up, Explain a number, Read a marks sheet (teacher sends a photo from WhatsApp; Dhruva reads and publishes), Draft a notice, Admissions assistant, Approvals summary. Statement: "It never changes a record or messages a family on its own. A person approves, and every approval is logged."
7. **GOVERNANCE YOU CONTROL** "You decide who approves what." Two cards: Group (principal approves up to the campus limit; above it the group owner decides); Standalone school (admin runs the day; trustee approves the admin's own items and can read the payroll log).
8. **TRUST AND COMPLIANCE** dark panel "Built for the data of children." with ticks (consent from a parent for every child; access, correction and deletion on request; single sign-on and multi-factor for staff; data export when you leave). Button "See trust and compliance" -> Trust page.
9. **WORKS WITH YOUR TOOLS** "Connects to what your school already uses." Tiles: Payment gateway (UPI and cards), WhatsApp Business (messages and chat), SMS and OTP (sign-in codes and alerts), Accounting export (Tally-ready files), Bus GPS (live location), Biometric attendance (staff and students), Google and Microsoft sign-in (single sign-on), Spreadsheet import (CSV and Excel). Small print: "Sample list for this design. Confirm each integration and its availability before publishing." Note: the MVP scope document places Bus GPS, biometric import and Tally sync in later phases; the website lists them without a "planned" tag.
10. **GETTING STARTED** "From signed to live in about two weeks." Four steps: DAYS 1 TO 2 Set up; DAYS 3 TO 5 Connect; WEEK 2 Train; WEEK 2 ONWARDS Go live ("Campus by campus, with a weekly review and a named support lead").
11. **SEE IT IN ACTION** "See Dhruva work on a real school day." 30-minute walk-through, one screen per role on sample data. Buttons "Book a demo" -> demo form; "Browse the product" -> Product.

12. **QUESTIONS (FAQ)** "Good questions, short answers." Accordion, first item open by default, one open at a time; clicking the open item closes it (arrow rotates). Seven questions: "How long does set-up take?" (about two weeks for one school; groups campus by campus with a weekly review); "Can we bring our existing data?" (yes: students, staff, fee heads and balances imported from spreadsheets and checked before go-live); "Do parents have to download the app?" (no: app, computer sign-in or WhatsApp); "Where is our data stored?" (India region, encrypted, daily backups, exportable); "Who approves what?" (you set limits; principal up to campus limit, above it group owner or trustee; every approval logged); "Does Dhruva make decisions on its own?" (no; drafts and suggests; a person approves anything that changes a record or goes to families); "What does it cost?" (quoted per school or group; a one-campus pilot costs nothing to start). Button "Ask a question" ("Something missing? Ask us and we reply in one working day") -> demo form.
13. **Closing CTA** "See it with your own numbers." "A 30–minute demo, a tailored price, or a pilot in one campus. No cost to start." Buttons "Book a demo" -> demo form (reason Book a demo); "Get pricing" -> demo form with reason "Get pricing".

- Phone: same sections stacked in one column; module and customer cards become full-width stacked cards; the top-strip "Hosted in India" line and desktop nav are replaced by the hamburger.

Product

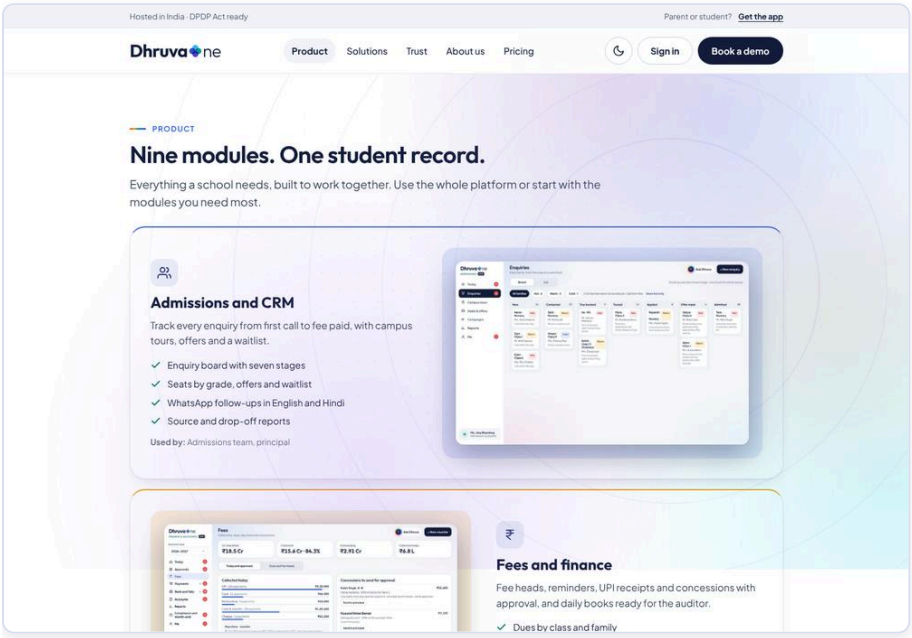

Website · Product 01

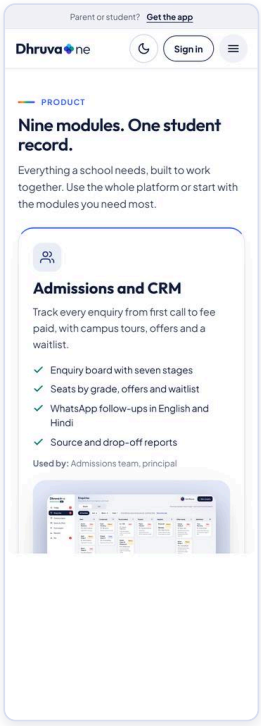

Mobile site · Product 01

- Header "PRODUCT" / "Nine modules. One student record." with a sentence that you can use the whole platform or start with the modules you need.
- Nine module cards, each with four bullet features and a "Used by:" line:
- Admissions and CRM: enquiry board with seven stages; seats by grade, offers and waitlist; WhatsApp follow-ups in English and Hindi; source and drop-off reports. Used by admissions team, principal.
- Fees and finance: dues by class and family; one-tap reminders and receipts; concessions and refunds with approval; vouchers, purchase orders and an audit trail. Used by accounts, principal, owner.
- Attendance and academics: attendance by period or by day; timetable and cover when staff are absent; homework and lesson plans; students who need help flagged early. Used by teachers, coordinators, heads of department.
- Exams and results: exam schedule and seating; marks entry and moderation; report cards ready to publish; parents see results in the app. Used by exam cell, teachers, parents.
- HR and payroll: staff records and documents; leave with balances and approval; monthly salary run and payslips; headcount and vacancies. Used by HR, admin, trustee.
- Transport: routes, stops and seat counts; live bus location for parents; driver app in Hindi and English; transport fee linked to the student. Used by transport in-charge, drivers, parents.
- Communication: notices to a class, campus or the whole group; parent-teacher meeting slots; Hindi and English side by side; see who has read what. Used by everyone.
- Parent and student app: pay fees by UPI and get a receipt; attendance, homework and results; notices and quiet hours; sign in with the number on record. Used by parents, students.

- Dhruva, the AI assistant: explains any number and shows its source; drafts notices and reminders; reads photos of marks sheets; finds cover teachers. Used by everyone.
- Then the same "Dhruva, the built-in AI" block (eight cards) as Home, and the closing CTA ("Book a demo", "Get pricing").
- The module cards are not clickable on this page (no further drill-down).
- Note: "Live bus location for parents" is stated here; the MVP scope has GPS as a Phase 1 pilot and Phase 2 rollout (see platform inventory).

Solutions (three tabs)

- Tab pills at the top: "School groups", "Standalone schools", "Education businesses" (selected = dark pill). Switching is instant and keeps the page position.
- **School groups:** "One view across every campus, with control that stays central." For trusts and chains running 2 to 50 campuses. Four feature cards: Group scorecard (attendance, fees, admissions, staffing per campus on one screen); Central approvals (budgets, hires and fee changes go up the chain with limits); Shared finance and HR (one chart of accounts and one payroll, campus-level access); New campus in days (guided setup, bulk import). "Who approves what": principal approves leave up to 3 days and spend up to the campus limit; group owner approves larger spend and new campuses; group HR decides long leave. "The first two weeks": Week 1 import campuses, staff, fee heads and set limits; Week 2 train principals and finance, go live campus by campus; After: group scorecard starts filling from real data.
- **Standalone schools:** "One simple admin view. No extra roles needed." For schools of 200 to 1,500 students without separate HR, payroll or academic coordinator teams. Cards: Today, one decision at a time (focus card); Attendance and leave (see absentees, approve leave, assign cover in two taps); Fees and simple payroll (remind overdue families in one tap, approve the month); Admissions and notices. Who approves what: admin runs the day; a trustee approves the admin's own leave, salary and fee waivers; trustee can read the payroll and refund log, and nothing else. First two weeks: Day 1 import 500 students and 30 staff; Day 3 logins and first notice; Week 2 first fee reminder and first salary run.
- **Education businesses:** "Coaching chains, preschool franchises and service providers." Cards: A network of centres (fee, royalty and enrolment tracking); Batches and tests; Your own parent app (in your brand, ready for the stores); Audit exports. Who approves what: centre head day-to-day; regional manager fee changes; head office new centres and policy. First two weeks: Week 1 discovery; Weeks 2 to 4 pilot with two centres; After roll out region by region. (The business tab is described only in marketing copy; no product screens for it exist in the design set.)
- Each tab ends with a "Book a demo for this" button -> demo form (reason Book a demo).

Trust

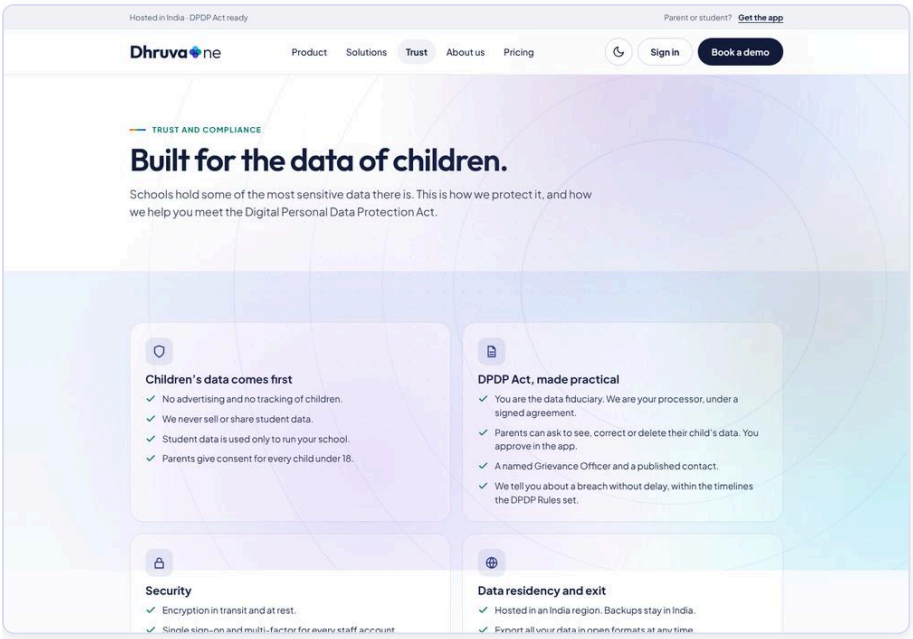

Website · Trust 01

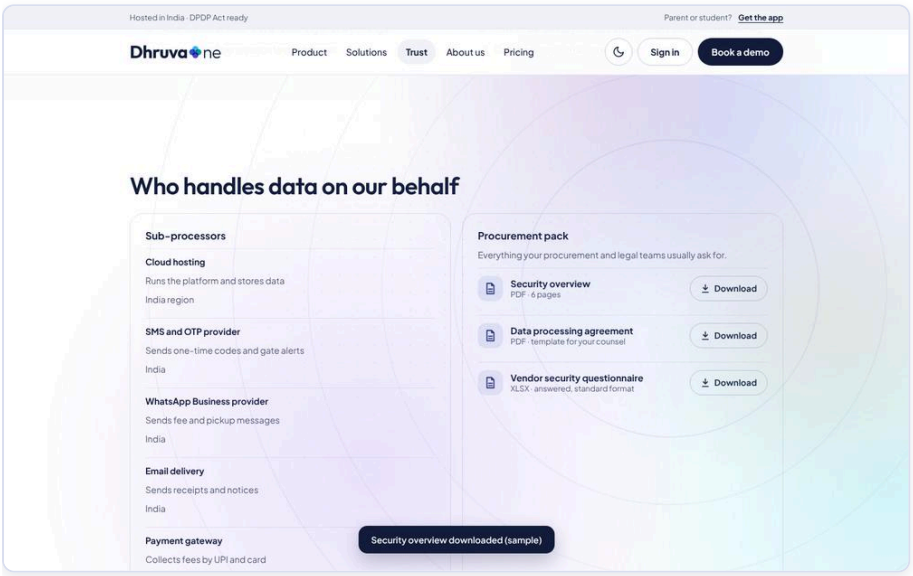

Website · Trust download toast

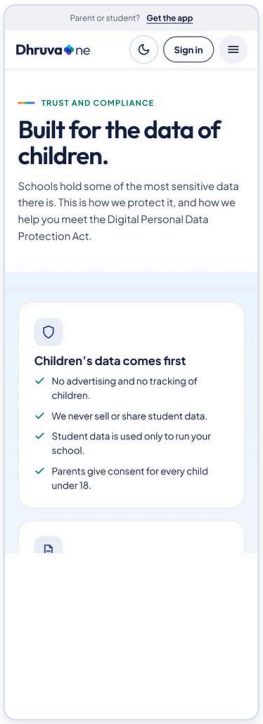

Mobile site · Trust 01

- Header "TRUST AND COMPLIANCE" / "Built for the data of children."
- Four claim blocks: **Children's data comes first** (no advertising or tracking of children; never sell or share student data; used only to run the school; parents give consent for every child under 18). **DPDP Act, made practical** (school is the data fiduciary, DhruvaOne the processor under a signed agreement; parents can ask to see, correct or delete data and the school approves in the app; named Grievance Officer and published contact; breach notice without delay within DPDP Rules timelines). **Security** (encryption in transit and at rest; single sign-on and multi-factor for every staff account; role-based access and an audit log of every change; independent penetration test every year). **Data residency and exit** (India region, backups in India; export all data in open formats at any time; on exit data deleted after 90 days with written confirmation; daily backups with a tested restore).
- **Sub-processors table** "Who handles data on our behalf": Cloud hosting (runs the platform, stores data; India region); SMS and OTP provider (one-time codes and gate alerts; India); WhatsApp Business provider (fee and pickup messages; India); Email delivery (receipts and notices; India); Payment gateway (collects fees by UPI and card; India, PCI DSS).
- **Procurement pack:** "Security overview" (PDF, 6 pages), "Data processing agreement" (PDF, template for your counsel), "Vendor security questionnaire" (XLSX, answered, standard format), each with a "Download" button. Clicking shows a toast for

about 2.6 seconds: "Security overview downloaded (sample)", "Data processing agreement downloaded (sample)", "Vendor security questionnaire downloaded (sample)". No file is produced.

- Small print on page: "Sample claims for this design. Confirm each statement, certification and timeline with your legal and security teams before publishing." No named certification (ISO, SOC) is claimed; "PCI DSS" is shown only against the payment gateway.

About us

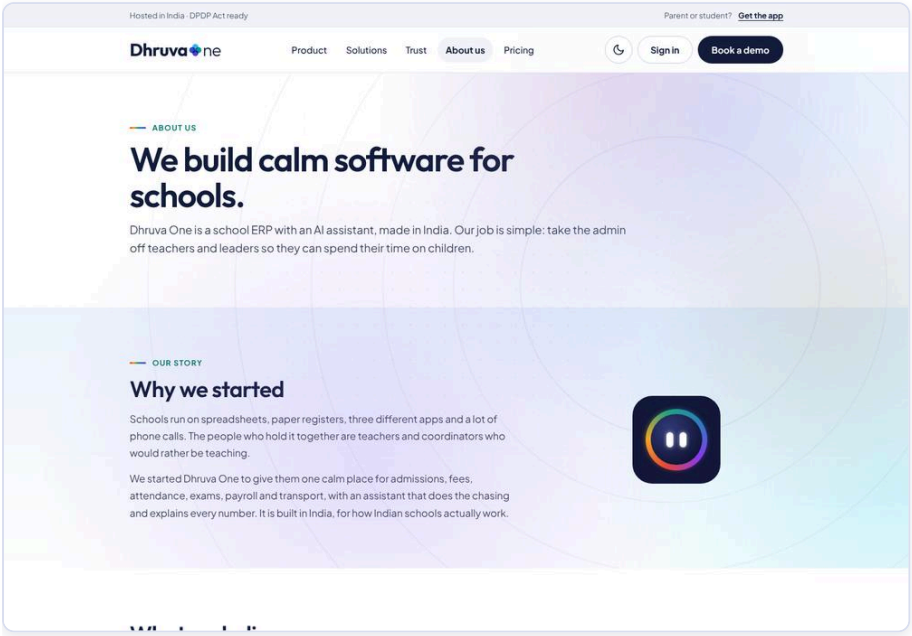

Website · About 01

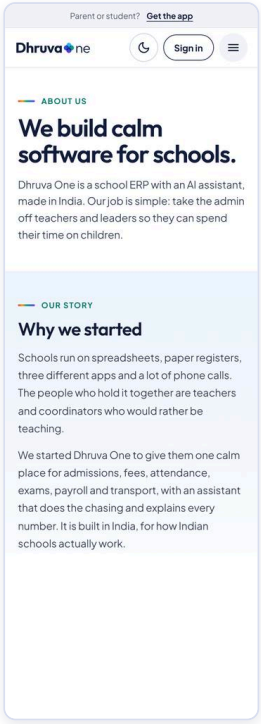

Mobile site · About 01

- "ABOUT US" / "We build calm software for schools." Sections: **Why we started** (two paragraphs); **What we believe** (mission line plus three values: Teachers first, Calm not clever, Children's data is sacred); **Dhruva One in numbers** (2 weeks, 1 record, 3 ways in, India: built for CBSE, ICSE and state boards); **The people behind it** (labelled "Names and bios are sample content for this prototype."): Aarav Sethi (Co-founder and CEO), Neha Kapoor (Co-founder and product), Rohit Malhotra (Head of engineering), Sunita Iyer (Head of school success). Closing "Come and meet the team." with "Book a demo" -> demo form and "See solutions" -> Solutions.

Pricing

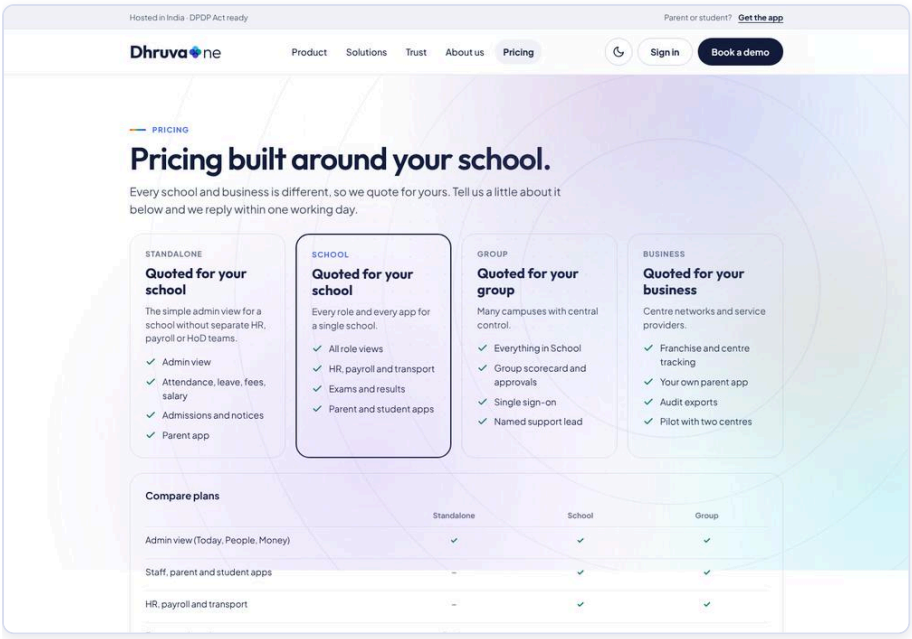

Website · Pricing 01

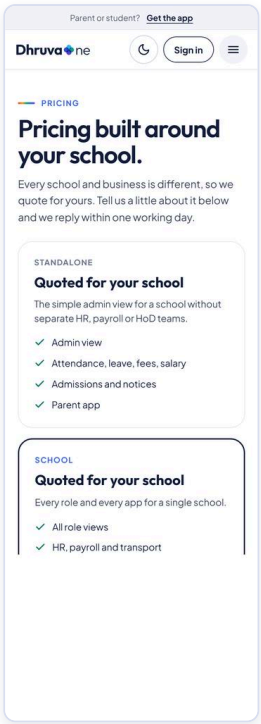

Mobile site · Pricing 01

- No prices are shown: "Every school and business is different, so we quote for yours... we reply within one working day."
- Four plan cards, each "Quoted for your school/group/business": **Standalone** (admin view; attendance, leave, fees, salary; admissions and notices; parent app); **School** (all role views; HR, payroll and transport; exams and results; parent and student apps); **Group** (everything in School; group scorecard and approvals; single sign-on; named support lead); **Business** (franchise and centre tracking; own parent app; audit exports; pilot with two centres).
- "Compare plans" table, columns Standalone / School / Group: Admin view (Today, People, Money) tick/tick/tick; Staff, parent and student apps -/tick/tick; HR, payroll and transport -/tick/tick; Exams and results Basic/tick/tick; Multi-campus scorecard -/-/tick; Group approvals and limits -/-/tick; Single sign-on -/Add-on/tick; Uptime SLA and priority support -/tick/tick.
- Below, the contact form "GET PRICING OR A DEMO / Tell us about your school." (see Book a demo form). Arriving here preselects "Get pricing".
- Phone: plan cards stack; table fits the width.

Book a demo (form page; also embedded at the bottom of Pricing)

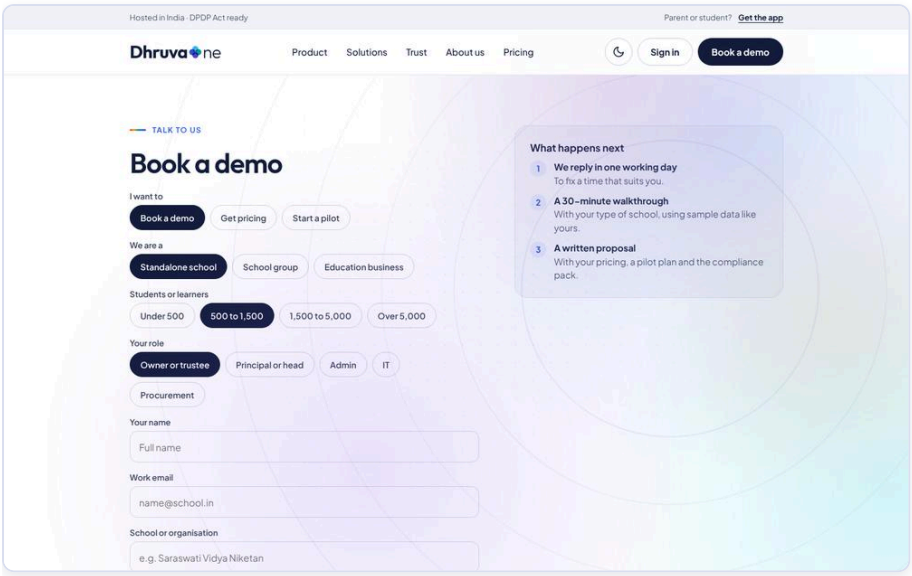

Website · Demo form

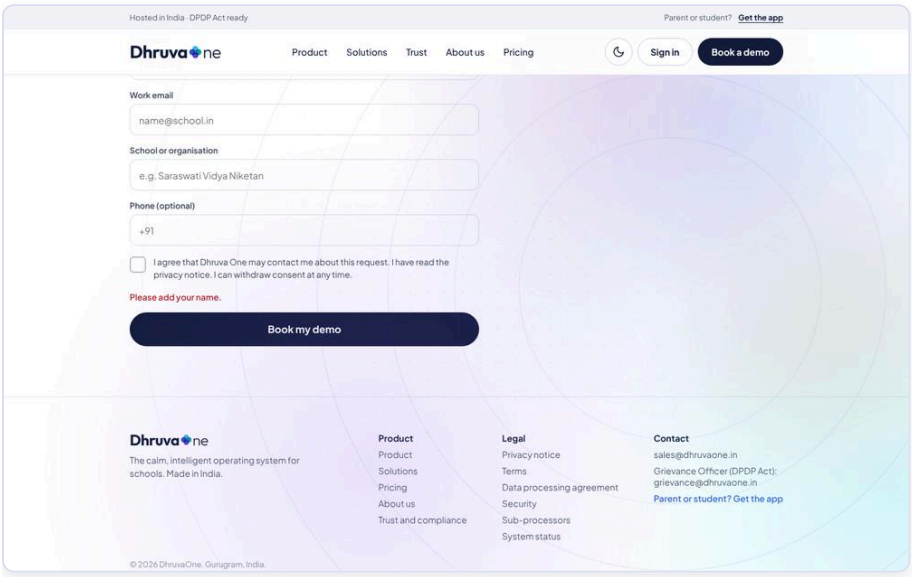

Website · Demo validation

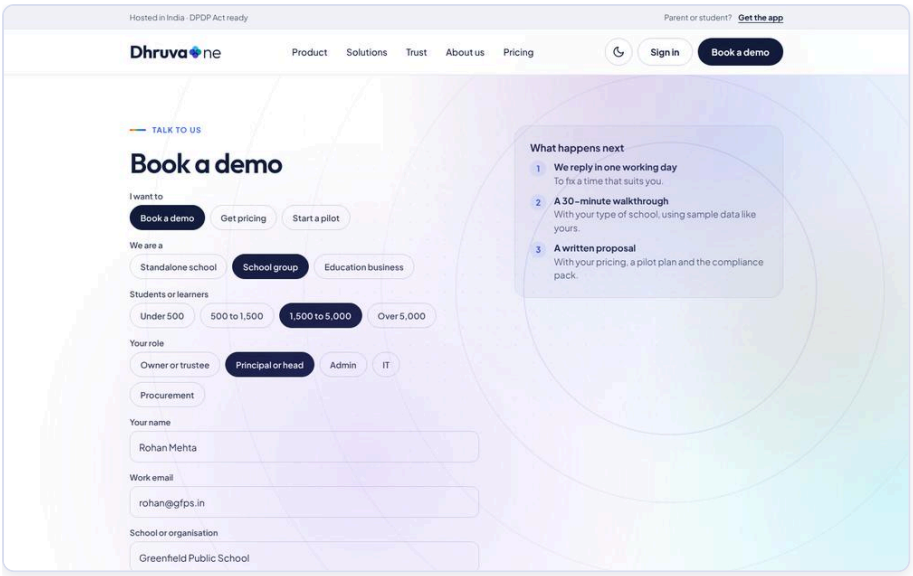

Website · Demo filled

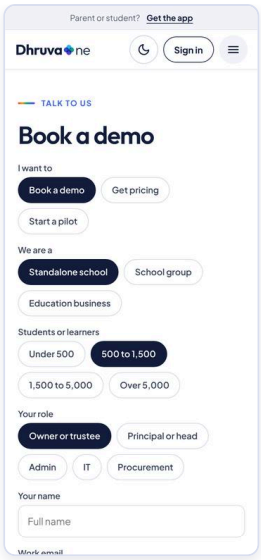

Mobile site · Demo form top

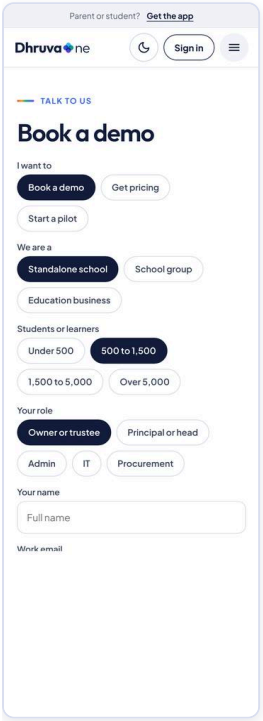

Mobile site · Demo 1

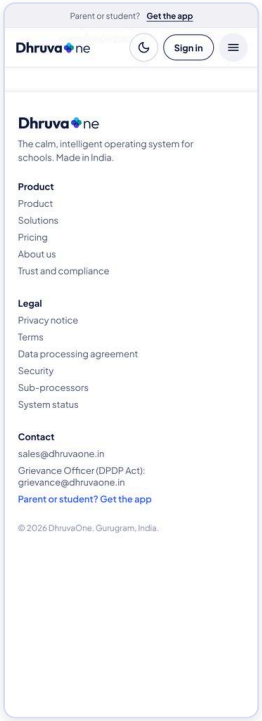

Mobile site · Demo 3

- Eyebrow "TALK TO US"; title follows the chosen reason: "Book a demo", "Get pricing" or "Start a pilot".
- **Fields, in order (single-select pills unless noted):**

1. "I want to": Book a demo (default when arriving from any "Book a demo"), Get pricing, Start a pilot. Changes the title and the submit label: "Book my demo", "Get my pricing", "Ask for a pilot".
2. "We are a": Standalone school (default), School group, Education business.
3. "Students or learners": Under 500, 500 to 1,500 (default), 1,500 to 5,000, Over 5,000.
4. "Your role": Owner or trustee (default), Principal or head, Admin, IT, Procurement.
5. "Your name" (placeholder "Full name"), "Work email" (placeholder name@school.in), "School or organisation" (placeholder "e.g. Saraswati Vidya Niketan"), "Phone (optional)" (placeholder "+91").
6. Consent tick-box: "I agree that Dhruva One may contact me about this request. I have read the privacy notice. I can withdraw consent at any time." (unticked by default; the privacy notice is not a link).

- **Validation** (checked on pressing the submit button; only the first problem is shown, in red above the button, in this order): name shorter than 2 characters -> "Please add your name."; organisation shorter than 2 characters -> "Please add your school or organisation."; email not of the form x@y.z -> "Please add a valid work email."; consent not ticked -> "Please tick the consent box so we can contact you." The error clears once all are valid. Phone is never validated.
- **"What happens next"** side panel: 1 "We reply in one working day / To fix a time that suits you."; 2 "A 30-minute walkthrough / With your type of school, using sample data like yours."; 3 "A written proposal / With your pricing, a pilot plan and the

compliance pack."

- Verified: every "Book a demo" button on the site (header, hero, numbers strip, closing, About, Solutions "Book a demo for this", "Ask a question") opens this page with reason demo; the Home/Product closing "Get pricing" opens it with reason "Get pricing"; "See pricing" and nav "Pricing" open the Pricing page.

Sign in

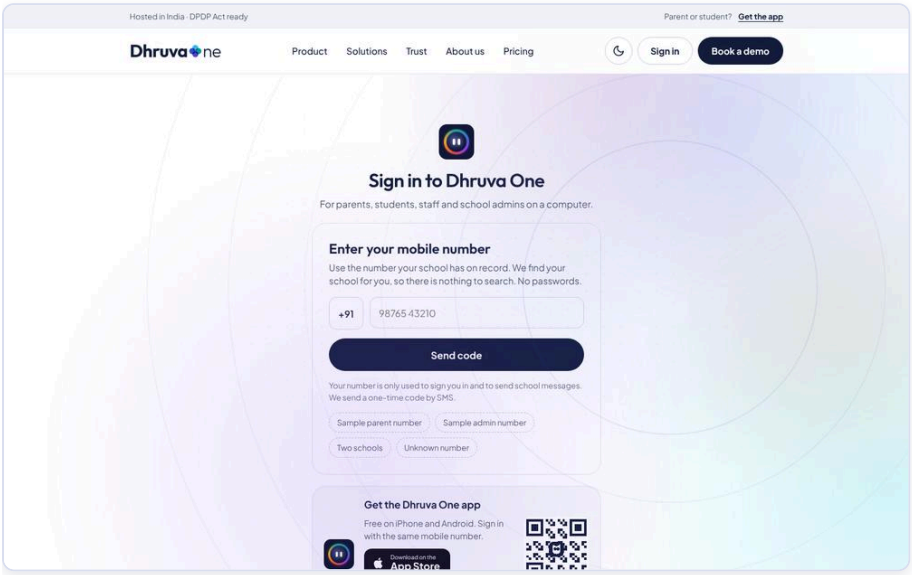

Website · Login 1 number

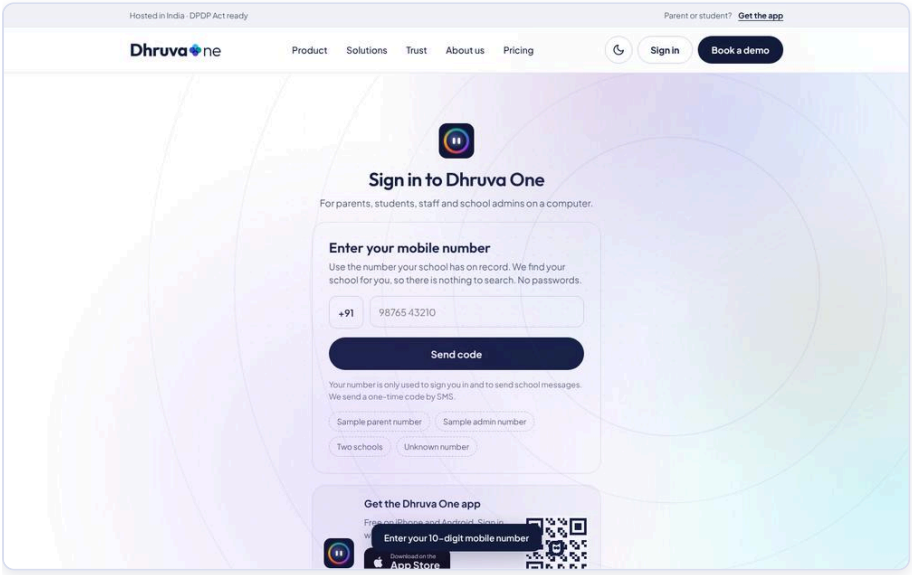

Website · Login short number

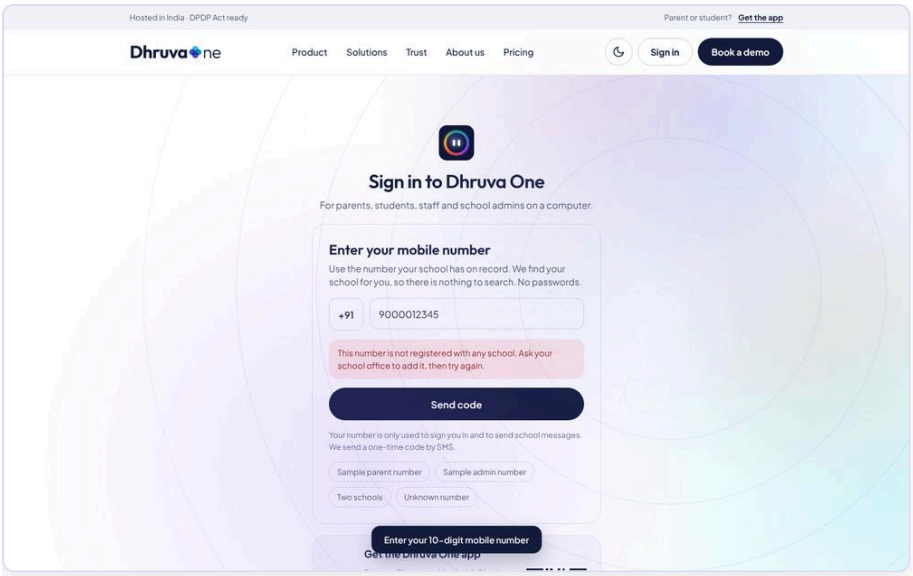

Website · Login unknown number

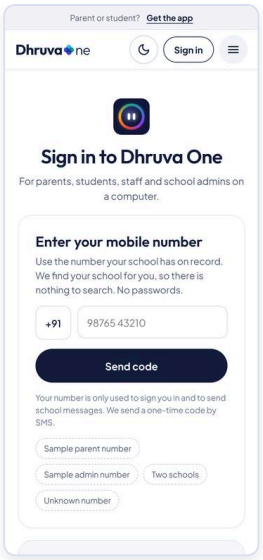

Mobile site · Login 1 number

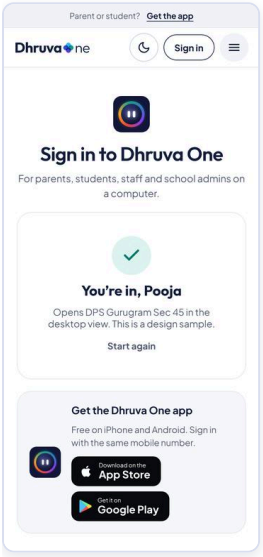

Mobile site · Login 4 signed in

- Title "Sign in to Dhruva One" / "For parents, students, staff and school admins on a computer." Below it a "Get the Dhruva One app" panel ("Free on iPhone and Android. Sign in with the same mobile number.", App Store, Google Play, "Scan to download").
- **Step 1, number.** "Enter your mobile number": "Use the number your school has on record. We find your school for you, so there is nothing to search. No passwords." Field "+91" + 10-digit input (placeholder "98765 43210"; digits only, trimmed to 10). Button "Send code". Footnote: "Your number is only used to sign you in and to send school messages. We send a one-time code by SMS." Four sample chips: "Sample parent number" (9876543210, DPS Gurugram), "Sample admin number" (9812345678, Saraswati Vidya Niketan), "Two schools" (9898989898, DPS Gurugram and Greenfield Public School), "Unknown number" (9000012345).
- Fewer than 10 digits -> toast "Enter your 10-digit mobile number".
- Number not in the directory -> inline message "This number is not registered with any school. Ask your school office to add it, then try again."
- **Step 2, code.** "Enter the code": "We sent a 6-digit code to +91 98••• ••210." Field "One-time code" (placeholder "Type the code", 6 digits only, spaced). A chip "From SMS 482913" fills the code (simulates autofill). "Resend in 0:28" (static text, no countdown). "Verify": fewer than 6 digits -> toast "Enter the 6-digit code". "Use a different number" returns to step 1 keeping the number. Any 6 digits are accepted in the prototype.
- **Step 3, school.** One school: "We found your school" / "Picked up from the mobile number you just verified." card with school name, place and board ("DPS Gurugram Sec 45, Gurugram · DPS Group · CBSE"), "Signing in as Pooja Sharma", "Your role: Parent of Vivaan (5-B) and Aarav (2-A)"; button "Continue as Pooja". Admin sample: Saraswati Vidya Niketan, Karnal, "Mrs. Meena Sharma", role "School admin", button "Continue as Meena". Two schools: "Choose your school" / "This number is registered with 2 schools. Pick the one to open now." Two selectable cards (DPS Gurugram: Parent of Vivaan (5-B) and Aarav (2-A); Greenfield Public School, Jaipur · CBSE: Parent of Vivaan (5-B)). The continue button is grey "Choose a school" until one is picked, then "Continue with <school>". Pressing it unpicked shows toast "Choose a school to continue". "Use a different number" restarts.

- **Step 4.** "You're in, Pooja" / "Opens DPS Gurugram Sec 45 in the desktop view. This is a design sample." Button "Start again" (clears everything to step 1).
- Rules: no password anywhere; school is auto-detected from the number; switching school later is in the app Settings (see platform inventory).

Interactions summary (cross-site)

- Page change always scrolls to top and closes the phone menu.
- Toasts (bottom centre, 2.6 s): Trust downloads, sign-in validation.
- No cookie banner, no search, no live chat; the Dhruva orb card on the hero is not clickable.

Gaps / differences between desktop and phone

- Phone: no top-strip "Hosted in India · DPDP Act ready", no inline nav (hamburger menu with a "Sign in" row), phone slices are scroll-captures of an internal scroll area.
- Same content, same states and validation on both. Night mode on both.

PART 6

Platform

Platform-wide topics

PLATFORM · ALL CHANNELS

Platform-wide topics

How DhruvaOne is organised across a group of campuses and standalone schools, who can see and approve what, how people sign in and switch profiles, how alerts behave, how Dhruva assists, and what is in the MVP versus later phases.

Who uses it. every role; owners and principals care most about tenancy, approvals and rollout; IT and procurement about data and security.

On the following pages:

Add a campus

Business summary

DhruvaOne is one product with two ways of being owned. A **group** (example: DPS Group, 14 campuses, owner Mr. V.K. Shunglu) sees every campus on one scorecard and approves only what exceeds a campus limit. A **standalone school** (example: Saraswati Vidya Niketan, Karnal) is a separate space with its own admin and, where needed, a trustee. People sign in with a mobile number, never a password, and one number can hold several profiles (parent at two campuses, teacher at one) that never mix. Dhruva, the assistant, drafts and explains but a person always approves anything that changes a record or reaches a family. The MVP deliberately runs on data schools already keep and phones staff already carry: no new hardware.

1. Tenancy: groups, campuses, standalone schools

- **Group tenant.** DPS Group, 14 campuses, each with a principal: Gurugram Sec 45 (Ms. Neelam Mehra), R.K. Puram, Lucknow Gomti Nagar, Jaipur Malviya Nagar, Noida Expressway, Faridabad Sec 19, Chandigarh Sec 40, Indore Vijay Nagar, Pune Hinjewadi, Ahmedabad SG Highway, Hyderabad Gachibowli, Kolkata Salt Lake, Chennai OMR, Bengaluru Whitefield. Hero campus for the sample is Gurugram Sec 45; sample date Fri 9 Oct 2026.
- **Standalone tenant.** Saraswati Vidya Niketan, Karnal: "not part of DPS Group, so its fees, staff and records are kept in a completely separate space" (profile-switch explainer rule 3). Nothing is shared with other schools; only the parent's phone number links profiles.
- **Same group, different campus:** looks the same but data is separate: "Fees, circulars and teachers here belong to the Noida campus only. Nothing from Gurugram is mixed in."
- **Group owner view** (the desktop app): tabs Overview, Onboarding, Campuses, Admissions, Reports, Notices, Calendar, Approvals. Campus scorecard has six measures (health score, attendance, fees, new students, enquiries, walk-ins) sorted lowest health first; rows open the campus; colours carry meaning (Strong, Fine, Watch, Act now). Attendance bar chart has a dashed 92% target line. "Campuses on track: 12 of 14".
- **Group vs school scope in the website copy:** group (2 to 50 campuses): principal approves leave up to 3 days and spend up to the campus limit; group owner approves larger spend and new campuses; group HR decides long leave. Standalone (200 to 1,500 students): one admin runs the day; a trustee approves the admin's own leave, salary and fee waivers and may read only the payroll and refund log.
- **Group notices:** the owner sends to campuses (All 14 or any), audiences (Principals, Teachers, All staff, Parents) or one person; channels App and WhatsApp (both ticked by default); Dhruva suggests drafts (Exam arrangements, Fee collection, Diwali wishes); read counts shown (e.g. "Read by 2,690 of 2,976 · 90%").
- **Group calendar:** month view with a campus filter ("All 14 campuses" or one), colour types Exam, Holiday, PTM, Event; add-event.

Add a campus

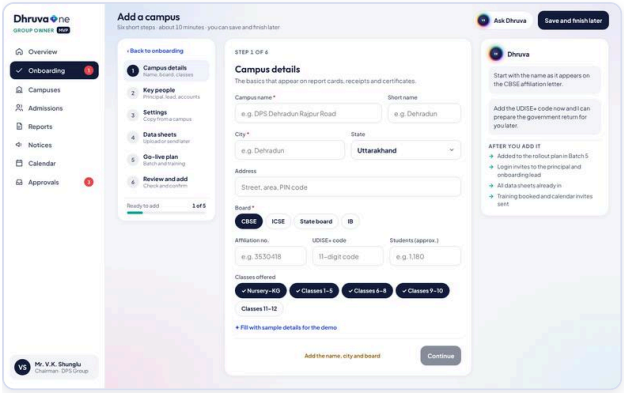

Desktop · Platform addcampus step1

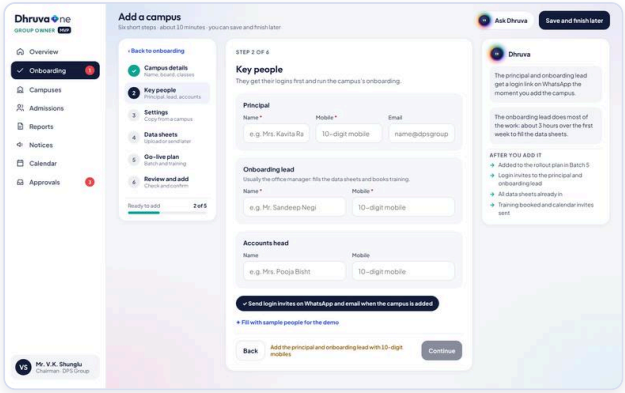

Desktop · Platform addcampus step2 people

Reached from Onboarding "+ Add a campus". Header "Add a campus: Six short steps · about 10 minutes · you can save and finish later"; buttons "Ask Dhruva", "Save and finish later", "‹ Back to onboarding". A step rail shows "Ready to add 1 of 5" progress.

1. **Campus details** (name, board, classes): fields Campus name *, Short name, City *, State (list), Address, Board * (CBSE, ICSE, State board, IB), Affiliation no., UDISE+ code, Students (approx.), Classes offered (Nursery–KG, 1–5, 6–8, 9–10, 11–12 toggles). "Fill with sample details for the demo" helper. Continue is disabled with hint "Add the name, city and board". Dhruva: use the name as on the CBSE affiliation letter; add UDISE+ now so Dhruva can prepare the government return later.
2. **Key people**: Principal (Name *, Mobile *, Email), Onboarding lead (Name *, Mobile *; usually the office manager, about 3 hours in week 1), Accounts head (optional). Tick "Send login invites on WhatsApp and email when the campus is added". Hint "Add the principal and onboarding lead with 10-digit mobiles".
3. **Settings** (copy from a campus): pick any of the 14 as the source; toggles with "Copy" for Grading scheme and report-card format (CBSE 9-point grades, term weightage 40/60), School timings and periods (8 periods of 40 minutes, 8:00 am to 2:15 pm), Fee heads (names only), Group holiday calendar, Approval limits (concessions above ₹25,000 go to the owner). Rule: "Fee amounts are never copied." Dhruva: copying saves about 3 days.
4. **Data sheets**: eight templates (Students and parents; Staff and leave balances; Classes, sections, subjects; Timetable; Fee structure and dues; Transport routes and stops; Holiday and exam calendar; Monthly salary sheet), each "Upload" or "Send later"; "Download all 8 templates". Counter "0 of 8 imported · 0 left for the campus". Dhruva checks uploads for missing phone numbers, duplicate students and non-existent classes; "Send later" sheets go to the onboarding lead with a template and a 20-minute help call.

- **Onboarding tab**: rollout plan table (Campus, Go-live, Data sheets, Staff trained, Parents joined, Status) with 5 batches: Batch 1 pilot Gurugram Sec 45 on 5 Jan (6 of 8 sheets, 45 of 190 teachers, "Needs a fix"); Batch 2 on 19 Jan (R.K. Puram, Noida, Faridabad, Lucknow); Batch 3 on 2 Feb; Batch 4 on 16 Feb; Batch 5 on 2 Mar. KPIs: 14 campuses in 5 batches, 18 / 112 data sheets imported, 1 needs a fix. Note: Roadmap says all 14 live by 31 Mar 2027; the batches finish 2 Mar start, consistent.

2. Roles and permission scope

Eleven MVP roles, expanded in the Final MVP to: owner, principal, teacher, parent, accounts/finance, front office and admissions (CRM), HR and payroll, head of department, transport in-charge, bus attendant (English/Hindi), student, academic coordinator, exam cell, counsellor, Security & IT, admin (standalone). Each role opens on a short Dhruva-prepared task list ("1 OF n things need you").

Role	Sees	Approves / decides	Cannot
Group owner	all 14 campuses, scorecard, admissions, reports, notices, calendar	concessions above ₹25,000, refunds, new posts, new campuses; purchases above ₹5 L	change campus data directly
Principal	own campus: attendance (drill-down), fees, reports, Me; bell opens Approvals	up to campus limit; purchases above ₹50,000 go to principal; long leave forwarded by HoD	no substitutions or swap duty (academic coordinator's job); no invigilation (exam cell)
HoD	team, syllabus, lesson plans, paper review, results	team leave up to 2 days outside exam weeks, else forwards to principal	
Teacher	own classes, timetable, marks, notes	none (requests only)	own children's data never shown in teacher profile
Counsellor	referrals, private session notes	suggestions only for check-ins	notes are private

Role	Sees	Approves / decides	Cannot
Parent	own children (all children in one school together)	early pickups by new persons (Urgent alert: approve or refuse)	other families, class data
Security & IT	jobs log, gate, systems, guard roster	assignment of jobs; visitor approval	
Trustee (standalone)	payroll and refund log only	admin's own leave, salary, fee waivers	anything else

- Staff self-service ("Me") exists for every staff role: leave balances (e.g. Casual 6 of 12, Earned 22 of 30, Sick 9 of 10), apply for leave or out on duty (Type, From, To, Reason, Details, "In charge while you are away"), payslips, notices from owner/principal.
- Principal approval limit examples from the designs: concessions above ₹25,000 go to the owner (Kabir Singh 8–B, ₹35,600 request); refund policy "Unused full months, minus 10%".
- Teacher private data: no teacher observations (decided 11 Oct: too intrusive).

3. Profile and school switching

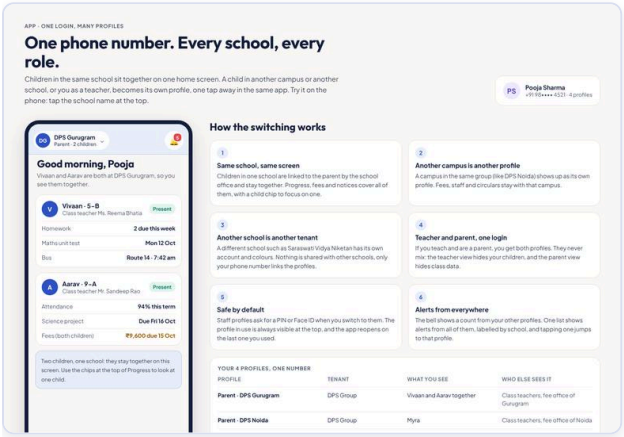

Desktop · Platform profile home

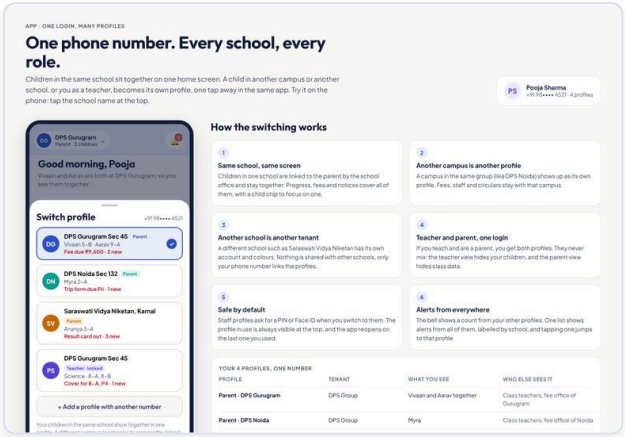

Desktop · Platform profile switch sheet

- Board title "One phone number. Every school, every role." Example number "+91 98•••• 4521 · 4 profiles" for Pooja Sharma: Parent at DPS Gurugram (Vivaan 5–B and Aarav 9–A), Parent at DPS Noida (Myra 2–A), Parent at Saraswati Vidya Niketan (Ananya 3–A), Teacher at DPS Gurugram (Science, 8–A and 8–B).
- **Header chip** shows the current school and role; tapping it opens "Switch profile" sheet listing every profile with school, role, children, what needs attention (e.g. "Fee due ₹9,600 · 2 new") and a tick on the current one; footer "+ Add a profile with another number". A bell shows unread count from the other profiles; "All alerts" lists alerts from all four, labelled by school; tapping one jumps to that profile. Each profile keeps its own colours, menu and data.
- **Teacher profile is locked:** switching to it opens "Unlock your teacher profile" with a numeric keypad (PIN) and "Use Face ID" / "Cancel". Message: "Staff profiles are protected, so a child with your phone cannot open your class data." Toast on switch: "Switched to <school> · <role>".
- **Six rules** (on board): same school same screen; another campus is another profile; another school is another tenant; teacher and parent one login (never mix); safe by default (PIN/Face ID; app reopens on last profile; profile in use always visible); alerts from everywhere.
- **Where it appears:** (1) sign-in by OTP: "Welcome back, Pooja. We found 4 profiles on this number" with "Open the last profile I used next time"; (2) WhatsApp: "this number is linked to 3 schools. Which one do you mean?" then "I will remember this school for the next 30 minutes. Type 'switch' to change."; (3) laptop (teacher and parent web): "SWITCH PROFILE" menu; browser asks for the PIN again after 15 minutes on a staff profile; shortcut Ctrl + K then type a school name.
- **Decision record (design-status):** login is by registered phone number with school auto-detected; "Choose your school" only if a number maps to 2+ schools; switching later is in Settings (gear on the notification centre). The profile-switch explainer board shows the switch at the top of the app (tap school name). The two should be reconciled; web vs app login interpretation is flagged unconfirmed.
- Website sign-in directory (sample): 9876543210 -> DPS Gurugram; 9812345678 -> Saraswati Vidya Niketan; 9898989898 -> DPS Gurugram and Greenfield Public School; unknown numbers get "This number is not registered with any school. Ask your school office to add it, then try again."

4. Notifications and approvals rules



Phone · Platform notifications rules

- **Rules that keep it calm** (notification catalogue): Three tiers: Urgent breaks quiet hours and repeats once after 5 minutes; High shows a banner in school hours and waits overnight; Normal is silent and grouped. Quiet hours 9 pm to 7 am; parents can change them but safety alerts and early pickups still come through and cannot be turned off. Android channels: Safety, Fees, Bus, School updates, Messages (each mutable in system settings); iOS uses Time Sensitive for Urgent only. Fallbacks: if push is not opened in 30 minutes, fee and pickup alerts go to WhatsApp; SMS is used for gate safety only. No marketing, ever: students from Class 6 get homework and results only; the school sets who can send notices. Language English or Hindi chosen at sign-in.
- **Catalogue (event, who, message, tier, tap opens):** Child marked present (Parent, Normal, Attendance); Child absent not marked by 9 am (Parent, High, "Tap if this is wrong", Message teacher); Fee due in 7 days then overdue (Parent, Normal, Pay); Bus 10 minutes away or late (Parent, High, Live map); Early pickup by someone new (Parent, Urgent, Approve or refuse); Class attendance not marked (Teacher, Normal, Mark); Cover assigned (Teacher, High, Timetable); Leave decided (Staff, Normal, Leave); Decision waiting (Principal/admin, Normal, Today); Safety incident (Principal/security, Urgent, Job); Salary credited (Staff, Normal, Payslip); Results published (Parent/student, Normal, Results).
- **Lock-screen examples:** iPhone and Android variants for parent, teacher, principal, admin. Android actions: Track / Mute today; Pay now / Remind me; Accept / Swap (cover); Mark now; Assign / Later; Review.
- **Approval chain** (Owner Approvals tab): cards for Fee concession (50% for Term 2, ₹35,600, "Above the campus limit"), Fee refund (₹42,000, Pune), New posts (2 Maths teachers PGT, ₹1.1L/mo); each shows who requested (principal), context, policy line, and "Approve" / "Decline". Verified: Approve on the Overview card shows "Approved · Gurugram Sec 45 notified" and the count drops from 3 to 2. Approvals are logged. Principal's Approvals reached from the bell; HoD forwards long leave there. Staff leave: HoD approves up to 2 days outside exam weeks.
- **Approval limits** (Project docs): concessions > ₹25,000 to owner; purchases above ₹50,000 to principal and above ₹5 L to owner; standalone: trustee for admin's own items.

5. Dhruva assistant behaviours

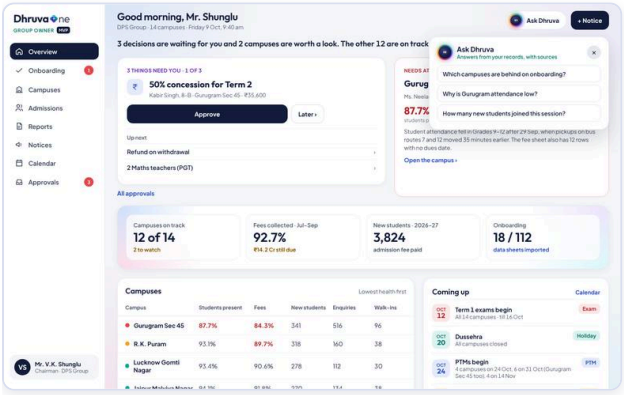

Desktop · Platform ask dhruva owner

- Principle (MVP scope): "Dhruva never guesses. Every answer shows which records it used, and anything it drafts waits for a person to approve." Website: "It never changes a record or messages a family on its own."
- **Ask Dhruva** (owner desktop, verified): panel "Answers from your records, with sources" with suggested questions "Which campuses are behind on onboarding?", "Why is Gurugram attendance low?", "How many new students joined this session?". Screenshot.
- **Prepares first task list** for each role ("3 THINGS NEED YOU · 1 OF 3", with Approve / Later). Examples: group health narrative ("Attendance fell in Grades 9–12 after 29 Sep when pickups on bus routes 7 and 12 moved 35 minutes earlier; the fee sheet has

12 rows with no dues date").

- **Capability list on the website:** Cover finder; Students who need help; Fee follow-up (English or Hindi, tracks replies); Explain a number; Read a marks sheet (photo from WhatsApp, Dhruva reads and publishes); Draft a notice (translated); Admissions assistant; Approvals summary.
- **Other behaviours in designs:** suggests assignee for security/IT jobs and groups repeat reports; fills night roster fairly (no more than 2 nights each, rest day after each); suggests counsellor check-ins (suggestions only); drafts papers to HoD blueprint; reconciles bank lines and suggests fixes (Finance); shortlists candidates and calculates final settlement (HR).
- **Open decisions** (design-status): photo reading is a prototype only; marks and learning plans publish without a teacher review step (attendance too, with Undo): confirm with client. Hindi/regional and WhatsApp for Dhruva are Phase 1.

6. Data and security

Only what the designs state (website Trust page, flagged "Sample claims... confirm each statement... before publishing"):

- India region hosting, backups in India, encryption in transit and at rest, daily backups with tested restore, single sign-on and multi-factor for staff (website), role-based access, audit log of every change, annual independent penetration test, data export in open formats, deletion 90 days after exit with written confirmation, no ads or tracking, no sale of student data, parental consent per child under 18, DPDP Act roles (school = data fiduciary, DhruvaOne = processor), access/correction/deletion requests approved by the school, breach notice per DPDP Rules, named Grievance Officer (grievance@dhruvaone.in).
- Sub-processors listed: cloud hosting, SMS/OTP provider, WhatsApp Business provider, email delivery, payment gateway (India, PCI DSS). No ISO/SOC certification is claimed anywhere in the designs.
- In-app: staff profile PIN or Face ID, re-PIN after 15 minutes on web; passwordless OTP sign-in; teacher/parent profiles kept apart; counsellor notes private; photo payslip view PIN-protected on WhatsApp (design-status).
- **Physical security and IT (Security & IT role)** — (Today, Jobs, Gate, Systems, Team, Me) and phone (Today, Jobs, Gate, Team): one jobs log (e.g. "Unknown man waiting near Gate 2 for 40 minutes", Urgent, "Send Harish" suggestion), filters All/Security/IT, statuses New, Assigned, In progress, Resolved, priorities Urgent/High/Normal; reporter told when resolved; Gate: visitors waiting for host (Approve), on campus (Check out; 23), expected today 18, checked out 41, early pickups against authorised list; Systems: Internet OK, Wi-Fi Down 1 of 38, CCTV 63 of 64, Smart boards 96 of 98, Printers 11 of 12, Backup last night 2:00 am 412 GB, exam-week checklist; Team: 12 guards, 2 technicians, Diwali night roster with 3 gaps "Fill the 3 gaps with Dhruva". Scope note: CCTV feeds and full visitor management are Phase 2 per original scope; prototype shows a simple gate log pending client decision.

7. Audit

- "100% of changes in an audit trail" (website). Every approval is logged (Approvals, Trust). Audit exports for business customers. Audit log screens themselves are not shown as a screen in the platform boards except where roles show "Audit trail" claims; payroll and refund log is read-only for a trustee.

8. Integrations (only as shown)

- Website tiles (labelled sample, confirm before publishing): payment gateway (UPI, cards), WhatsApp Business, SMS and OTP, accounting export (Tally-ready files), bus GPS, biometric attendance, Google and Microsoft sign-in, spreadsheet import (CSV and Excel).
- Project docs: MVP sends a daily export to Tally; TallyPrime connector every 30 minutes and on demand appears in the Finance prototype (phasing to be confirmed: originally Phase 1); bank feeds HDFC/ICICI, SBI upload (Finance prototype); CBSE report cards and registration checks; UDISE+ return preparation (enrolment, gender, RTE report); WhatsApp Business number set up with the school; payment gateway account provided by the school.
- Not integrated in MVP: RFID, GPS, face gates, CCTV feeds (Phase 1 pilot or Phase 2).

9. MVP scope and roadmap

- **MVP for DPS Group, October 2026.** Eleven clickable role phones plus the roadmap. Not in MVP: health records, library, inventory and purchase, hostel, CCTV and visitor management.
- **Module table (in the MVP / school provides / Phase 2):** Student records (all fields; Excel export from current software / online admission forms). Attendance (roll call by teachers, about a minute a class; absent alerts on app and WhatsApp / RFID or face gates, biometric staff). Timetable and cover (free-teacher list / automatic generation). Homework and notices (read receipts, WhatsApp / regional languages). Exams and marks (marks on phone, CBSE report cards, paper drafts / online tests, OMR, board analytics). Fees (UPI/card/net banking, counter receipts, defaulters with call notes, WhatsApp reminders; MVP sends a

daily export to Tally / two-way Tally sync). Staff leave and payslips (from the monthly salary sheet / full payroll, PF, ESI, TDS). Transport (attendant taps picked up, reached, left / live GPS, RFID, route planning). Approvals and owner view (14–campus dashboard; limits e.g. ₹25,000 / purchase and capital approvals, budgets). Dhruva AI (answers with source, drafts / early warnings after a year of data).

- **Habit change** (small): teachers about 5 minutes a day; accounts enter counter receipts and call notes; bus attendants three taps per trip with any smartphone; principal and owner approve from the phone.
- **Per-campus onboarding in four weeks:** Week 1 Data in (8 Excel templates), Week 2 Staff trained (45 minutes teachers, 2 hours accounts and principal's office, on campus), Week 3 Parents join (app invite and WhatsApp opt-in; soft launch at Gurugram Sec 45), Week 4 Live; remaining 13 campuses follow, 3 to 4 every two weeks.
- **Roadmap, 18 months Oct 2026 to Mar 2028:** *MVP build Oct–Dec 2026* (core platform and import, 11 role apps, WhatsApp Business, payment gateway, user test with Gurugram staff 14–18 Dec; gate: Gurugram principal signs off; measures: 8 sheets imported cleanly, 90% of test tasks done without help). *Go-live Jan–Mar 2027* (pilot at Gurugram Sec 45 from 5 Jan; then 3–4 campuses every two weeks; Term 2 exams and report cards; gate: pilot hits targets for 4 weeks; measures: 95% of sections mark attendance by 9:30, 70% of parents active monthly, 50% of fees paid online; milestones Pilot live, All 14 campuses 31 Mar 2027). *Phase 1 Apr–Sep 2027* (session 2027–28 set up in DhruvaOne from 1 Apr; Tally sync, full payroll, biometric import; Hindi and regional languages, Dhruva on WhatsApp; online admission forms; timetable generator; GPS pilot at 1 campus; offline mode and multi-child parents; gate: finance closes a month with no manual entries; 70% fees online, payroll for all 14 campuses, 80% parents active). *Phase 2 Oct 2027–Mar 2028* (GPS and RFID on every bus; online tests, OMR and board analytics; purchase, inventory, budgets; health records, library; visitors and CCTV links; early warnings; open APIs; iPad/kiosk views; appraisals; goal: one platform for every campus function; paper registers retired). Rationale: modules needing nothing new ship first; integrations follow the first full session; hardware piloted at one campus; AI predictions wait for a year of data.
- **Final MVP additions agreed Oct 2026** (Project doc): owner glow theme, attendance bar charts with 92% target, Admissions counts only fee-paid new students (3,824), principal pie-chart attendance with drill-down and absence watch, academic split (coordinator, exam cell, HoD, counsellor), teacher phone-first design (Dhruva does first drafts), HR payroll groups (teaching, non-teaching, contractors, visiting faculty), Security & IT simplified, transport desktop with live board from attendant taps (no GPS), Admissions CRM 7–stage pipeline, Finance (bank reconciliation, Tally sync, purchases, vendors, inventory) and its phasing.

Gaps / differences

- Switch school location differs between profile-switch explainer board (top chip) and design-status (Settings gear).
- Website integration list includes GPS, biometric and Tally which the MVP table places in later phases.

APPENDICES

Technical notes, permissions and glossary

A · Technical notes

B · Approvals, notifications and permissions

C · Glossary

Appendix A

Technical notes

Data fields, rules, integrations and scope for each chapter, for IT, procurement and implementation teams.

Group Owner

- Data fields per campus: name, principal, health score (0–100), attendance % (today), fee collection % (Jul-Sep), new students (2026–27, admission fee paid), enquiries and walk-ins (admissions 2027–28), student and staff counts.
- Onboarding tracks eight named data sheets per campus (Excel templates, validated on upload; the system checks missing parent phone numbers, duplicate students, classes that do not exist). Sample counts: 14 campuses, 5 batches, 112 sheets in total.
- Add-campus fields: name, short name, city, state, address, board (CBSE/ICSE/State board/IB), affiliation number, UDISE+ code (11 digits), approximate students, class stages, principal / onboarding lead / accounts head (name, 10-digit mobile, optional email), copied settings (grading, timings, fee-head names, holiday calendar, approval limits), batch, training dates, parents' WhatsApp number choice (group or campus), fee payment account (campus bank account or group account).
- Integrations shown: WhatsApp Business delivery reports, app read receipts, UDISE+ return preparation, CBSE affiliation number. Tally and bank feeds are not shown on this board. Fee payments account choice is shown (campus or group account).
- Permission rules visible: owner threshold Rs 25,000 for concessions; refund policy "unused full months minus 10%"; the approval limits can be copied to a new campus.
- Audit: "every decision is logged" (footer on phone approvals).

Principal

- Data sources named on screen: class registers marked by teachers, fee ledger, notes from accounts, student register (UDISE+), staff records, monthly salary sheet, marks entered by teachers, front-office registers.
- Key numbers: 92% attendance target (dashed line); 85% default absence flag; 75% CBSE minimum; Rs 25,000 concession limit; leave over 2 days goes up from HoD/vice principal; leave over 3 days for principals goes to the chairman too.
- Integrations shown: WhatsApp and app notices with read receipts; payroll bank credit to ICICI account (••5174); UDISE+ report; CBSE pattern for assessments. Parents' app invites by WhatsApp; staff invites by SMS.
- Setup stores: timings, saturday pattern, terms and assessments, calendar events (31), sections and seats, subjects and periods per stage, leadership roles, class teachers, data quality fixes (missing mobiles, duplicates), RTE confirmation, roll-number rule, attendance and leave rules.
- Audit: setup completion notifies the group office; fee notes show author and date.

Standalone School Admin

- Data shown: attendance by class band (Pre-primary, Class 1–3, 4–5, 6–8, 9–10), teacher attendance and leave balances (casual, earned, sick), free-period map per teacher, fee demand and collection for the month, overdue months per family, payroll changes (unpaid leave, new joiner pro-rata, advance recovery), enquiry stage (New, Visit booked, Form stage, Seat offered), seats per class (out of 40), notice status (Draft, Sent, opened %).
- Rules: reminders are sent over WhatsApp and SMS with the amount and a pay link; the message says "A friendly reminder". Salary approval requires all monthly changes to be confirmed first; seat offers give the parent three days to confirm.
- Integrations named: WhatsApp and SMS for parent communication and fee reminders; app notifications to teachers. Payment link is mentioned but gateway is not named. Tally or bank is not shown.
- Audit: the chairperson can read the payroll log and refund log (read-only).

Academic Coordinator

- Timetable data model in the design: sections (60 = classes 1–12 x A-E), teacher records with post (PRT/TGT/PGT) and a weekly norm (TGT 30, PGT 26), 41 rooms/labs, 8 periods x 6 days, 40-minute periods, break after P4. Constraint set = the six rules; hard conflicts detected = teacher double-booked, room double-booked, teacher on approved leave; soft rules may be bent and disclosed.
- Generator output: draft per class, % unchanged (74% in sample), list of clashes with ranked alternatives, load before/after, rule compliance. Draft stays private until approval; approved set has a start date and audience list.

- Integrations shown: leave calendar (teacher not available), app notifications, WhatsApp for parents, student app. No external system shown.
- Permissions: coordinator generates, edits clashes, approves and withdraws; HoDs receive the clash report; teachers and parents see only approved timetables on or after the start date.
- Audit: approvals, withdrawals, reminders and shares each produce a visible confirmation; no audit-log screen in this design.

Head of Department

- Data used: teacher roster with post and weekly load against norm (TGT 30, PGT 26; department range 26–30), leave balances per type, plan statuses (Reviewed, To review, Not submitted, Late), paper stages (With teacher, With HoD, With exam cell, Printed and sealed), question metadata (marks, chapter, difficulty), blueprint (planned vs set marks per chapter, difficulty split), syllabus % per section against annual plan, daily pace check-in (plan/ahead/behind + reason), marks by section and topic, homework turnaround days and % within 3 days.
- Rules: HoD leave authority = 2 days outside exam weeks; approved leave flows to coordinator (cover) and HR (leave register); watermarked "HoD review copy" PDF for papers; Dhruva's flags are advisory.
- Integrations shown: app inbox/notifications only; no external system.
- Audit: each action leaves a history line (notes, reviews, observation bookings) on the teacher record.

Exam Cell

- Paper workflow states: not set, with HoD, moderation (exam cell), approved (printing), printed and sealed; blueprint = planned marks per chapter vs set marks, difficulty split; strongroom log on seal.
- Seating logic: 2 classes per room, alternate seats (A/B interleave), roll order, 48 seats per room (sample), 42 rooms, 84 invigilators/day, 3–4 duties per teacher per week, never for own subject, no paper that day.
- Date sheet rule set (5 rules) with holiday/PTM/event calendar lookups, setter deadlines auto-derived (Fri 27 Nov for UT4).
- Marks checks: entries above maximum, absent-with-marks, section average change vs previous test (threshold shown: others fell by 4 or less, flagged 18).
- CBSE: record validation against admission data and Class 9/11 registrations; WhatsApp for parent confirmation; export file for the CBSE portal; fee-paid count shown.
- Report cards: totals, grades, ranks, CBSE format; principal approval gate before parent visibility.

School Counsellor

- Case object: student, class, reason, referrer, status (new, booked, open, closed), next session, context, Dhruva suggestion, history log. Signals computed from attendance, marks and teacher notes (thresholds not shown; examples: attendance 71.8%, absent 9 of 30 days, marks down in 2–3 subjects, sick-room visits).
- Session notes: structured tags plus a free-text draft saved privately; group sessions supported.
- Surveys: 330 Class 10 students, 268 done; stream suggestion from interest survey plus marks.
- Integrations shown: app notifications and WhatsApp (parent invites), NTA exam windows for guidance reminders (indicative dates), transport and accounts referral inputs.
- Audit: case history and a "Case closed · can be reopened" entry are written to the case timeline.

Teacher

- Data: timetable (8 periods, rooms, covers), roster per class (roll, name, attendance %, UT1 to UT3, homework on time, flags), attendance register with reason notes, marks per assessment (out-of-maximum, blank and absent validation), homework submissions with per-question checks and flags, lesson log (used to build notes and plans and chapter "taught" status), paper pattern (sections, type, count, marks, choice, difficulty mix, answer key), notes content blocks, plan blocks, remedial suggestions, pace check-in (on plan, ahead, behind with reason), inbox threads and broadcast read counts, leave and duty requests, payslips.
- Rules: attendance default present; marks must be valid before save; paper marks must equal the total; board-pattern papers compared to the HoD blueprint; pinned items survive redraft; broadcasts report unread tonight.
- Integrations shown: WhatsApp (attendance to parents, notes, broadcasts), student and parent apps (notes, homework, replies, marks at 4 pm), CBSE sample paper and 2026-27 board pattern reference, Word and PDF export and printing, HR payroll (payslips), exam cell hand-off.
- Audit: every approval step has a person and time (HoD review, coordinator remedial, counsellor referral), messages show read counts.
- Everything is sample data.

HR and Payroll

- Staff record fields shown: Employee ID (E1000 style; own ID DPSG-S-0215), name, role, department, school/section, employment type (Teaching, Non-teaching, Contract, Visiting), status (Active, Probation with end date, Joins date, Document due), reporter, date of joining, annual CTC, monthly gross, last net pay, leave balances (Casual /12, Sick /10, Earned /30), document set (offer letter, ID and address proof, qualification certificates, police verification with expiry, bank and PF form), payroll group.
- Payroll rule model: pay basis, pay date, early flag, earnings and deductions toggles, approval rule, member list. Statutory items shown: PF 12%, ESI, professional tax, TDS on salary, TDS 2% (194C), TDS 10% (194J); UAN; IFSC check; DA arrears; early pay with cut-off ("lock to 15 Oct").
- Integrations shown as text: ICICI salary-account bank file generated by Dhruva and sent on the pay date; WhatsApp reminders; payslip email; PDF payslip download; gate log and timetable and class attendance used as evidence for exceptions; CBSE registration export appears only as a shared-code message, not on HR screens.
- Audit: "Record opened for editing · changes are logged"; exception decisions leave notes ("note added for the principal", "note sent to the agency").
- Rules: attendance cannot be locked while corrections are open; exceptions block approval; final settlement waits for all clearances; comp-off earned from extra duty; gratuity "none under 5 years".

Finance and Accounts

- Data: vouchers (RV receipt, PV payment, PB purchase, JV journal, CV contra, SV sales; auto-numbered per type), ledgers grouped under ledger groups under five main groups (Funds, Assets, Liabilities, Income, Expenses), cost centres (Primary, Middle, Senior, Transport, Administration), vendors (GSTIN, TDS section/rate, MSME flag, rating, documents), POs with three-way match (PO, goods received, vendor bill), requisitions with 3 quotes, stock items with reorder levels, asset register, fee heads, bank lines.
- Integrations shown: Tally (TallyPrime 5.0 connector, sync every 30 minutes and on demand, vouchers out, masters in, ledger mapping, failure reasons and fixes, sync log); bank feeds (HDFC and ICICI daily feed, SBI statement upload); Razorpay gateway settlement reconciliation with fee and GST split; WhatsApp (fee reminders, parent notices, vendor POs); payroll (salary journal, TDS, PF, ESI, payslips from HR); Transport (transport fee, bus insurance and fitness); email.
- Statutory: TDS 194C/194J with rate per vendor, 24Q/26Q, TDS deposit, PF ECR, ESI, professional tax, GSTR-1/3B (shop sales only; school fees exempt), Form 10B, ITR-7, 12A/80G; MSME 45–day rule.
- Permissions: role-scoped to Accounts in-charge; assistants are makers; principal and owner are approvers. Month and year locks.
- Everything is sample data.

Admissions and CRM

- Family record: id, parent name, child name, grade applied, source (Website, Google search, Walk-in, Instagram, Open House, Referral with referrer, Phone call), stage (New, Contacted, Tour booked, Toured, Applied, Offer made, Admitted), temperature (Hot, Warm, Cold), masked phone, note, interests, transport availability, call log (outcome, note, time), documents (Birth certificate, Photo, Last report card, Transfer certificate), fee (admission fee ₹65,000; tuition per quarter by grade band).
- Seat model: seats, offers, admitted, waitlist, left; status derived from fill percentage (under 25% flagged); waitlist ordering by date with sibling and staff-child priority.
- Funnel stage conversion percentages and source conversion are computed from season records.
- Integrations shown as text: WhatsApp (English and Hindi) for messages with read or reply rates; fee payment in the app flowing into admissions ("Fees paid in the app show here on their own"); accounts and class teacher notification on admission; transport route availability.
- Audit: calls are logged with time and note on the family record.

Security and IT

- Job record: id, title, type (security / IT), location, reporter (person, group of reporters or system alert), time, priority (Urgent, High, Normal, Low), status (New, Assigned, In progress, Resolved), suggested assignee with reason, assignee, description. Priority and status are displayed as chips.
- Visitor record: name, purpose, host, in-time, wait minutes, photo taken at the gate tablet, badge printed on approval, check-out. Pickup record: child, class, collector, relationship, authorised flag, photo, parent notification.
- Systems: monitored counts per system (Wi-Fi access points 38, CCTV cameras 64, smart boards 98, printers 12), internet providers (Airtel 1 Gbps with Jio backup), nightly backup (2:00 am, 412 GB, restore test). Access point and camera IDs (AP-S2–03, CAM-14, CAM-09, AP-L1–01).

- Integrations shown as text: WhatsApp to guards; app push to staff and parents; gate tablet photo; the exam cell checklist. No external vendor integrations are shown.
- Audit: pickups are logged with photo; resolved jobs appear in "Recently fixed" with technician and time taken (average 40 minutes over 30 days).

Transport and Bus Attendant

- Data per bus: id/number, registration, route, stops (name, time, children count), seats and capacity, driver, attendant, live state (on time / late / breakdown / not started / at school), stop-tap timestamps, insurance, fitness, permit, pollution dates, service date and status.
- Child on bus: name, class, photo, stop, stop-tap state (to pick up / on the bus / not here / left at stop / absent), authorised pickup list (relationship and name), "walks home alone" with written consent on file, parent code.
- Status is derived from attendant stop taps, so the live board "works without GPS"; GPS in every bus feeds only speed (limit 40 km/h city) and route-deviation alerts.
- Integrations shown as text: fee ledger sync (accounts) with "Sync now"; app messages with SMS backup; WhatsApp reminders with pay link; Excel and PDF report export; English and Hindi message drafting; offline save on the attendant phone ("saves on the phone if the network drops"); text-to-speech "Read aloud".
- Rules: attendant cannot leave a stop until every child is marked; a trip cannot close until three empty-bus checks are ticked; unlisted pickup requires parent code or the child stays on the bus; fee slabs by distance; full bus cannot accept a child; fee bill is updated with route changes.
- Audit: speed alerts "logged in the driver's record"; every handover logged with parents told; "Trip closed · bus checked empty at <time>".

Parent

- Data fields per child: name, class-section, roll, class teacher, age band, today's attendance and who marked it, bus assignment (and gate pass for parent-collected children), attendance (percent, days, absence list with reason), marks (subject, marks, out of, previous test, class average), descriptive grades for junior classes, report card (rows per term, co-scholastic grades, attendance, remark, signed by principal), fees (id, label, amount, due date, note), homework (subject, title, status, marks, teacher comment).
- Fee rules visible: line items per child, sibling discount (10%), optional items unlocked by consent, partial selection, three payment methods, receipt number series (RV-xxxxx), receipt carries admission number (DPSG/2016/0418), receipts to WhatsApp and PDF.
- Messaging rules: topic-based routing table (marks/homework and attendance -> class teacher, study pace -> academic coordinator, fees/bus/certificates -> school office), reply-time promises, quiet hours (not after 7 pm, not on Sundays), office thread shared across siblings.
- Leave rules: day count excludes Sundays; end date cannot be before start; routed to the class teacher; bus attendant told not to wait.
- PTM: 10–minute slots 9:00 to 10:50, in person (room 204 or Room 12, Junior wing) or video link.
- Transport: stop list with times, attendant tap events, handover by code to named adults, driver and vehicle number shown.
- Identity: one login for several profiles (children at this school together; other campus, other school and a teacher role as separate profiles, teacher profile needs PIN or Face ID).
- Integrations shown: WhatsApp (receipts, reminders), UPI/card/net banking selector, PDF downloads, phone calendar, phone dialer for Call. No Tally or CBSE integration appears in this board. Data is sample.
- Audit shown: the school can see that a notice was read; leave status trail "With class teacher" -> "Approved".

Student, Classes 6 to 8

- Data: class, section, roll, house, class teacher, parent relation; timetable per day (8 periods, break after P4); homework (id, subject, title, due, state todo/submitted/returned, marks, feedback, XP); notes (key points, practice count, new flag); doubts thread (subject, question, answer, time); marks (subject, marks, out of, previous test); attendance (percent, days, absences); holistic domains (4 levels), activities, remark, reflection; leave (dates, reason, status).
- Gamification rules: XP per quest (30, 50, 10) and per correct answer (10); 10 XP = 1 house point; level threshold 1,500 XP for Level 8; six badges with counters fed by named sources; "whiz" badge per subject advances on 4 of 5 correct in a subject game.
- Submission modes: camera photos, file upload, typed answer. No marking engine is shown; teacher marks come back as "Returned".
- Safety by design: Dhruva gives hints, not answers; teacher contact is gated by "Still stuck?".

- Integrations shown: CBSE holistic progress card structure (label only). No external integration is shown otherwise. Data is sample.

Student, Classes 9 to 12

- Data: class, section, roll, house, exam seat (Hall B, seat 14), timetable (8 periods; Class 10 includes Information technology, Games, Library), homework with states todo/submitted/returned and "checked by Dhruva", notes with practice-question counts, doubt threads, marks with previous-test deltas, attendance, holistic card (co-scholastic, life skills, career, activities, remark, reflection), leave.
- Readiness model: per subject Revised % (share of topics ticked) and Practice % (30–day average of practice sets and class tests); overall = mean of subject means; the app states one 30–minute revision on the weakest subject adds about 2%.
- Plan model: three slots a day with a time window, linked note, points (20 / 30 / 20), house points (points ÷ 10) and an achievement that counts the task; completion gives "+70 points".
- Points: study points (not XP); house points = study points ÷ 10; achievements: Board ready (5 timed papers), Problem solver (20 sets), Steady scholar (14–day streak), Doubt clearer (5 closed doubts), Full month (attendance), Top 10%.
- Timed paper: 15–minute limit, 6 questions with marks and worked solutions, auto-submit, pause and resume, results feed readiness.
- Integrations shown: CBSE (regional round, board exam entries in the calendar). No other integration appears. Data is sample.

Phone app: sign-in, profiles and notifications

- **Identity:** mobile number is the account key; OTP (6 digits, expires in 10 minutes, resend after about 24 to 28 seconds, option to receive on WhatsApp, iOS autofill from Messages); one number maps to many profiles across tenants (DPS Group campuses and standalone schools). Tenants are isolated ("Nothing is shared with other schools, only your phone number links the profiles").
- **Profile model:** profile = tenant (school or campus) + role. Children in one school are grouped in one parent profile (linked by the school office). Teacher and HoD are separate profiles under one login. Staff profiles are locked behind PIN or biometric. The app reopens on the last-used profile. A staff member's own children are never shown in the staff profile.
- **Device security:** "Open with Face ID/fingerprint", "App PIN", "Hide balances on app switcher", "Signed in on" device list, "Sign out everywhere", and "Sign out of this phone" (signs out all profiles on the phone; school data stays; next login needs a new code).
- **Notification tiers and delivery:** Urgent (breaks quiet hours, repeats once after 5 minutes; iOS Time Sensitive), High (banner in school hours, waits overnight), Normal (silent, grouped). Android channels: Safety, Fees, Bus, School updates, Messages. WhatsApp fallback after 30 minutes without open for fees and pickups; SMS only for gate safety. Quiet hours default 9 pm to 7 am (end-to-end journey settings board shows 9 pm to 6 am).
- **Design tokens:** listed in Part 6. Fonts: Outfit and Plus Jakarta Sans.
- **Platform sizes:** iOS icon 1024 x 1024, Android adaptive 108 dp with 66 dp safe zone, Play icon 512 x 512, Play feature graphic 1024 x 500, App Store screenshots 6.7 inch.
- **Versioning shown:** "Dhruva One 2.4" in the Me tab footer (sample).
- **Integrations shown:** UPI payments, SMS OTP, WhatsApp (OTP alternative, receipts, fallback alerts), native push (APNs/FCM implied, not named).

WhatsApp channel

- **Channel:** school's own verified number on the WhatsApp Business Platform via a Meta-approved provider, green tick required. Launch prerequisite listed on the Overview. Chat shows the standard Meta "secure service" banner.
- **Identity:** the sender's mobile number is matched to school records (parents: guardian numbers on the student record; teachers: school records; staff: HR records). No password or OTP; PIN only for payslips.
- **Message templates:** pre-approved by Meta; school-initiated alerts are charged per alert, user-initiated replies cost less or nothing (rates to be confirmed with the provider). Interactive features used in the design: reply buttons (up to 3 per message), list messages, call-to-action link button, flows (forms), documents (PDF), location, voice notes, images.
- **Payments:** UPI inside the chat with Google Pay, PhonePe, Paytm, BHIM UPI; money goes straight to the school account; order reference format "RC-30513"; receipt PDF returned. Dhruva never asks for UPI PIN or OTP. Setting "UPI fee payments in chat" is toggleable by campus admin.
- **Document formats:** receipts, date sheets, report cards, payslips, holiday list as PDF with file name pattern (for example Payslip_Sep2026_<Name>.pdf).
- **Opt-out:** replying STOP turns school alerts off; opt-in at admission.

- **Language:** staff chat has full Hindi and English string sets; parent and teacher prototypes are English only (the Overview says replies are in the language people choose).
- **Stats on admin card (sample):** 1,284 chats this week, 91% answered by Dhruva, 9% handed over, 4 sec average reply.
- **Audit:** every action logged (Overview, step 4 and "Same rules as the app").

B2B website

- Single component with state: page, menu, sol, reason, type, size, role, form fields, consent, tried, sent, login (mobile, otp, pick, step), night, faq index, toast.
- Sign-in directory (sample): 9876543210 -> DPS Gurugram (code DPSG45); 9812345678 -> Saraswati Vidya Niketan (SVN001); 9898989898 -> DPS Gurugram and Greenfield Public School (GFPS22); other numbers unregistered.
- Claims on the Trust page are labelled sample and unverified. Integrations on Home are labelled sample.

Platform-wide topics

- Tenant model: group tenant (campuses as sub-units with campus-scoped data and campus-level access) vs standalone tenant; profile = (phone number, tenant, role); child links created by the school office; staff profiles gated by PIN/Face ID; web re-PIN after 15 minutes.
- Notification channels: push (primary), WhatsApp (fee and pickup fallback after 30 minutes unopened), SMS (gate safety only); tiers Urgent/High/Normal; quiet hours 9 pm to 7 am.
- Data import: 8 Excel templates per campus (see section 1), validation for missing phones, duplicates, non-existent classes; fee amounts not copied between campuses.
- Approval thresholds: ₹25,000 concession (principal to owner), ₹50,000 purchases (principal), ₹5 L (owner); HoD leave 2 days; group leave: principal up to 3 days.

Appendix B

Approvals, notifications and permissions

Who sends, receives and approves what, chapter by chapter.

Group Owner

- Receives: concessions above Rs 25,000, fee refunds, new teaching posts; onboarding blockers; campus alerts (attendance below 92%, fees below 90%).
- Approves with a note back to the requester (Approve/Decline). Requests appear to be notified automatically ("requester notified", "a note was sent"); every decision is logged (phone footer).
- Sends: group or one-to-one notices to principals, teachers, all staff and parents on app and WhatsApp; fee reminders to a campus's parents with dues; "Ask for a plan" and "Plan a visit" requests to a principal; "Ask finance to review"; scheduled report emails to himself, the CFO (Mr. Anand Rao), all 14 principals or the HR head.
- Scope: group-wide read access across all 14 campuses; can open any single campus (drawer) or filter calendar and reports to one campus. The owner never edits campus classroom data here. Not shown: any role-management screen.
- Chairman's own leave, salary and approvals are not part of this view.

Principal

- Principal approves: results publication, staff leave (recommended by HoDs), payroll, small concessions (sibling discount; limit Rs 25,000), teacher-drafted notices to parents; acknowledges safety incidents.
- Principal escalates: concessions above Rs 25,000 (to the owner), new posts (to the owner), own leave (to the group HR head, chairman's office copied; over 3 days also the chairman).
- Sends: notices to parents (All parents, Classes 9–12) and staff on app and WhatsApp; WhatsApp to parents (Message parent, fee reminders); requests to class teachers ("Ask CT to call"); calendar events; invite to meet parents.
- Receives: group-office notices (Me > Notices), accounts notes, safety alerts, teacher leave requests, drafted notices.
- Scope: this campus only; group averages shown for comparison; cover for absent teachers is the academic coordinator's job.

Standalone School Admin

- Admin approves: staff leave requests (one tap), October salary for staff after confirming the monthly changes, cover assignments, parent notices (she sends them herself), admission offers.
- Chairperson (Mr. R. K. Gupta) approves: the admin's own leave, the admin's own salary, any fee waiver; he can read the payroll and the refund log and nothing else. There is no board for the chairperson in this set; the permission is stated in text on Today, Money and Me.
- Sends: WhatsApp and SMS fee reminders (individual or all 94), app and WhatsApp notices to parents, WhatsApp admission forms and visit messages, app messages to teachers (cover assignments, attendance reminders, exam duty).
- Receives: leave requests from teachers, enquiries from the front office and website, attendance status from class teachers, notices addressed to the admin (Me > Notices, 3).
- Scope: one school only; no campus switching and no group view.

Academic Coordinator

- **Sends:** substitute assignments (to substitutes on the app, class teachers updated); reminders to teachers for lesson plans and pace check-ins (HoDs copied); remedial group notices (teachers and parents); catch-up period notices to teachers; parent query replies on the app (class teacher copied); timetable approval message to teachers, HoDs, parents (app notification and WhatsApp) and students; notices to teachers (composer shared with principal).
- **Receives/acts on:** approved leave from the principal (to know who is away); HoD lesson-plan reviews; teachers' daily pace check-ins; parent queries; HoD requests to move sections (e.g. 8–C) and extra periods (HoD view of the same data); principal and chairman notices, exam duty swaps ("Swaps go through Mrs. Rekha Sinha, academic coordinator").
- **Approves:** the timetable, per class (one, some, all). Her own leave goes to the principal, with an in-charge who handles cover and exam queries.
- **Scope:** whole campus (DPS Gurugram Sec 45), all classes 1–12 and all departments. No campus switcher is shown on this role; group-level people see the same data across campuses elsewhere.

Head of Department

- **Approves:** team leave up to 2 days outside exam weeks; lesson plans (approve or send back with feedback); Maths question papers (approve to exam cell or send back to setter).
- **Sends up:** leave over 2 days or in exam week to the principal (with recommendation and cover plan); catch-up periods and section moves (e.g. 8–C to Ms. Chawla) and resource requests to the academic coordinator; own leave to the vice principal (principal if over 2 days).
- **Sends down:** notes to one teacher or all 18 (teacher Inbox under "From your HoD"), reminders for plans and pace check-ins, class observation bookings (appear on the teacher's timetable), agenda for the Thursday meeting.
- **Receives:** teacher plans, papers, leave, daily pace check-ins, homework statistics; coordinator's cover arrangements; exam cell moderation outcome.
- **Scope:** own department only (Maths, Classes 6–12, 18 teachers). Whole-school views belong to the academic coordinator; no campus switcher shown.

Exam Cell

- **Approves:** question papers for print (after HoD approval); teacher-for-invigilation swaps and assignments (informs teachers on the app); publication of date sheets.
- **Sends:** reminders to paper setters and HoDs, to teachers for marks entry, check requests per teacher, WhatsApp requests to parents for CBSE data, date sheet publication to teachers, students and parents, report cards to the principal for approval, notices about exams.
- **Receives:** papers from HoDs, approved leave (for invigilation gaps), marks entered by teachers, parent WhatsApp replies on CBSE records.
- **Scope:** whole campus (DPS Gurugram Sec 45), all classes. Class 1–5 tests are set by class teachers. No campus switcher shown.

School Counsellor

- **Receives:** referrals from teachers (class teachers and subject teachers), accounts (fee-related cases, e.g. Kabir Singh), self-referrals and session requests from the student app (private), attendance and marks signals, transport records in case history.
- **Sends:** private booking notices to students, parent meeting invitations and messages (reviewed before sending), stream reports to parents, reminders to students for the interest survey, WhatsApp invites for programmes.
- **Approves:** nothing for others; her own leave goes to the principal (booked sessions move and students are told privately).
- **Privacy and permissions:** notes and case history are visible only to the counsellor; teachers and parents see only what she shares. Dhruva suggests, the counsellor decides. Scope is the campus; no campus switcher shown.

Teacher

- Teacher sends: attendance to parents (WhatsApp, absentees only) and, for repeat absence, a flag to Mrs. Sinha; marks to parents at 4 pm or to Dr. Desai first; homework marks and comments to students and parents; reminders for missing homework to student and a parent; replies and broadcasts to parents and students (optionally in Hindi; read counts back); notes to students (parents told on WhatsApp optional; schedule or pull back); lesson plan and question paper to Dr. Desai (HoD) then exam cell; end-of-day pace to Dr. Desai and Mrs. Sinha; remedial list to Mrs. Sinha; counsellor referrals to Ms. Bhalla (reason private); leave and out-on-duty to Dr. Desai with the in-charge named.
- Teacher receives: parent and student messages, HoD feedback and meeting notes, cover assignments from Mrs. Sinha (cover for Mr. Anil Kapoor), duty rosters, owner/group/principal notices, Dhruva's task list.
- Scope: a teacher sees only their own classes (10–B, 10–C, 9–C), their own duties, payslip and leave. Class teacher of 10–C has extra attendance and parent responsibilities and a class-teacher allowance on the payslip.
- Group vs school: phone shows one login with several profiles (teacher at DPS Gurugram; parent at DPS Noida and at Saraswati Vidya Niketan, Karnal) with PIN or Face ID for staff profiles. Desktop is single-campus. No group-wide data is visible to the teacher.

HR and Payroll

- **Receives from HoDs:** approved attendance corrections and approved leave, to verify what changes pay. **Receives from Principal:** notices, approval of payroll, approval of final settlement, leave decisions; from the owner: notices.
- **Sends:** payroll to the Principal (Ms. Neelam Mehra) for approval; final settlement to the Principal; reminders to staff and joiners on the app or WhatsApp; police verification forms and contract renewal drafts; HoD review request for probation; demo class

invitations (HoD told); payment notes to an agency. Staff are "told on the app" after leave decisions.

- **Approval chains (configurable per payroll):** "Principal approves"; "HoD confirms, principal approves" (Visiting); "Principal approves invoices over ₹1 lakh" (Contract).
- **Scope:** HR sees all 296 staff of Gurugram Sec 45 (193 teaching, 103 non-teaching). The design shows no campus switcher on this role; multi-campus reference appears only in sample data (for example an on-duty entry at DPS Noida, and long leave routing to a "group HR head").

Finance and Accounts

- Sends: concession requests to the principal (and owner for hardship); journals to the principal; "sent back" notes to the maker; reminders to parents on WhatsApp with a pay link; POs to vendors by email and WhatsApp; parent notice on bounced cheque; emails to vendors for missing PAN; filing packs to the CA; leave request to principal (and group finance head if over 3 days).
- Receives: maker requests from accounts assistant, transport in-charge, class teachers, admissions office and front office; principal's second approvals; owner/principal/group notices; Dhruva's alerts (6 today).
- Controls: maker-checker (no self-approval), principal second approval above ₹2 L, principal approval for POs above ₹50,000, audit trail of every action, month lock (changes then need the principal), closed account year is view-only.
- Group vs school: the board is single-campus (DPS Gurugram Sec 45, Tally company "DPS Gurugram Sec 45 (2026-27)"). Group involvement is shown only as "group finance head" (edits Account main; second approver for leave over 3 days) and the group owner's notices. No campus switcher on either finance board.

Admissions and CRM

- **Sends to families:** welcome WhatsApp (within 5 minutes of an enquiry), tour confirmation with map and parking, application link, admission fee reminder with pay link (3 days before expiry), offer letter (valid 7 days), welcome kit and uniform list, Open House reminders in English and Hindi, follow-ups.
- **Sends internally:** "accounts told" and "class teacher told" when the admission fee is recorded; leave to the Principal; the Principal (Ms. Neelam Mehra) is shown only as Open House host and leave approver, offers are not shown as needing her approval.
- **Receives:** website/referral/walk-in enquiries, replies to follow-ups (inbox), fee payments made in the app, notices.
- **Scope:** the counsellor sees the admissions season for DPS Gurugram Sec 45 (seats by grade, 410 seats). No campus switcher shown. Transport availability per stop is read from the transport route lists.

Security and IT

- **Receives:** problem reports from any staff app (Jobs), grouped by Dhruva; system alerts (camera offline); visitor and pickup events from the gate tablet; notices and leave decisions from the Principal and owner.
- **Sends:** assignments to guards and technicians ("told on his phone"), reports back to the reporter ("Resolved · <name> told"), exam-cell notification when the camera job is assigned, nudges to hosts of waiting visitors, host approval requests for walk-ins, parent calls and notifications on early pickups, WhatsApp to guards for the night roster, leave to the Principal.
- **Visibility:** the role sees only Security/IT matters for DPS Gurugram Sec 45 (12 guards, 2 technicians). No campus switcher is shown on this role.
- Hosts (teachers, accounts, principal's office) approve visitors; parents are the authority on pickups.

Transport and Bus Attendant

- **Attendant sends:** per-child "on the bus" / "not here" / "left at the stop" messages to parents; "Reached stop" to the parents at that stop; "School told: arrived"; handover confirmations to parents; "child stays on the bus" to Mr. Bhatt and the parent; SOS with location to Mr. Bhatt, the principal and the driver's phone; handover notes and help requests to the in-charge; leave to the in-charge.
- **In-charge sends/approves:** spare bus dispatch with message to 38 families in English and Hindi plus the school; "late bus" new times per stop to parents; reply or forward-to-coordinator for parent messages; route changes (updates parents, attendant list, fee bill); options for route review to the Principal; renewals to accounts; fee corrections and WhatsApp reminders (41 families); staff cover assignment (families told); leave to the Principal.
- **Receives:** attendant taps and notes, GPS speed and route alerts, class attendance (headcount check), parent messages with facts from taps, pickup list and fee ledger, fee sync from accounts.
- **Scope:** in-charge sees all 24 buses and 1,046 children of Gurugram Sec 45; attendant sees only her own bus and children. Spare attendants and drivers (Mrs. Rani Kumari, Mrs. Kamla Devi, Mr. Mohan Lal) are assigned as cover. No campus switcher is shown on these roles.

Parent

- **Parent sends:** leave requests (to class teacher, approval returns as a status and toast), PTM slot bookings, messages (routed by topic), consents (zoo trip), acknowledgements ("I have read this", visible to the school), payments (receipt via app and WhatsApp), reminders ("Remind me 2 days before" on WhatsApp), bus alerts (one stop before drop).
- **Parent receives:** school notices, class notices from teachers, bus route notices from the transport desk, fee reminders, receipts, marks and homework status, leave approval, PTM reminder the evening before.
- **Parent confirms for the child:** a leave request raised in the student app waits for the parent ("Confirm so Ms. Arora can approve").
- **Approvers elsewhere:** class teacher approves leave; Mrs. Pooja Malhotra is told of a "no" on consent.
- **Who sees what:** a parent sees only their own children at the selected school, with marks and fees visible to parents and to the child's own student app only. Children at another school or campus, and the parent's separate teacher role, are separate profiles with separate new-item counts.

Student, Classes 6 to 8

- Student sends: homework submissions (to the subject teacher), questions (to the subject teacher after a hint), leave requests (to parent, then class teacher), holistic reflections (to class teacher).
- Student receives: homework, notes, teacher replies, returned marks and feedback, quest and badge updates.
- Parent: confirms leave in the Parent app (the home task "Navya asked for leave" in the Parent board is the Senior-school counterpart). The parent sees the same homework and marks.
- Privacy: "Only you and your parents see your marks." House points are shared (house cup shows all four houses), personal marks are not.

Student, Classes 9 to 12

- Student sends: homework (to subject teacher), questions (to subject teacher after a hint), leave (to parent, then class teacher), reflection (to class teacher).
- Student receives: homework and revision notes from teachers, returned marks and feedback, Dhruva's study plan, teacher replies, career-session reminders (appear in the holistic card).
- Parent counterpart: the Parent app shows the same marks and homework and confirms leave.
- Privacy: marks and attendance visible only to student and parents; house standing is public across houses.
- No payment, message-the-parent or admin function exists in this role.

Phone app: sign-in, profiles and notifications

- **Sign-in permissions:** only registered numbers can sign in; the school office adds numbers (unknown number -> "Ask my school to add me"). A staff profile requires PIN or biometric on every switch (profile prototype: once per unlock; web: PIN again after 15 minutes). Payment and finance pages ask for PIN or biometrics ("Staff and finance pages ask for your PIN or Face ID before opening, even when you are already signed in").
- **Notification senders and who may send notices:** "the school sets who can send notices"; no marketing; students from Class 6 get homework and results only. Parents can adjust topics and quiet hours but cannot turn off safety alerts, early-pickup alerts or SMS for gate safety.
- **Approval-type notifications:** early pickup by someone new is Urgent with "Approve or refuse" (parent); "Decision waiting" for Principal and admin (opens "Today"); leave decided (staff).

WhatsApp channel

- **Receives (templates, school messages first):** listed above; each carries a clear next step button where it helps ("Pay by UPI", "Got it", "Mark now", "View payslip", "Alert me 5 min before").
- **Sends / triggers:** parent leave request (class teacher approves); teacher leave request (Principal approves, cover arranged by Dhruva); staff leave (manager) and advance (HR); breakdown report (transport desk alerted, parents informed if needed); attendance (parents of absentee messaged); homework (all parents of 5–B); drafted note to a parent.
- **Who sees what:** a parent sees only their own child; each parent sees only their own child's marks; payslips only behind PIN; unknown numbers get a polite refusal; Campus Admin sees the WhatsApp settings card and usage tiles. Role permissions and audit logs "from Dhruva One apply to every WhatsApp action".

B2B website

Not applicable as workflows. Content statements: approvals are described (group: principal up to campus limit, owner above; standalone: trustee approves admin's own leave, salary, fee waivers and may read payroll and refund log only; business: centre head, regional manager, head office). Demo requests go to sales by email within one working day (stated, not built).

Platform-wide topics

Covered in sections 2 and 4.

Appendix C

Glossary

Dhruva	The assistant (shown as a glowing orb). It prepares, drafts, explains and suggests; a person approves anything that changes a record or reaches a family.
Group	A set of campuses under one owner (sample: DPS Group, 14 campuses). The owner sees all campuses on one scorecard.
Campus	One school inside a group, with its own principal, staff, students and approvals.
Standalone school	A school outside any group (sample: Saraswati Vidya Niketan, Karnal) with its own admin and, where needed, a trustee.
Profile	A role at a school linked to one mobile number. One number can hold several profiles (for example parent at two campuses and teacher at one); they never mix.
Approval	A request that needs a named person to say yes, with a limit, a reason and a record of who decided.
Cover (substitution)	A period taught by a different teacher because the usual teacher is away.
PTM	Parent-teacher meeting.
HoD	Head of department.
PGT / TGT	Post-graduate teacher / trained graduate teacher (senior and middle school teaching grades).
CBSE	Central Board of Secondary Education; the exam cell uses it for board registration and date sheets.
OTP	One-time code sent to a mobile number; DhruvaOne has no passwords.
MVP	The first release scope of the product.
Tally	Accounting software the finance role posts to (as shown in the Finance chapter).